BREW GROUP MAINTENANCE

All Saeco fully automatic machines are equipped with a removable brew group. This patented technology allows you to thoroughly clean the parts of the brew group in contact with coffee and the entire brewing area inside the machine.

This brew group maintenance kit comes with 2 different O-rings, as shown on the previous page (small and large). Before starting the instructions on the following pages, overturn the brew group, and choose the correct O-ring size based on the images below. (The following images show the filter screen with the upper part of the brew group removed. This is for demonstration purposes only; the upper part of the brew group should never be removed.)

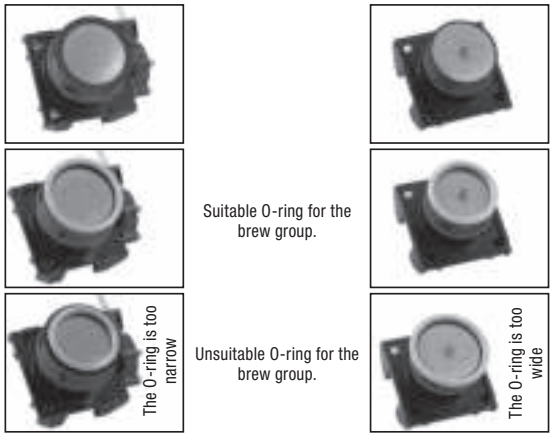

Wash the brew group with running water at least once a week. Lubricate the brew group tracks and replace the O-ring after approximately 500 brewing cycles.

WARNING! Do not wash the brew group with harsh or abrasive detergents or chemicals which could prevent it from operating correctly. Do not wash it in the dishwasher.

1



Rinse off any coffee residues from the brew group.

2

Wash the upper filter with running water.

3

Make sure the brew group is in the rest position; the two references must match.

4



Make sure that all components are in the correct position. The hook shown in the picture must be in the upright position. To check its position, press the “PUSH” button firmly.

5



The lever on the rear part of the brew group must be in contact with the base.

6

Remove the O-ring.

7

Insert the new O-ring.

8



Lubricate the brew group guides by using the supplied lubricant only.

9



Apply the lubricant evenly.

10

Apply the lubricant evenly.

ONDERHOUD VAN DE CENTRALE KOFFIE-UNIT

Alle superautomatische machines van Saeco zijn voorzien van een uitneembare Centrale Koffie-unit. Deze gepatenteerde technologie maakt het mogelijk om de onderdelen van de Centrale Koffie-unit die in contact komen met de koffie en de gehele infusiezone in de machine grondig te reinigen.

Alvorens te beginnen, dient men na te gaan welke O-ring geschikt is voor de Centrale Koffie-unit. Zonder het bovenste gedeelte van de Centrale Koffie-unit te demonteren (op de foto is dat alleen gedaan om de uitleg te vergemakkelijken), keer de Centrale Koffie-unit om en plaats de O-ringen op het bovenste gedeelte om na te gaan welke geschikt is.

Geschikte O-ring voor de Centrale Koffie-unit

Te klein
NIET geschikte O-ring voor de Centrale Koffie-unit

Te groot

De Centrale Koffie-unit dient tenminste eenmaal per week met stromend water te worden afgewassen. Smeer de Centrale Koffie-unit en vervang de O-ring bij ongeveer elke 500 afgiftes.

LET OP! Gebruik voor het reinigen van de Centrale Koffie-unit geen reinigingsmiddelen die het correct functioneren in gevaar kunnen brengen. Niet in de vaatwasmachine wassen.



Was de koffieresten uit de Centrale Koffie-unit.

Was het bovenste filter onder stromend water schoon.

Verzeker u ervan dat de Centrale unit op de ruststand staat; de twee tekentjes moeten samenvallen.



Controleer of de onderdelen in de goede stand staan. De afgebeelde hendel moet op de goede stand staan; controleer dit door krachtig op de toets “PUSH” te drukken.



De hendel aan de achterzijde van de centrale unit moet helemaal naar beneden staan.

Verwijder de O-ring

Plaats de nieuwe O-ring.



Smeer de geleiders van de Centrale unit uitsluitend met het bijgeleverde smeermiddel.



Verdeel het smeermiddel gelijkmatig.

Verdeel het smeermiddel gelijkmatig.