



Datenblatt - Fiche technique - Data sheet

21.15.0878




ROLINE S/FTP-(PiMF-)Patchkabel Kat.6a, Massivdraht, LSOH, grau, 70,0 m

Cordon ROLINE Cat.6a S/FTP (PiMF) solide LSOH, gris, 70,0 m

ROLINE S/FTP Patch Cord Cat.6a, solid, LSOH, grey, 70.0 m

Length (see below list)

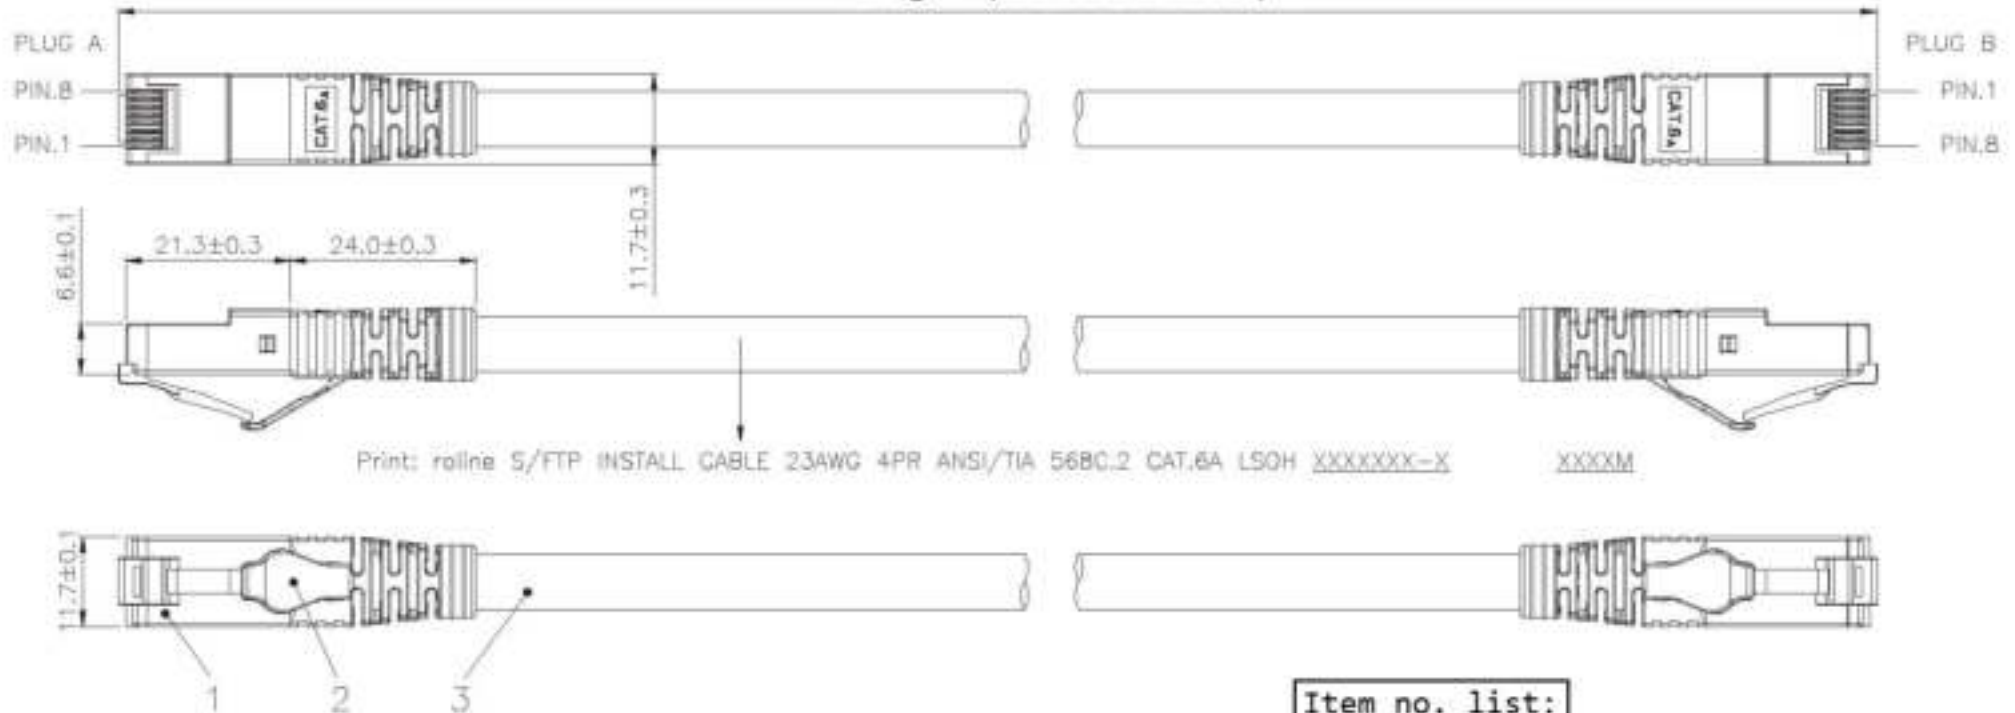

Specification :

Material :

1. RJ45 Plug :
 - 1-1. Housing : Polycarbonate, UL 94V-2, Blue color
 - 1-2. Contact finished : Min. 50 micro-inch Gold plating over min. 50 micro-inch Nickel plating on surface contact area
 - 1-3. Contact material : Phosphor Bronze
 - 1-4. Shield : Zinc Alloy with Nickel plated
2. SR : PC 2250 UL 94V-2
3. Cable : 23AWG Solid wire, wiring:T568B
 - 3-1. Jacket : LSOH, Gray(RAL7035)
 - 3-2. Conductor : 23 AWG Solid copper
 - 3-3. Isolation : Foam PE
 - 3-4. Shield : Aluminum Foil
 - 3-5. Cable structure : S/FTP, 4 twisted pair
4. Minimum of the bending radius: 50mm

Item no. list:

21.15.0874	20m	21.15.0878	70m
21.15.0876	30m	21.15.0879	90m
21.15.0877	50m		

Item no.	21.15.0874, 21.15.0876, 21.15.0877, 21.15.0878, 21.15.0879		
Description	ROLINE Cat. 6a S/FTP Patch Cord, Solid, LSOH, grey		
#: Matching DIM. *~*: Important DIM. Others: General DIM.	DRAWING	03.Jul.2014	byz
	CHECK	03.Jul.2014	Jane
	APPROVAL	03.Jul.2014	Frank
GENERAL TOLERANCE OF DIMENSIONS	SCALE	DATE	NAME
	SCALE	UNIT	mm
	DRAWING NO. ACBUEXX072XXXX(SA1)		
	DRAWING CLASSIFICATION		

rotronic

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER
1					