Going away?

- Short vacation: Leave the fridge operating during vacations of less than a month.
- Long vacation: If you are not going to use the fridge for longer periods, remove all food and unplug the power cord. Clean and dry the interior thoroughly. To prevent odour and mould growth, leave the door open slightly, blocking it open, if necessary. (Restrict children's access to the room with the open fridge to avoid creating a child entrapment risk.)

Moving the fridge

- Unplug the fridge and remove all food from inside. Securely tape down the drawer and shelves and tape the door shut. Turn the levelling feet up to the base to avoid damage.
- CAUTION: Never pick up the refrigerator by the door.
- Protect the outside of the unit with a blanket or similar soft material and make sure the fridge stays secure in the upright position during transportation.

Disposal of Old Appliances

Be sure to make any locks unusable, remove any door(s) and discard separately. Waring - chemical hazard: do not allow children to play with the old appliance. Contact your local authority for disposal procedures.

- Before disposing of an old appliance, please make sure it is switched off and safe.
 Unplug the appliance and break any locks in order to avoid children becoming trapped.
- Please note: refrigeration system contains gas and refrigerants which require specialised waste disposal. Some vulnerable materials in a refrigerator are not damaged prior to disposal. You can contribute to environment awareness by insisting on an appropriate non-polluting method of disposal.

Disposal of Packaging

Do not allow children to play with the packaging, and dispose of plastic bags safely.

The cardboard may be broken or cut into smaller pieces and recycled. Any
wrapping cover is made of polyethylene. The polyethylene pads and padding
contain no fluorochloric hydrocarbons, and as such are most suitable for adequate
recycling.


⚠ WARNING!

- Risk off child entrapment. Before you throw away your old appliance:
- Take off the doors.
- Leave the shelves in place so that children may not easily climb inside. Cut the connection cable (as close to the appliance as you can).
- If this appliance you are replacing features a spring lock (latch) on the door or lid, be sure
 to make that spring lack unusable before you discard the old appliance.
 This will prevent it from becoming a death trap for a child.

TEMPTECH

Refrigerator

Instruction Manual

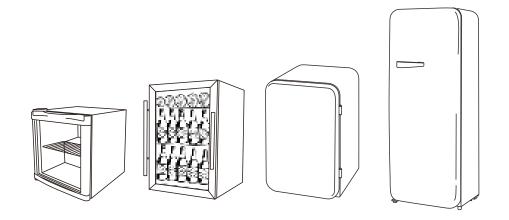

Content

Important Sefeguards	02-06
Part List	07-09
Handle InstallationInstallation Installation The Refrigerator	
Revesible Door Installation	13-15
Control Operation	15-18
Replacing Lamps	15-18
Food Storage	18
Energy Saving Tips	19
Trouble Shooting	20-21
Maintance & Cleaning	22

Important Safeguards

READ ALL INSTRUCTIONS

Read this manual thoroughly before first use, even if you are familiar with this type of product. The safety precautions enclosed herein reduce the risk of fire, electric shock and injury when correctly adhered to. Keep the manual in a safe place for future reference, along with the completed warranty card, purchase receipt and carton. If applicable, pass these instructions on to the next owner of the appliance. Always follow basic safety precautions and accident prevention measures when using an electrical appliance, including the following:

Electrical safety and cord handling

- Make sure your outlet voltage and circuit frequency correspond to the voltage stated on the appliance rating label. If this is not the case, contact the after sales support line and do not use the refrigerator.
- Do not use any other appliance at the same time on the same electrical circuit as it may overload the circuit and blow the fuse or circuit breaker.
- To protect against fire and electric shock, do not immerse the cord, plug, power base or the Retro Under Counter Fridge body itself in water or other liquid. Do not expose the electrical connections to water.
- The cord should be run in such a way that there will be no risk of anyone pulling it inadvertently or tripping over it.
- Do not kink, bend, squash, strain or damage the power cord and protect it from sharp edges and heat.
- Grip the plug when disconnecting, do not pull the cord.
- Do not let the cord hang over the edge of a table or bench top. Do not let it touch hot surfaces.
- Do not pick up or operate the appliance if the power supply cord or plug is damaged, or after it malfunctions or has been dropped or damaged in any way.
- In case of damage, contact the after sales support line for advice.
- A damaged cord or plug must be replaced by the manufacturer or a qualified person in order to avoid a hazard.
- Make sure all electrical connections are clean and dry before switching on.
- Do not use this appliance in conjunction with an extension cord.
- Unplug the appliance from the power outlet when not in use and before cleaning, servicing, maintenance or moving the appliance.
- This appliance is not intended to be operated by means of an external timer or separate remote control system.

Usage conditions and restrictions

- This appliance is intended for domestic use only.
- This product is not intended for commercial use. Do not use it outdoors.
- Only use this refrigerator as described in this manual. Any other use is not recommended and may cause fire, electric shock or injury.
- Improper installation and the use of accessories not recommended by the appliance manufacturer may result in fire, electric shock or personal injury and will invalidate your warranty.
- We assume no responsibility for any eventual damages caused by improper or faulty use.
- This appliance is not intended for use by persons (including children) with reduced physical, sensor or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliances by a person responsible for their safety.
- Children should be supervised to ensure they do not play with the appliance.
- Close supervision is necessary when any appliance is used by or near children.
- Do not use chemical, steel wool or abrasive cleaners to clean the outside of the unit, as these will scratch the metal surface.
- Do not operate the unit near liquids (kitchen sink, water basins, taps etc).
- Ensure that all the parts are correctly assembled before operation.
- Maintain the appliance in accordance with the instructions to ensure that it functions properly.
- If there is a product malfunction, or if it has been damaged in any way, call the after sales support for assistance.
- Immediately unplug the appliance if fire or smoke is emitted.
- Place the product on a straight, rigid and stable surface, away from sources of direct sunlight or excessive heat.
- Do not place the product near heat sources such as radiators, heat registers, stoves or other appliances that produce heat.
- Do not place the product near other items that may damage it, such as naked flame sources (lit candles) or objects containing water (a vase or fish bowl).
- Take care that no objects fall and no liquids are spilled into any openings.

⚠ WARNING!

- Prevent overheating: Place the product in a sufficiently aerated place. Ensure
 that air can circulate freely around the back of the refrigerator.
 To ensure best performance, leave a distance of about 100mm to all sides of
 the fridge.
- This appliance features a short power cord to reduce the risk of being entangled, and to reduce the risk of tripping. An extension cord or longer detachable cord is not recommended for use with this product.
- There are no user-serviceable parts inside. Do not attempt to service this product. Please call our after sales support for instructions.

FLAMMABLE - REFRIGERANT GAS WARNINGS



Danger! Risk of fire or explosion. Flammable refrigerant used. To be repaired only by trained service personnel. Do not puncture refrigerant tubing.

Safety information



Caution! Risk of fire or explosion. Flammable refrigerant used. Consult repair manual/owner's guide before attempting to service this product. All safety precautions must be followed.



Caution! Risk of fire or explosion. Dispose of property in accordance with federal or local regulations. Flammable refrigerant used.



Caution! Risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully. Flammable refrigerant used.

- The refrigerant isobutane (R600a) is contained within the refrigerant circuit of the appliance, a gas with a high level of environmental compatibility, which is nevertheless flammable. During transportation and installation of the appliance, ensure that none of the components of the refrigerant circuit become damaged.
- WARNING: Do not damage the refrigerant circuit! Never use an appliance
 with a damaged refrigerant circuit! If the refrigerant circuit becomes
 damaged, avoid proximity to open fires and all types of heat and ignition
 sources. Thoroughly ventilate the room in which the appliance is located.
- It is hazardous for anyone other than an authorised service person to service this appliance.
- The room for installing the appliance must be at least 1m³ per 8g of refrigerant. The amount and type of refrigerant in the appliance can be found in the Technical Specifications.

General safety

⚠ WARNING!



Do not use other electrical appliances (such as ice cream makers) inside of refrigerating appliances, unless they are approved for this purpose by the manufacture.

- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- During transportation and installation of the appliance, be certain that none of the components of the refrigerant circuit become damaged.
- · Avoid open flames and sources of ignition.
- Thoroughly ventilate the room in which the appliance is situated.
- It is dangerous to alter the specifications or modify this product in any way.
- Any damage to the cord may cause a short circuit, fire and/or electric shock.

⚠ WARNING!

- This appliance is heavy. Care should be taken when moving it. To avoid back
 or other injury, consider a two person lift or mechanical aid when installing it.
 Failure to do so can result in back or other injury.
- Avoid prolonged exposure of the appliance to direct sunlight.
- This appliance is intended to be used in household only.

⚠ WARNING!

- Any electrical components (plug, power cord, compressor and etc.)
 must be replaced by a certified service agent or qualified service personnel.
- DO NOT USE AN EXTENSION CORD. Use an exclusive wall outlet. Do not connect your refrigerator to extension cords or in an outlet used by any other appliance.
- Make sure that the power plug is not squashed or damaged by the back of the appliance. A squashed or damaged power plug may overheat and cause a fire.

Safety information


- Before first use, it is advisable to wait at least eight hours before connecting the appliance to allow the oil to flow back in the compressor.
- Adequate air circulation should be around the appliance, lacking this leads to overheating. To achieve sufficient ventilation follow the instructions relevant to installation.
- The appliance must not be located close to radiators or cookers.
- Make sure that the mains plug is accessible after the installation of the appliance.


Daily use


- Do not put hot food in the appliance.
- Store pre-packed food in accordance with the food manufactures instructions.
- WARNING! Do not use mechanical devices or other means to accelerate the
 defrosting process. Never use a sharp or metal instrument to remove frost or
 clean the appliance. Use a plastic scraper, if necessary.
- Appliance storage recommendations should be strictly adhered to. Refer to relevant instructions.
- If the refrigerator is unplugged, turned off or has lost power, you must wait 3 to 5 minutes before restarting the unit. If you attempt to restart before this time delay, the refrigerator will not start.

SAVE THESE INSTRUCTIONS

Parts List

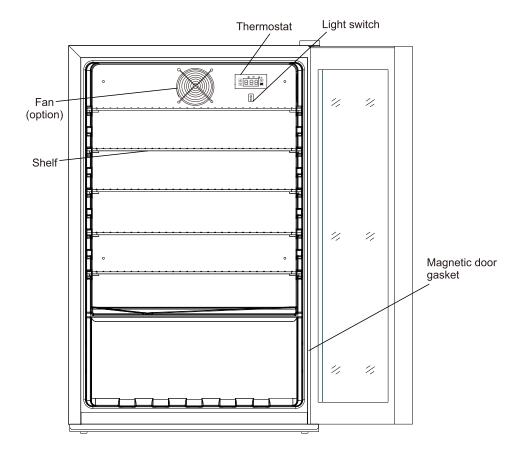

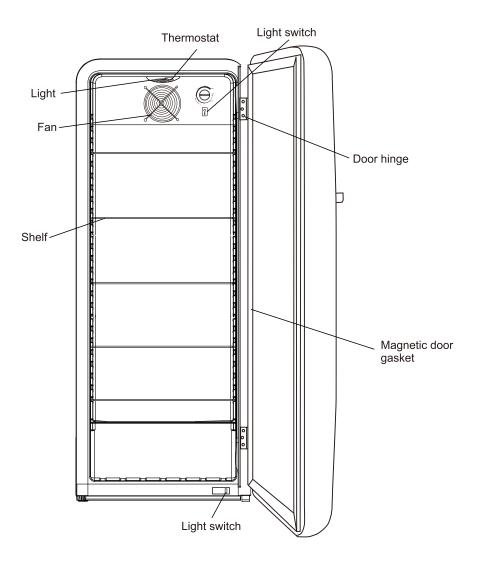

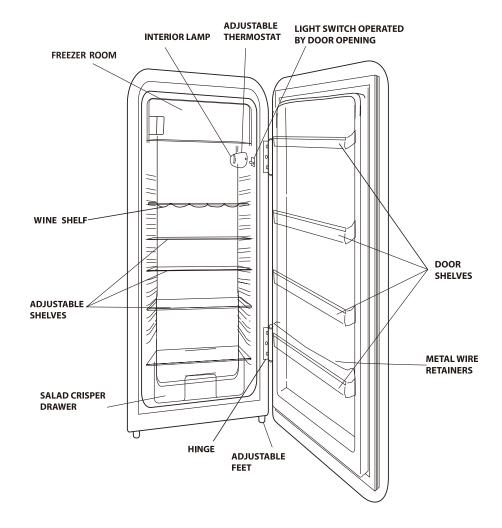

Getting Started

Unpacking

- This product has been packaged to protect it against transportation damage. Remove all packaging materials from around and inside the appliance, but do not remove any foam insulation surrounding the pipes at the back. Keep the original packaging carton and materials in a safe place; it will help prevent any damage if the product needs to be transported in the future, and you can use it to store the appliance when it is not in use. In the event that the carton is to be disposed of, please recycle all packaging materials where possible.
- Plastic wrapping can be a suffocation hazard for babies and young children, so
 ensure all packaging materials are out of their reach and disposed of safely.
- Parts: Check to ensure you have all the parts pictured on the previous page spread.
- Unwind the power cord to its full length and inspect it for damage. Do not use
 the appliance if the appliance or its cord have been damaged or are not working
 properly. In case of damage, contact our after sales support line for advice
 on examination, repair or return of the damaged product.
- Make sure the refrigerator is disconnected from the power supply before
 cleaning the interior surfaces and all internal accessories with lukewarm water,
 a soft cloth and a neutral/mild soap/detergent. This will remove any dust from
 transit and storage and help remove the typical smell of a brand new product.
 Then dry thoroughly. Important: do not use harsh or abrasive detergents or
 powders as these will damage the finish.

Door handle installation

There are several types of handles for different models. Please check which type of handle on your unit.

Type I:

- The door handle comes unattached due to packaging restrictions. It is easily attached following the instructions below.
- Align the screw holes in the handle with the mounting points on the screw base pre-fitted to the fridge door.
- Attach the handle with the supplied screws using a Phillips head screwdriver.
- Ensure the handle is secured firmly into position on the handle base, as illustrated.



ATTACHING DOOR HANDLE

- 1. Fasten the #1 Door Plate to the refrigerator door by using four #2 Screws.
- Place the #3 Door Handle onto the #1 Door Plate, then secure with two #4 Screws.




Type II:

The door handle comes unattached due to packaging restrictions. It is easily attached following the instructions below.

 Align the screw holes on the handle base with the holes in the fridge door, then affix the handle base with the supplied four screws using a Phillips head screwdriver.


Slide the handle firmly into position on the handle base, as illustrated, until it clicks securely into place.

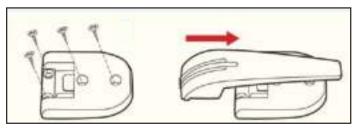

Type III:

The door handle comes unattached due to packaging restrictions. It is easily attached following the instructions below.

- Fix the two screws(1) on the door.
- Put the metal handle(2) into the two fixed screws, match the two holes on the handle.
- Fasten the lower two screws(3) on the handle lower.



Installing the refrigerator

- Before installing your new fridge, read all safety instructions in this manual, then follow the instructions below:
- Place the fridge on a sturdy, level floor for quieter operation. Ensure that the floor is strong enough to support the fridge when it is fully loaded.
- If the refrigerator is to be placed on carpet, support it with a wooden board underneath. Be aware that placing the refrigerator on carpet may mean that heat from the compressor may cause the carpet to fade.
- This appliance is designed to be freestanding only and should not be recessed or built in.
- Do not tilt the fridge more than 45° from upright when moving it.
- Avoid areas where the appliance would be exposed to direct sunlight, sources
 of heat (stove, heater, radiator, etc.), extreme cold ambient temperatures or
 excessive moisture and high humidity. Installing it in the coolest area of the
 room will save energy consumption and running costs.

⚠ WARNING!

 Handle with care! Do not apply force to any part such as the condenser or door. The metal rails on the bottom underneath of this refrigerator may have sharp edges, so always unpack and handle with care. Do not drag the unit: place it carefully in position to avoid scratching the floor.

Space requirements

- Place the unit so there is enough space for the door to open.
- Ensure that air can circulate freely around the back of the cabinet, which is necessary to cool the compressor and condenser. Allow at least 100mm clear space at the back and 50mm at the sides of the unit.

Levelling

- The appliance must be installed level in order to work properly. If the unit is not level, the doors and magnetic seal alignments will not be covered properly.
- To level the unit, adjust one or both levelling feet at the base of the unit.



REVERSIBLE DOOR


You will need to tilt the fridge backward to access the lower hinge which holds screws. Do not tilt more than 45 degrees and do not lay the fridge flat on its side.

Reversing the door:


1. Remove the top plastic hinge cover and set aside



2. Unscrew the 3 screws from the metal bracket and set aside, carefully remove the door and place it on a cushioned surface.




3. Remove the plastic insert on the opposite side of the fridge and door. Now fix the top door bracket to this side using the screws that were previously removed. Replace the plastic hinge cover.



4. Remove the adjustable foot at the bottom of the fridge and set aside.

5. Unscrew the two screws holding the bottom door hinge and carefully move it across to the opposite side and before fixing it into position fit the door to the top and bottom hinge (care must be taken as the door will be loose). Once this has been completed screw in the adjustable foot to the opposite side of the fridge.



Check that the door opens and shuts correctly after you have completed the door reversal process.

The appliance must now be upright for a minimum of 3 hours before turning it on.

REVERSING THE DOOR HINGE FOR RETRO



The door can be opened from left to right and vice versa. Should you wish to change the opening direction, please follow these instructions.

Note: All parts removed should be kept safely. You will require these for the reinstallation of the door.




Fig 1 Position of components prior to reversal of the door hinge.

Fig 2 Position of components after reversal of the door hinge.


- Support the door from the bottom
- Remove the six screws that affix the hinges and two spacers to the cabinet frame
- Place the door flat on a padded surface to prevent scratching
- Remove the six hinge screws that affix the hinges to the Retro door
- Remove the blanking plugs from the opposite side and use to plug the holes exposed by the removal of the hinge
- · Screw the hinges onto the opposite side of the door
- Pick the door up and carefully align with the cabinet holes
- Screw the remaining six screws into both hinges and the two spacers into the cabinet to secure the door.

There are several types of controller/thermostat for different models. Please check which type of controller on your unit.

Mechanical Controller


 The mechanical thermostat temperature control and the LIGHT on/off switch is located at below places:

Type I:



Type II:


Back of unit



Type III:

Thermostat control Light switch

Type IV:



Setting The Temperature Control:

- To start the refrigerator, turn the temperature control to the position corresponding to the desired cooling.
 - The temperature of the refrigerator is controlled by adjusting/setting the thermostat control knob, located on the top in the cabinet.
- The settings 0(OFF) 5(MAX) regulate the interior temperature of the refrigerator. Setting 0(OFF) = not operating (Please press the knob and turn to get the "0" position)
 - Setting 1(MIN) = lowest setting (warmest internal temperature) Setting 5(MAX) = highest setting (coldest internal temperature)

NOTE: The refrigerator temperature will vary depending on the quantity of cans/ bottles stored and on the frequency with which the door is opened. The internal temperature varies in different parts of the refrigerator. The back of the refrigerators is coldest. Please keep the cans/bottles away from the rear wall to avoid freezing the bottles and to allow circulation of cold air.



NOTE: Thermostat 0(OFF) position indicates the refrigerator is turned off although power is still being supplied. By turning the thermostat dial to the left, the refrigerator will turn on automatically. When the refrigerator is not to be used for a long period of time, disconnect the plug and leave the door partially open.

DEFROSTING


The surface of the evaporator ices up when the Refrigerator is working. This is an entirely normal part of operation. If the frost layer is more than 3mm/1/8" thick, the Refrigerator must be defrosted and cleaned to avoid unnecessary energy consumption and inefficient operation.

- Remove all items inside and unplug the Refrigerator.
- After defrosting, clean the Refrigerator and allow it to dry.
- · Reconnect to the mains supply and run the refrigeraror.

Electronic Controller

The electronic controller is located on the evaporator fan fix plate inside of the unit.

It looks like this:

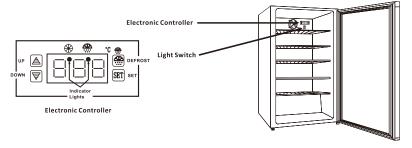

During normal operation the controller display will show the temperature inside the refrigerator.

A small indicator light will illuminate under the 'Cooling' symbol to confirm the fridge is in its normal cooling mode, and compressor is running. When temperature is reached and the compressor is in its 'off' cycle, no indicator

light will illuminate in the controller:



Operation of th controller:

- To set the desired temperature of the fridge:
 - Press the LT button once. A 'beep' will sound, and the display will start to flash.
 - buttons to set to the desired temperature. Use the
 - Press [17] again to complete the operation, or just leave it for 5-10 sec, and the display will revert back to showing internal temperature, while new settings saved.




The fridge is built to automatically defrost and prevent any ice forming on the Evaporator.

When in a 'Defrost' cycle, the indicator light

will illuminate under the 'Defrost' symbol:

- To manually activate 'Defrost' cycle:
 - Press the button, and hold it for 6 seconds, until a 'beep' is heard.
 - The indicator light will now illuminate under the 'Defrost' symbol and the fridge is into a 'Defrost' cycle.
 - 'Defrost' will run for 20mins, and then automatically revert to normal operation.
- To manually change back to normal operating mode from the 'Defrost' mode:
- Press the 📳 button again, hold the botton for 6 seconds, until a 'beep' is heard.
- Both indicator lights under the 'Defrost' symbol and under the 'Cooling' symbol will flash $\begin{tabular}{c} \textcircled{\$} & \textcircled{\$} \\ \hline (\begin{tabular}{c} \put(0,0) \put$
- After 5-20 minutes, only the indicator light 'Cooling' symbol to confirm the fridge is back in its normal cooling mode.

Touch Screen Controller:





Touch Screen Controller

Lock/Unlock:

To unlock the digital interface, press both A and T at the same time and hold for 1 second, and the buzzer will sound a beep, digital interface is unlocked. The digital interface will be locked automatically if no operation in 6 seconds.

- Set Temperature:
 - After unlock, press in first, then press or in button to increase or decrease the degree, after a few seconds without any operation, the temperature is selected. If no other further operation in 6 seconds, display will show actual temperature in the refrigerator.
- Light:

After unlock, press light button once to turn on the light. To turn it off, press light button again.

- Celsius Degree/Fahrenheit degree: After unlock, press (%) button for 3 seconds to change to Fahrenheit degree mode, repeat the same interaction will go back to Celsius Degree mode.
- NOTE: Wait 3 to 5 minutes before restarting if operation has been interrupted.
- NOTE: The temperature of the freshly stored food and how open the door is opened affects the temperature in the refrigerator compartment. If required, change the temperature setting.

Replacing Lamps

Your fridge is using long-life, energy-saving LED light. Should you need to replace this light, please contact your nearest stockiest or service agent for a suitable replacement part.

To change the light:

- 1. Unplug the power plug and ensure the light is off.
- 2. The model is with light cover, take out the cover by pressing it and turning it clockwise lightly, then remove the screws on both sides.
- 3. Gently pull out the connectors, take out the whole light box, but keep the controller and thermostat dial.
- 4. Insert the connectors into the new light box, place the controller and thermostat dial back, and fasten them.
- 5. Put the light cover back by turning it anticlockwise.

Food storage

- The refrigerator compartment is suitable for short-term storage of fresh food.
 The temperature inside varies depending on the amount of food stored, the ambient temperature and the frequency of door opening. Adjust the thermostat accordingly.
- In order to maintain good cooling efficiency and save energy, we recommend you do not open the door for too long or too often. Do not overload the fridge, and keep enough space around items for cold air flow. Do not block ventilation openings.
- The walls of the fridge are equipped with a series of runners so that the shelves can be positioned to suit individual storage requirements.
- In order to keep fruit and vegetables fresh in the salad drawer, make sure they are properly packaged and the cover sits firmly on top of the salad drawer (applicable model).
- Two wine bottles can be stored conveniently in the shelf-hanging wine rack. If you do not require this wine rack, or to remove it for cleaning, pull the shelf that holds the rack completely out of the fridge, then slide the wine rack off the side of the shelf (applicable model).





Energy saving tips

- Place the fridge in the coolest area of the room, away from heat-producing appliances and out of direct sunlight.
- Let heated food and beverages cool to room temperature before placing them into the fridge.
- Do not overload the fridge as it forces the compressor to run longer.
- Wrap foods properly and wipe containers dry before placing them in the fridge.
 This cuts down on frost build-up inside the fridge.
- Do not line any fridge storage bin with aluminum foil, wax paper or paper towels.
 Liners interfere with cold air circulation, reducing cooling efficiency.
- Position food so that air can circulate freely around it.
- Do not leave the fridge door open for longer than required.
- Make sure no food touches the back of the compartment.
- Don't set the thermostat on exceeding cold temperatures.

Trouble shooting

Problem	Solution
The fridge doesn't work	Check that the appliance is switched on.
	Check that there has not been a power cut.
	Check that the plug is not faulty.
	Check that the fuse has not blown.
	Check that the voltage is correct for the appliance.
	Are there any faults with the socket? For this purpose, try the plug of your appliance by connecting it to a socket which you are sure is working.
The temperature inside the appliance is not cold enough	Check that there is not too much food in the appliance.
	Check that the thermostat is set to a suitable temperature.
	Check that the appliance is not placed in direct sunlight, or too near to a heating source.
	Check that the ambient temperature is within the operation limits of the appliance.
	Are the doors of the appliance opened frequently? Once the door is opened, the humidity found in the air in the room enters the appliance, especially if the humidity levels in the room are very high. The more frequently the door is opened in humid conditions the more chance of the build up of moisture.
	The door is not closed completely.
	The door gasket does not seal properly.
	The cooler does not have the correct clearances at the sides/back.
The temperature within the appliance is too cold	Increase the working temperature by adjusting the thermostat to a lower setting. The highest setting should only be used as a rapid cool setting and should only be set 2 hours before a large amount of food is placed in the fridge. If this is not done the temperature in the fridge compartment could fall below 0°C as the compressor will run continuously.
Moisture forms on the inside or outside walls of the fridge	Hot and humid weather increases the internal rate of frost build-up. This is normal.
	Open the door less often and make sure it is always properly closed.
The outer surfaces of the appliance are wet	Condensation will from on the outside of the cooler if it operates in moist areas, simply wipe it dry.

Trouble shooting

Problem	Solution
Smell/odour	Check all the food and drink that is in the fridge is in date and correctly packaged. If it isn't then it should be removed immediately or repackaged.
	Check for spillages on each shelf, rack and drawer. You may need to remove the drawers to check that no spillages have settled underneath them. Spillages that have not been cleaned and have been left can cause smells and unwanted odours.
The doors do not close properly	Ensure there are no obstructions preventing door closure.
	Check the door compartments and shelves are correctly in place.
	Check the door seal is not warped or torn.
	Check the appliance is level.
Unusual noises	Check that the appliance is on a flat, level surface and is stable.
	Check the spacing's around the appliance and ensure it is not touching other items.
	Bubbling and gurgling sound: • This noise is emitted as the coolant fluid flows through the pipes within the system. This is normal.
	Water flowing sound: • This is the normal sound of water flowing into the drain trough during the defrosting process.
	If the appliance is operating noisily (compressor noise): This is normal. This noise indicates that the compressor is operating normally. As the compressor is being energized, it might run a bit more noisily for a short period of time.
	Contraction and expansion of the inside walls may cause popping and cracking noises.
The fridge door will not open.	If the door has just been opened, leave it for a few minutes to allow the air pressure to equalise before trying again.
The compressor runs continuously.	The temperature is set too cold: select a lower(warmer) setting.
	The door is open, or something is obstructing proper door closure.
	The door gaskets are worn, dirty or damaged.
	Large quantities of food have been added to the fridge.
	The room temperature is hotter than usual.
The external fridge surface is warm.	The exterior walls can be warmer than room temperature. This is normal while the compressor works to transfer heat from inside the fridge cabinet.

Maintenance & Cleaning

Disconnect the appliance from the power supply before cleaning.

Internal Cleaning

- Do not pour water over the appliance.
- The cavity should be cleaned periodically using a solution of bicarbonate of soda and lukewarm water (5ml to 0.5 litre of water)
- Clean the accessories separately with soap and water. Do not put them in the dishwasher.
- Do not use abrasive products, detergents or soaps.
- After washing, rinse with clean water and dry carefully.
- When you have finished cleaning reconnect the plug with dry hands.

External Cleaning

- Wash the outer cabinet with warm soapy water. Do NOT use abrasive products.
- There are sharp edges on the underside of the product so care should be taken when cleaning.
- Once or twice a year dust the rear of the appliance and the compressor at the back of the appliance, with a brush or vacuum cleaner, as an accumulation of dust will affect the performance of the appliance and cause increased energy consumption.

⚠ WARNING!

- Never clean the unit with an abrasive, acid, oil or solvent based cleaning agent, or with abrasive pads or scourers. Never use flammable fluids or sprays for cleaning as the fumes from these substances can create a fire hazard or explosion.
- Never clean the appliance with a steam cleaner. Moisture could accumulate in the electrical components, danger of electric shock! Hot vapours can lead to the damage of plastic parts.
- The appliance must be completely dry before it is placed back into service.
- Ethereal oils and organic solvents can attack plastic parts, e.g. lemon juice or the juice from orange peel, or cleansers that contain acetic acid. Do not allow such substances to come into contact with the appliance parts.