

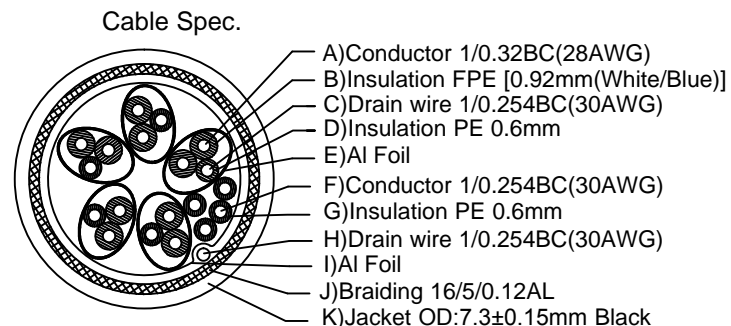


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/12/29	

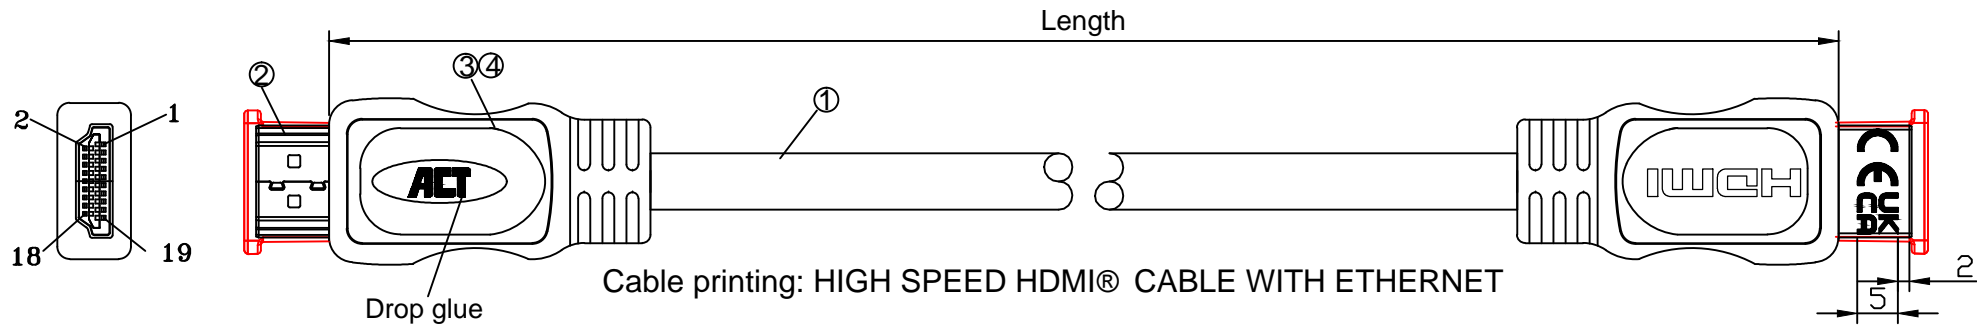

Signal Assignment

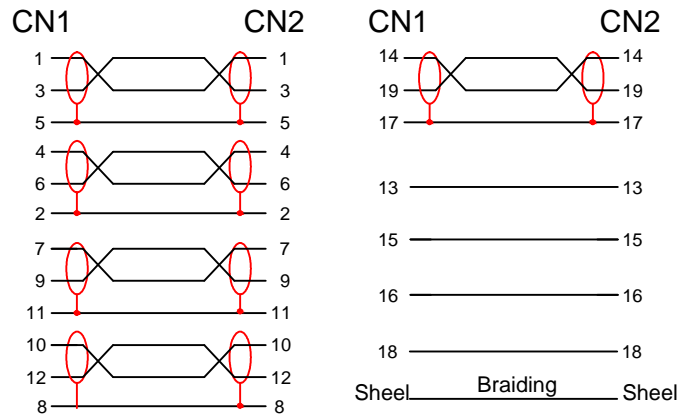


Remark:

- 100% Open/Short Test
- Conductive Resistance:5ohms MAX
- Insulation Resistance:10M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is Reach/RoHS 2.0 compliant.
- Support 1080P/3D/4K*2K@60Hz

Item NO.	Length(m)
AC3800	1.5m
AC3802	2.5m
AC3805	5.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	HDMI Protective Cap, PE	2PCS	
④	External Mold Outer Mould 45P PVC, Black	2PCS	
③	Inernal Mold Inner Mould PE	2PCS	
②	Connector HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable 28AWG 2.0V (19+1BC) HDMI Cable OD:7.3mm (0.32BC+FPE)*1P+D+AL] *5C + (0.254BC+HDPE)*4C + AL + D + B PVCOD7.3mm		



ACT			
ERP NO.:		SAMPLE DWG NO.:	
Item No.:	AC3800/AC3802/AC3805	REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	HDMI 2.0V 19+1BC	PAGE NO	1/1
		DATE	2021/12/29
APPROVAL		CHECKED	
		DRAWN	