



User Guide

AC1200 Whole Home Mesh Wi-Fi System

Contents

About This Guide	1
Appearance	2
Set Up Your Deco	3
Dashboard	6
Wi-Fi Settings	8
Blacklist	9
Online Update	10
Advanced Features	11
WPS	16
Parental Controls	17
QoS	18
Monthly Report	19
Managers	20



About This Guide

This guide provides a brief introduction to Deco Whole Home Mesh Wi-Fi System and the Deco app, as well as regulatory information.

Note: Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP. All images, steps, and descriptions in this guide are only examples and may not reflect your actual Deco experience.

Conventions

In this guide, the following conventions are used:

Convention	Description
Deco	Stands for Deco Whole Home Mesh Wi-Fi System/Unit.
<u>Underline</u>	Hyperlinks are in teal and underlined. You can click to redirect to a website or a specific section.
Teal	Key information appears in teal, including management page text such as menus, items, buttons and so on.
 Note:	Ignoring this type of note might result in a malfunction or damage to the device.
 Tips:	Indicates important information that helps you make better use of your device.

More Info

- Specific product information can be found on the product page at <https://www.tp-link.com>.
- A Technical Community is provided for you to discuss our products at <https://community.tp-link.com>.
- Our Technical Support contact information can be found at the [Help](#) center of the Deco app and the [Contact Technical Support](#) page at <https://www.tp-link.com/support>.

Speed/Coverage/Device Quantity Disclaimer

Maximum wireless transmission rates are the physical rates derived from IEEE Standard 802.11 specifications. Range, coverage, and maximum quantity of connected devices are based on test results under normal usage conditions. Actual wireless data throughput, wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection quality, and client condition.

MU-MIMO Disclaimer

Use of MU-MIMO requires clients to also support MU-MIMO.

HomeCare Disclaimer

A basic TP-Link HomeCare™, powered by Trend Micro™, package is included for 3 years from date of activation at no additional cost. It includes Parental Controls, Quality of Service, and Antivirus. Deactivation of HomeCare™ will disable certain controls and protections. For a complete list of HomeCare™ functions, go to www.tp-link.com.

IoT Compatibility Disclaimer


IoT compatibility refers only to smart devices that can be controlled via the Deco app. Other wireless devices can still connect to Deco for normal Wi-Fi use.

Seamless Roaming Disclaimer

Clients need to support 802.11k/v/r and may require additional set up. Performance may vary depending on the client device.

Appearance

Each Deco has an LED that changes color according to its status, two RJ-45 Ethernet ports, a power slot, and a Reset button. See the explanation below:

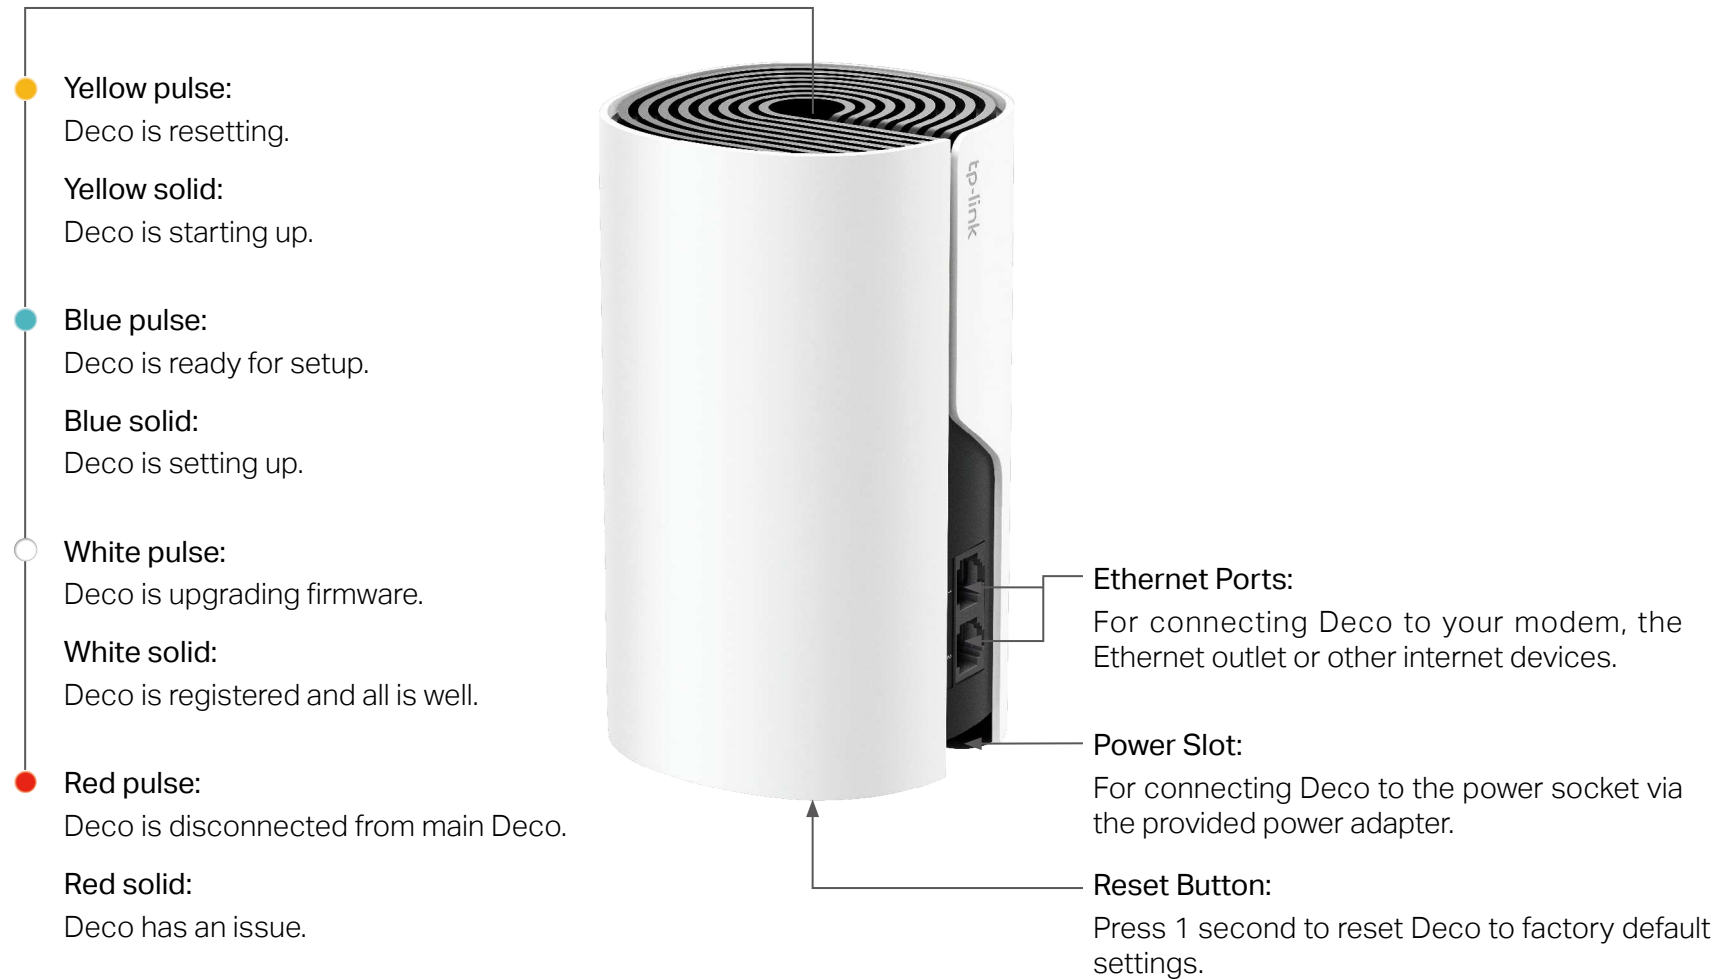

Set Up Your Deco

Follow the steps below to set up your Deco Whole Home Mesh Wi-Fi System.

1. Download and install the Deco app

Scan the QR code below or go to Google Play or the Apple App Store to download the Deco app.

Install the app on your Android or iOS smartphone or tablet.




or



2. Log in or sign up with TP-Link ID

Open the app. Use your TP-Link ID to log in.


If you don't have a TP-Link ID, tap Sign Up. The Deco app will guide you through the rest.

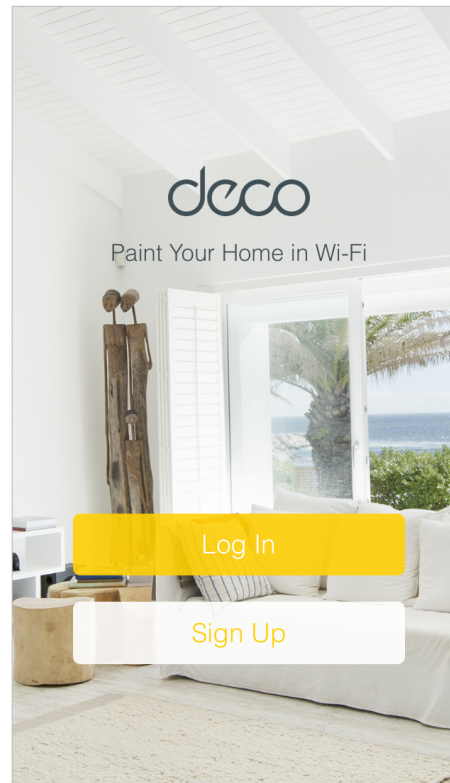

3. Connect Deco to your modem


Find and power off your modem. Connect your Deco to the modem and power them both on.

If you don't have a modem, connect the Ethernet outlet directly to your Deco.

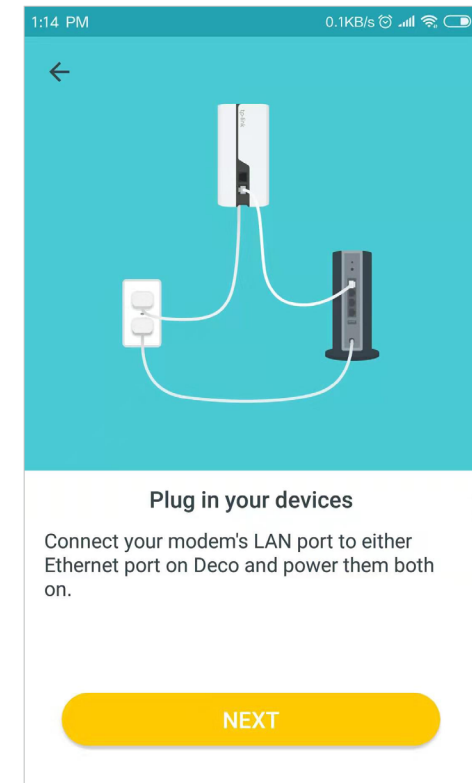

4. Select a location

Select a location for this Deco. If its location is not listed, you can create a new one by choosing Custom.

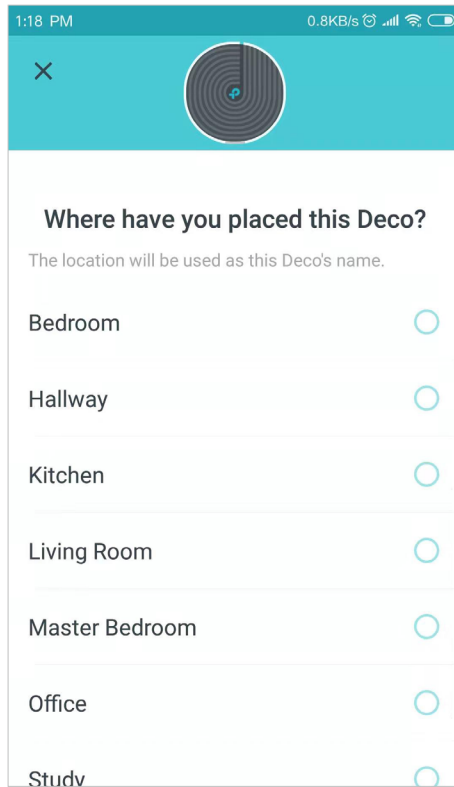

1:18 PM 0.8KB/s

✕

Where have you placed this Deco?

The location will be used as this Deco's name.

Bedroom ☐

Hallway ☐

Kitchen ☐

Living Room ☐


Master Bedroom ☐

Office ☐

Study ☐

5. Set up internet connection

Select the internet connection type and enter the information. If you are not sure, contact your internet service provider.

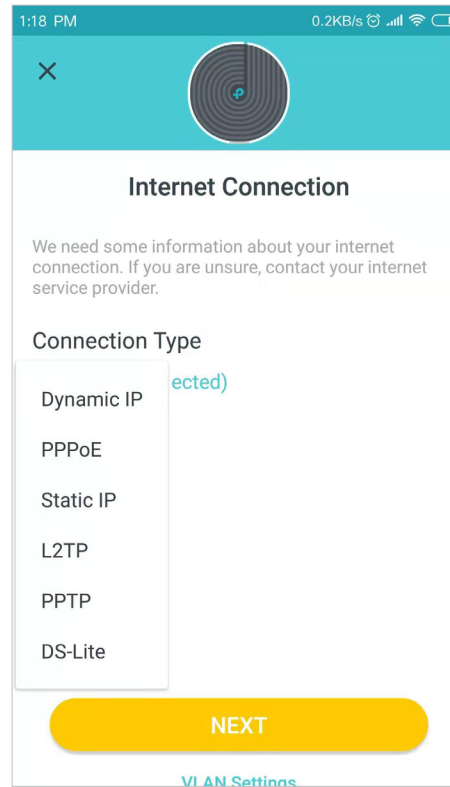

1:18 PM 0.2KB/s

✕

Internet Connection

We need some information about your internet connection. If you are unsure, contact your internet service provider.

Connection Type

Dynamic IP ☒ (selected)

PPPoE ☐

Static IP ☐

L2TP ☐

PPTP ☐


DS-Lite ☐

NEXT

[VLAN Settings](#)

6. Create your Wi-Fi network

Set a network name and a password. These will be the name and password you use to connect your devices to Wi-Fi.

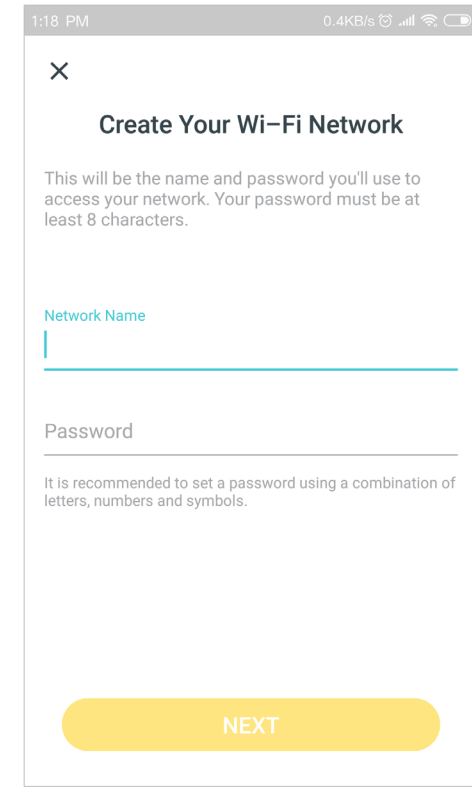

1:18 PM 0.4KB/s

✕

Create Your Wi-Fi Network

This will be the name and password you'll use to access your network. Your password must be at least 8 characters.

Network Name


Password

It is recommended to set a password using a combination of letters, numbers and symbols.

NEXT

7. Connect to your Wi-Fi network


Connect your devices to the Deco's Wi-Fi to continue the set up.

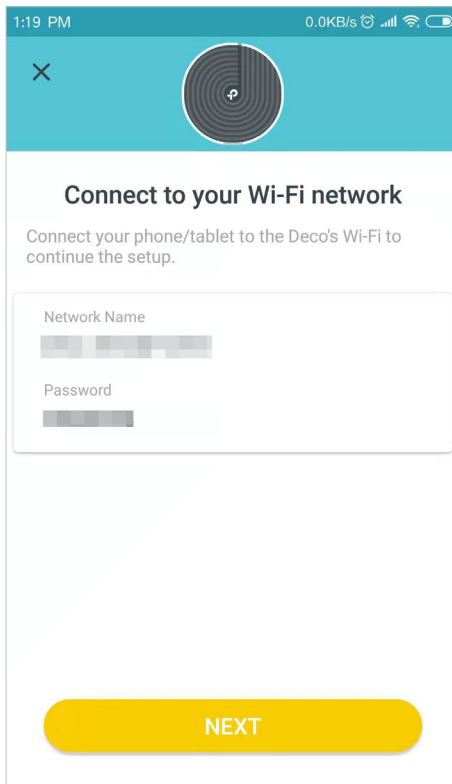

The screenshot shows the Deco mobile app interface. At the top, there's a status bar with the time 1:19 PM, data speed 0.0KB/s, and signal icons. Below the status bar is a blue header with a close button (X) and a Deco logo. The main content area has the title "Connect to your Wi-Fi network" and a subtitle "Connect your phone/tablet to the Deco's Wi-Fi to continue the setup." Below this is a form with two input fields: "Network Name" and "Password", both with masked text. At the bottom, there is a large yellow button labeled "NEXT".

8. Setup complete


Setup completed. Connect all devices to the Deco network for better connections.

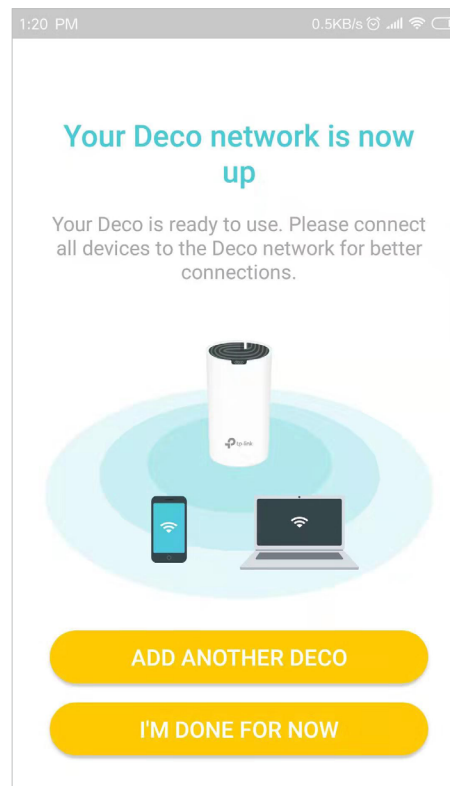

Dashboard





After you successfully set up your Deco network, you will see the dashboard of the Deco app. Here you can check the working status of all the Decos, manage the connected devices, add more decos, use friends of Deco, and more.

Tap  to view connected devices


Tap  to check all Deco status

Select a Deco to view the details


View connected devices details

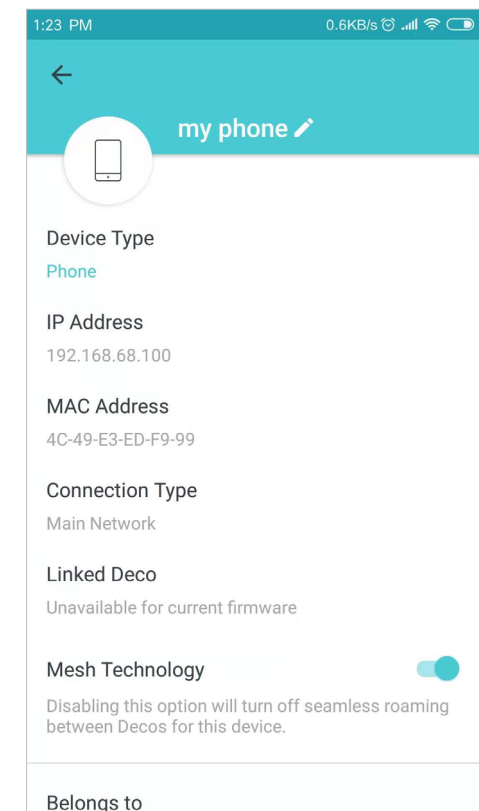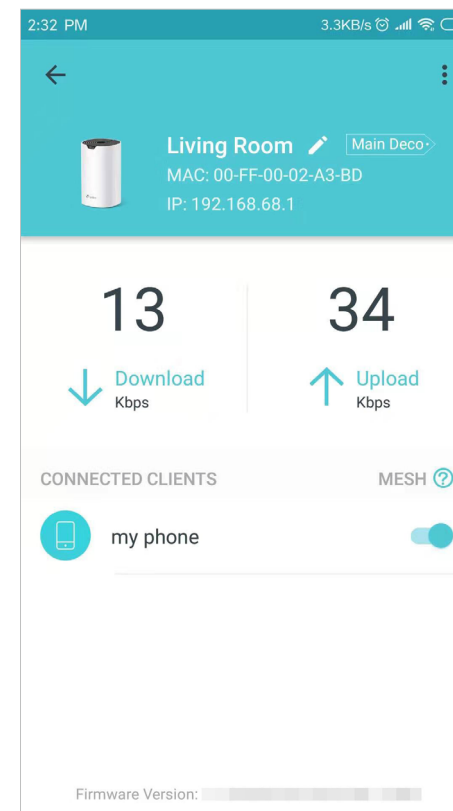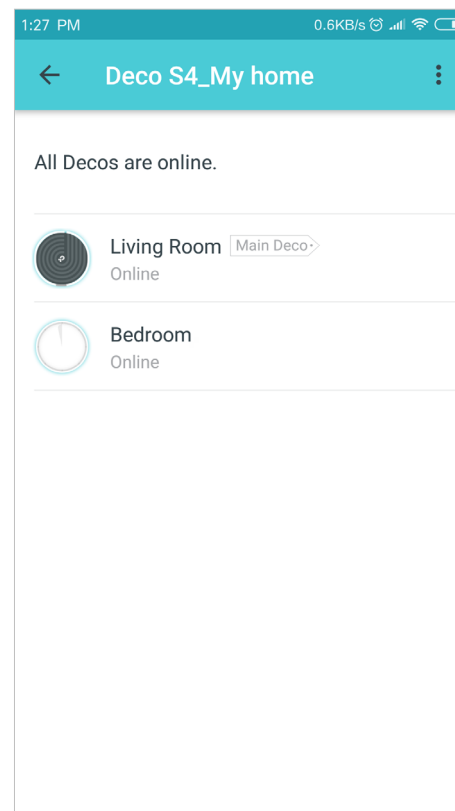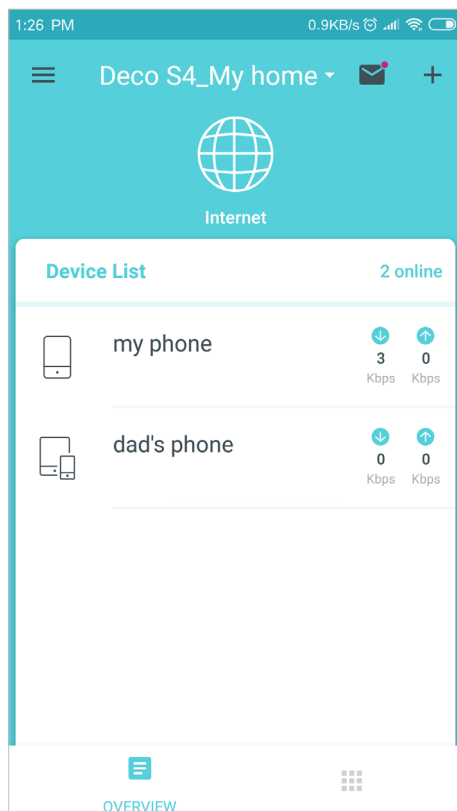


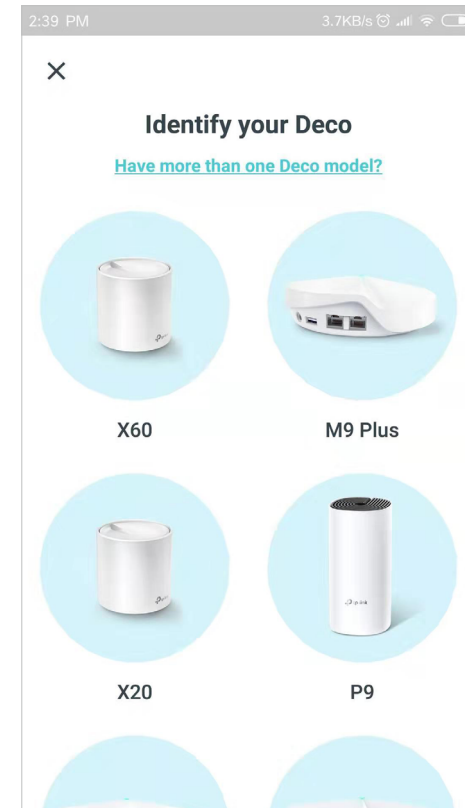
Tap  to set up more features

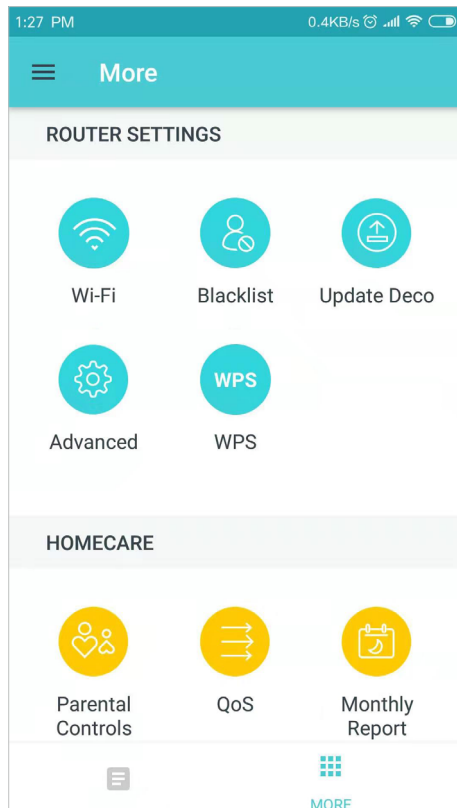

Swipe right to open the menu

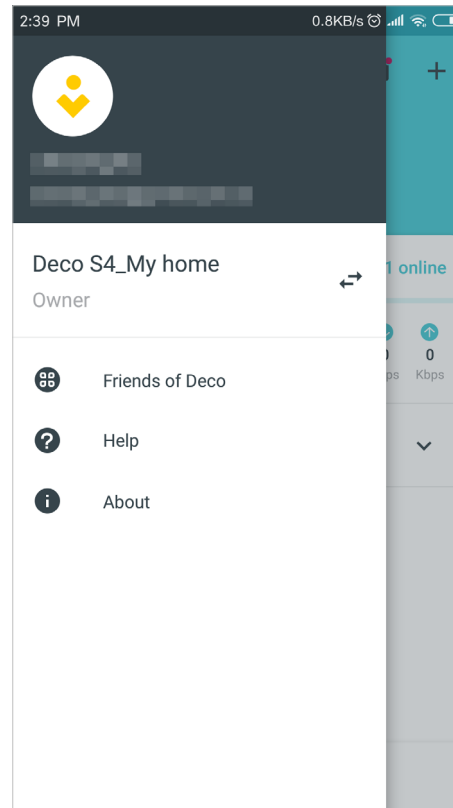


Tap  to add more devices




Wi-Fi Settings

You can change the network name and password of your main network, create a separate network for guests, and shake your device to share the network details easily with family and friends.


Tap  > Wi-Fi

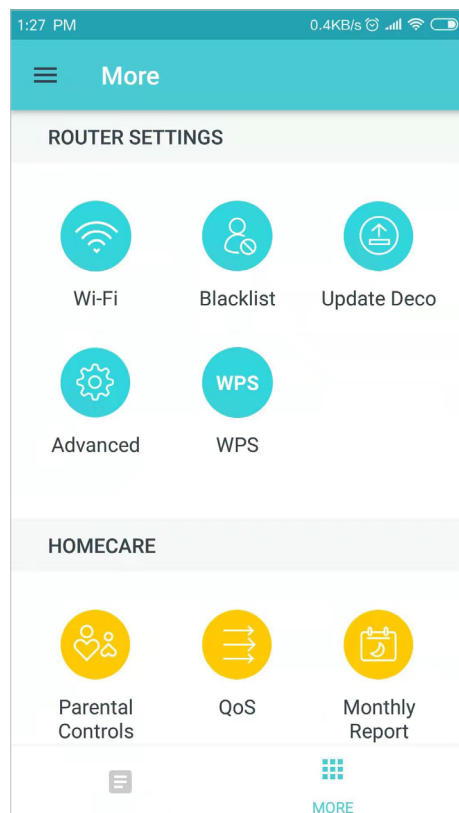


Manage main Wi-Fi network

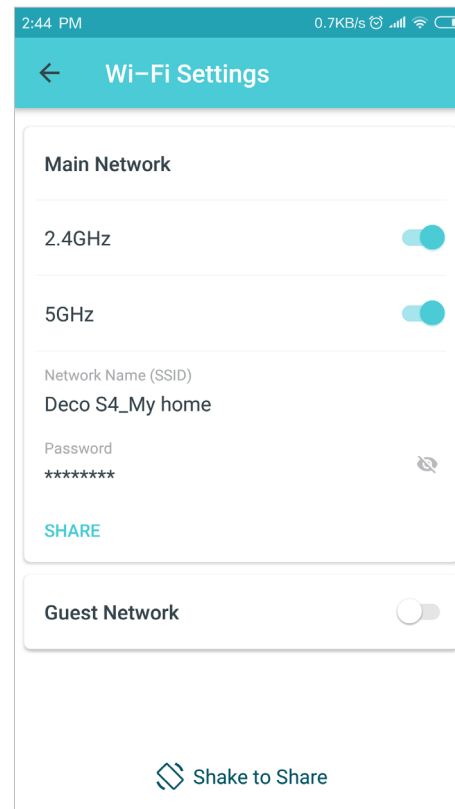

Enable guest network

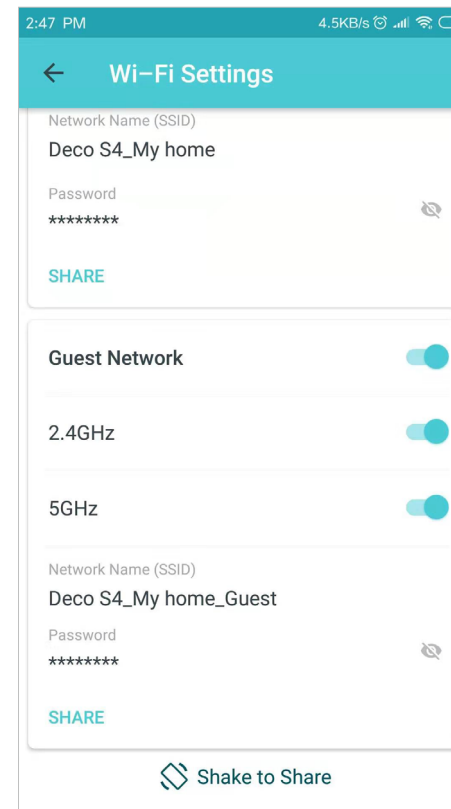


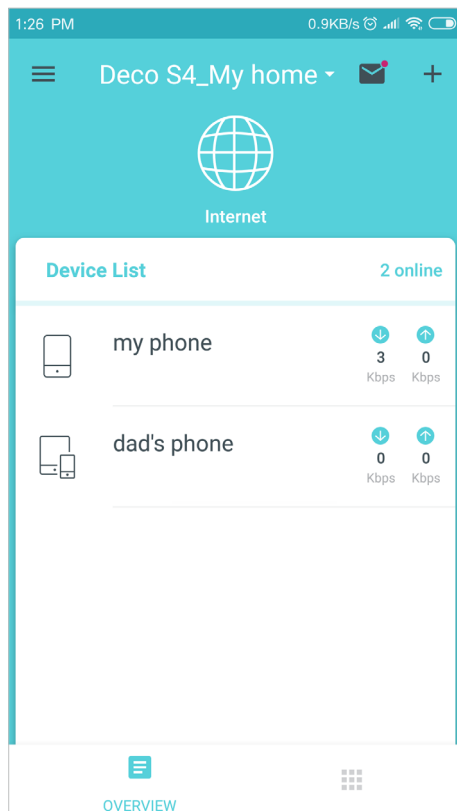
Shake to share Wi-Fi

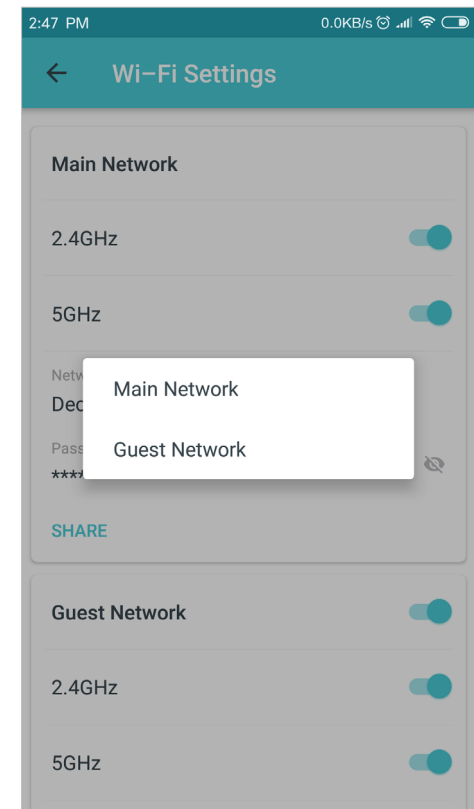


Blacklist

Compile a blacklist to avoid devices added on the blacklist to access to your network, ensuring the safety of your personal information shared in the network.


Tap  > Blacklist




Add clients to blacklist

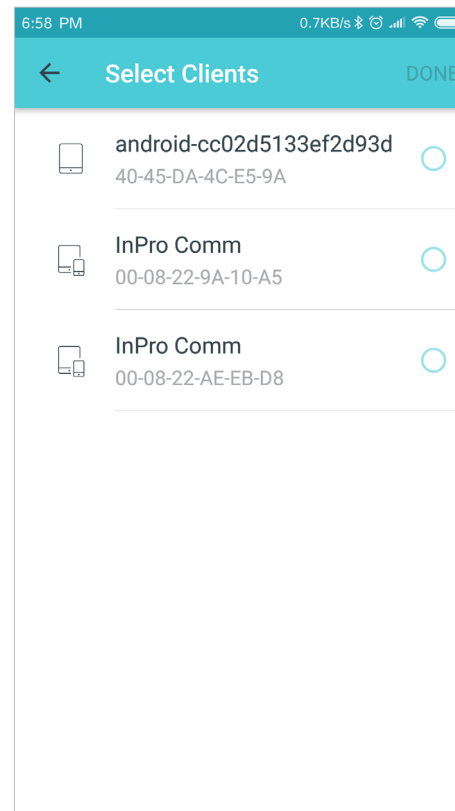

Add other devices to blacklist

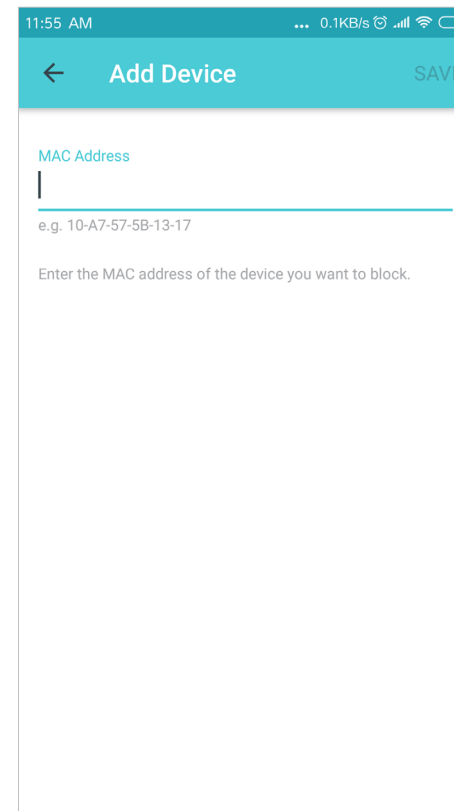


Manage blacklist

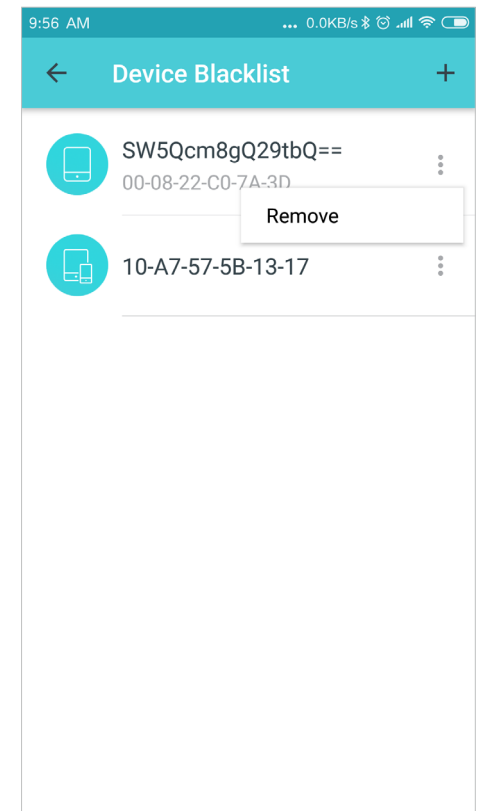


Online Update

TP-Link is dedicated to improving product features and providing a better customer experience. Update Deco when prompted in the Deco app.

Tap  > Update Deco

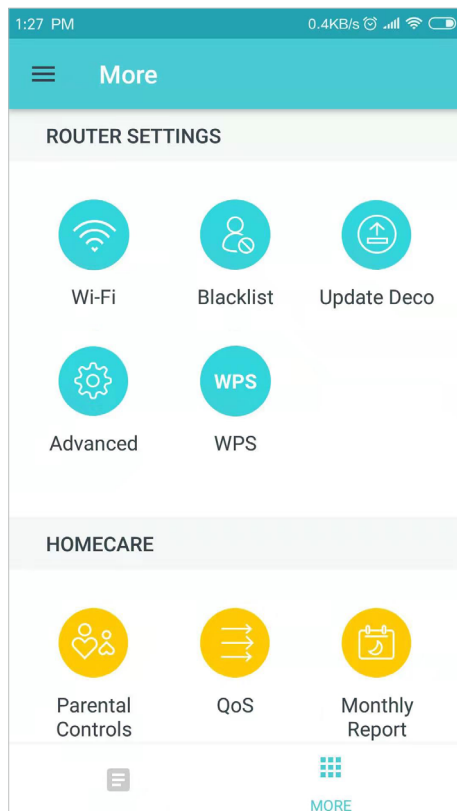


Deco is up-to-date

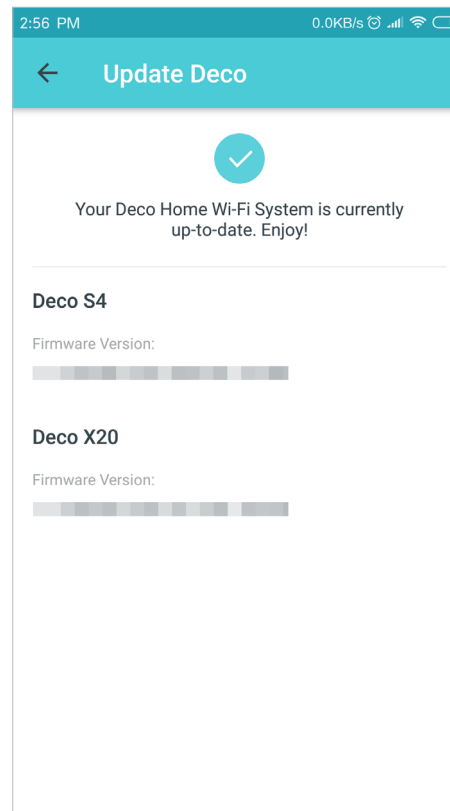


Advanced Features

Additional features are available under the Advanced menu. You can modify WAN settings (IPv4 & IPv6), add IPv6 firewall rules, modify LAN IP, set up DHCP server, enable VLAN/IPTV/MAC Clone mode, reserve the same IP address for a specific device, set up port forwarding rules to make your local computers accessible to other devices over the internet, enable TP-Link DDNS, SIP ALG, fast roaming and beamforming, control Deco's LED, change the working mode, and configure the notification settings.


Tap  > Advanced

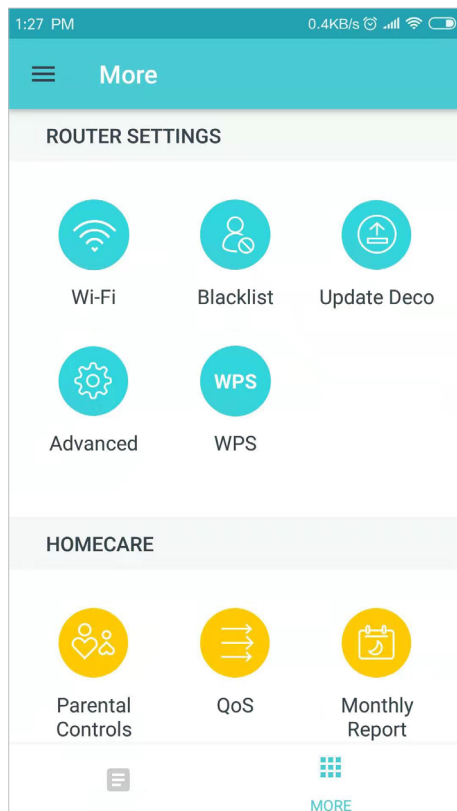


View IPv4 details

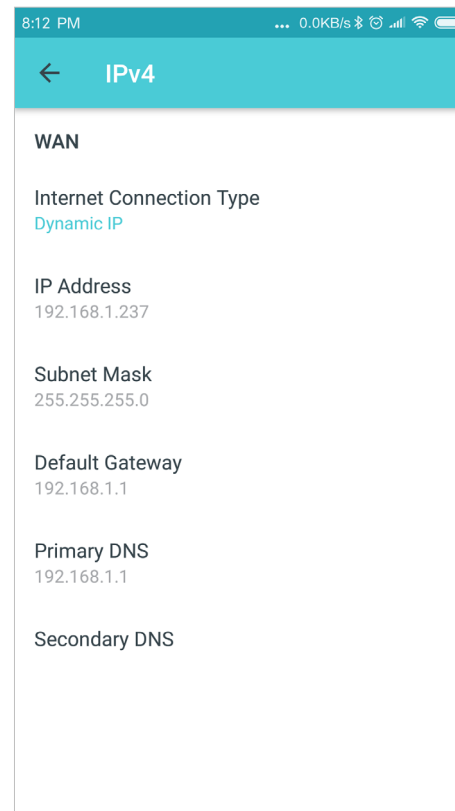

Enable IPv6

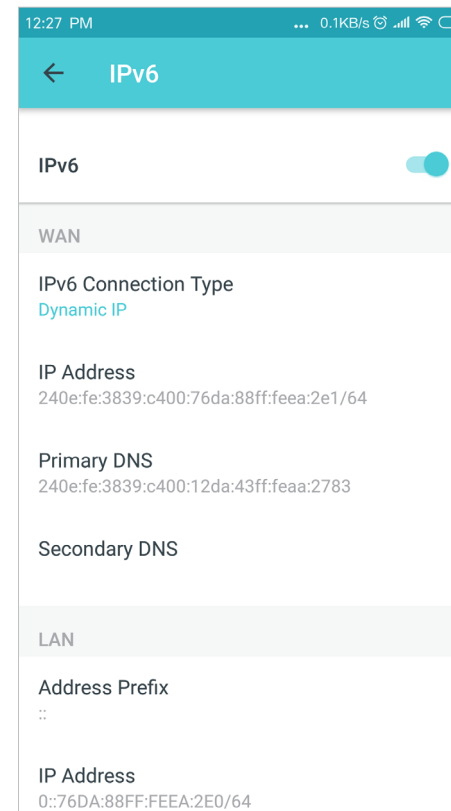

Add IPv6 firewall rules

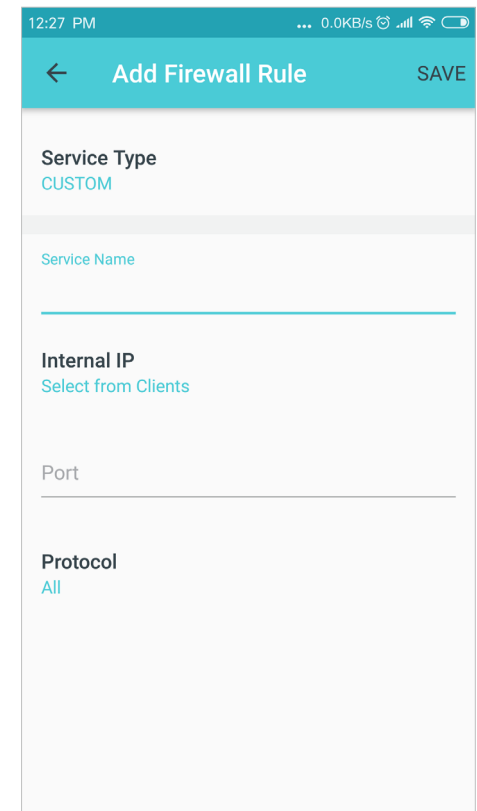

Modify LAN IP

12:39 PM ... 0.4KB/s

← LAN IP Save

LAN IP
192.168.68.1

Subnet Mask
255.255.252.0

Set DHCP server

12:30 PM ... 0.0KB/s

← DHCP Server Save

3 IP addresses assigned.

Start IP
192.168.68.50

End IP
192.168.71.250

Default Gateway
192.168.68.1

Primary DNS (Optional)

Secondary DNS (Optional)

Enable VLAN mode

12:30 PM ... 0.6KB/s

← VLAN SAVE

VLAN

VLAN Mode
Custom

Internet VLAN ID

Internet VLAN Priority

☒ 802.1Q Tag

Note: IPTV and VLAN features should use different VLAN IDs.

Enable IPTV mode

12:31 PM ... 0.0KB/s

← IPTV SAVE

IPTV

IPTV Mode
Singapore-Singtel

IPTV VLAN ID
20

IPTV VLAN Priority
4

Note: IPTV and VLAN features should use different VLAN IDs.

Enable MAC Clone

12:31 PM

0.4KB/s

←

MAC Clone

SAVE

MAC Clone

Use Client MAC Address

MAC Address

Select Client

Use Custom MAC Address

Tip: Make sure you select or enter the MAC address specified by your ISP.

Reserve IP addresses for specific devices

12:45 PM

0.0KB/s

←

Address Reservation

My phone

IP: 192.168.68.50

MAC: 4C-49-E3-ED-F9-99

Set up port forwarding rules

12:43 PM

0.0KB/s

←

Port Forwarding

DONE

Service Type

Custom

Service Name

External Port

Internal IP

Select from Device

Internal Port (Optional)

Protocol

All

Register a TP-Link DDNS domain name

3:04 PM

0.2KB/s

←

Register Domain Name

DONE

Domain Name

.tplinkdns.com

0 / 20


Your domain name should meet the following criteria:

· Start with a letter or number;


· Contain only letters, numbers and hyphens;

· Not exceed 20 characters in length.


Enable SIP ALG

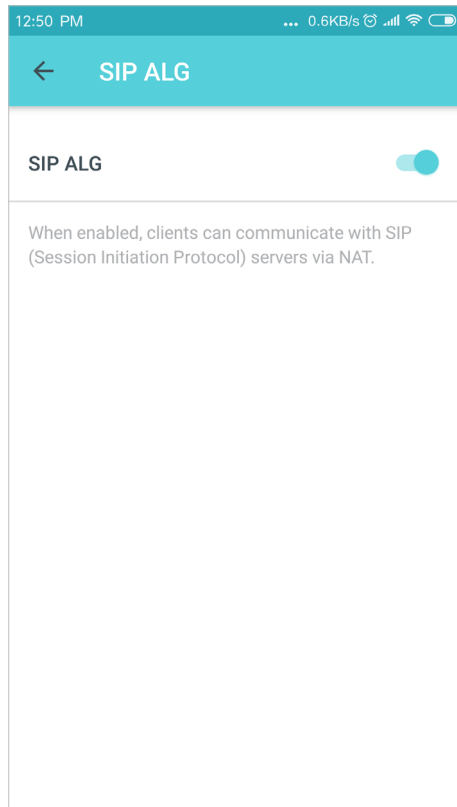


Enable Fast Roaming

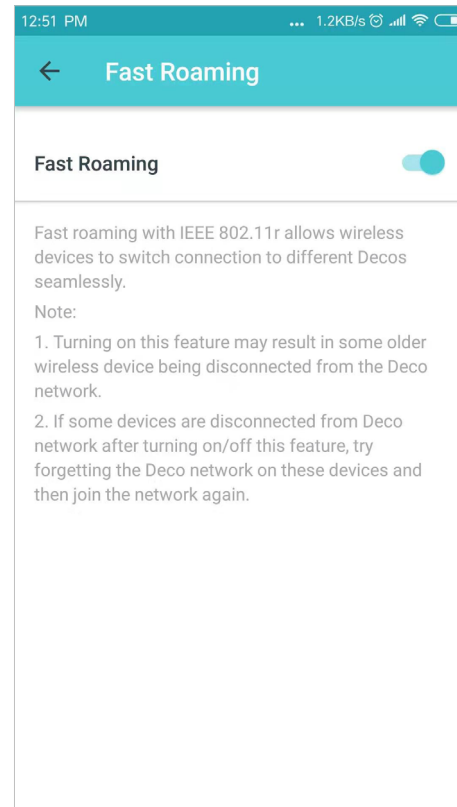


Enable Beamforming

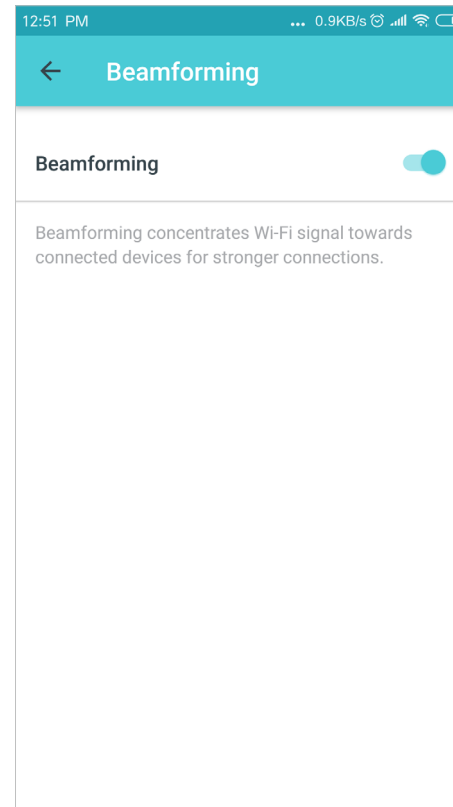


Enable LED controls

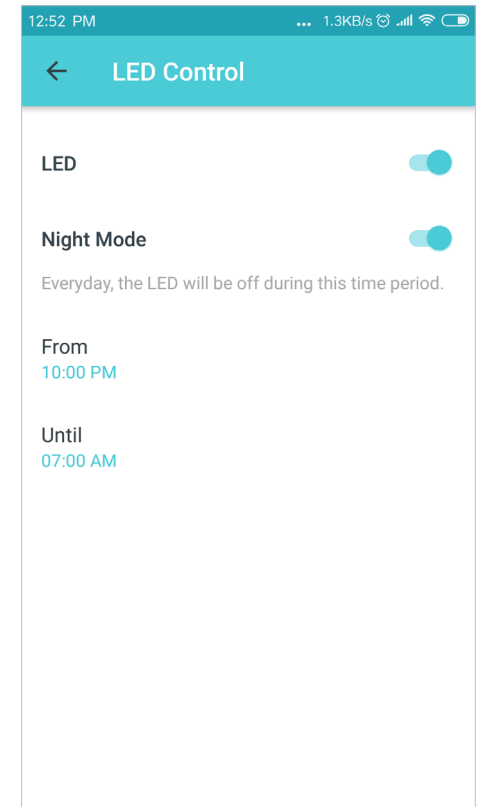

Change the operating mode

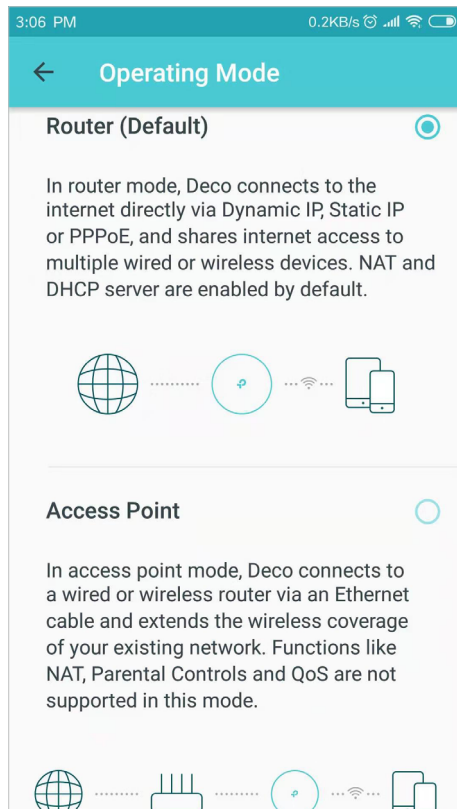


Set notifications

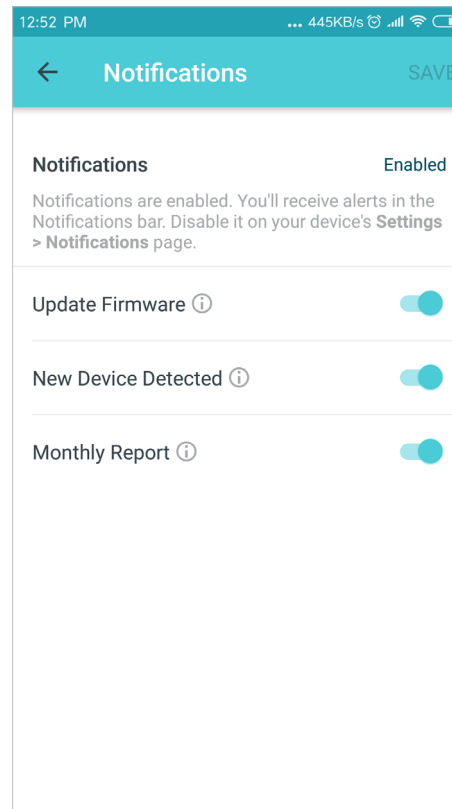


WPS

Easily connect a client to the network by turning on WPS for a nearby Deco and then for the client.


Tap  > WPS

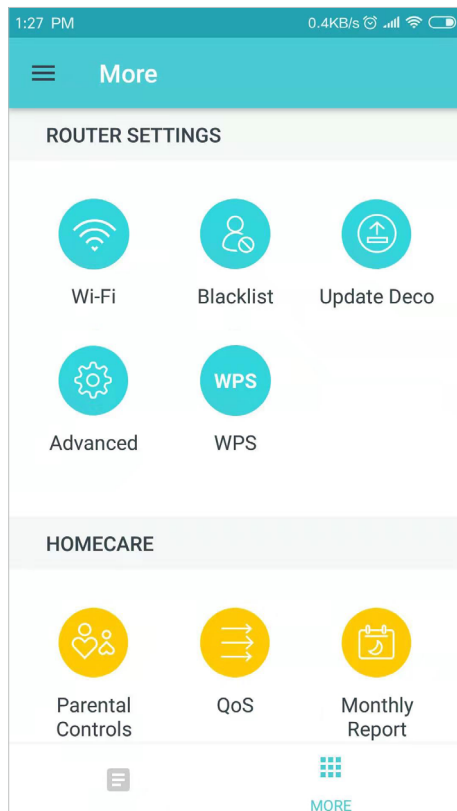

Tap the WPS icon on Deco app and then on the client

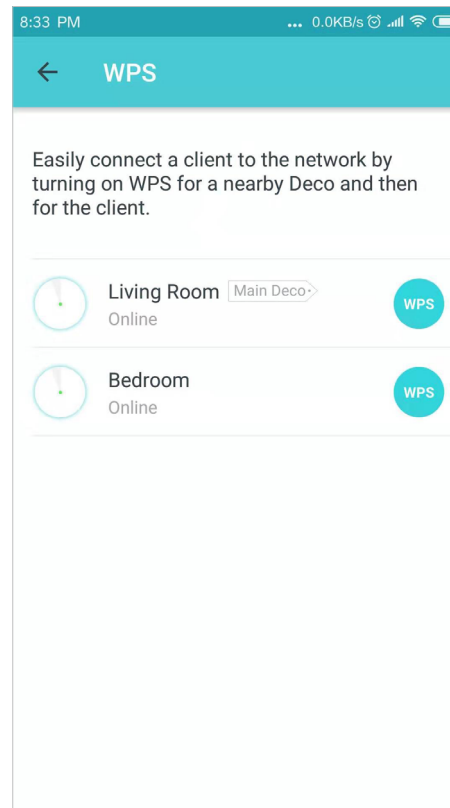


Successfully connected to the network

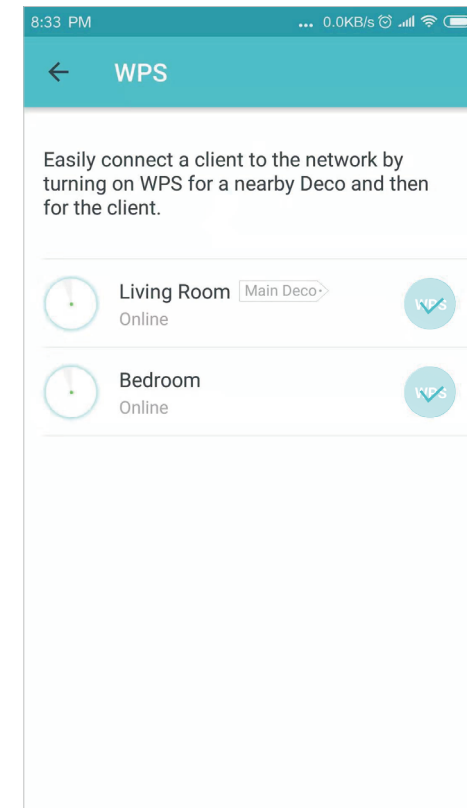


Parental Controls

Create profiles for family members and specify the devices that belong to them. Set individualized parental controls including when and for how long each person can access the internet. Block inappropriate content and pause the internet if necessary.


Tap  > Parental Controls

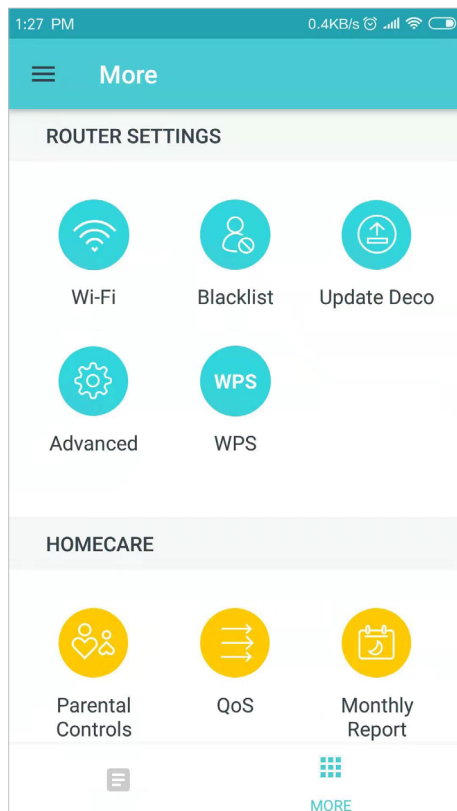


Add new profile

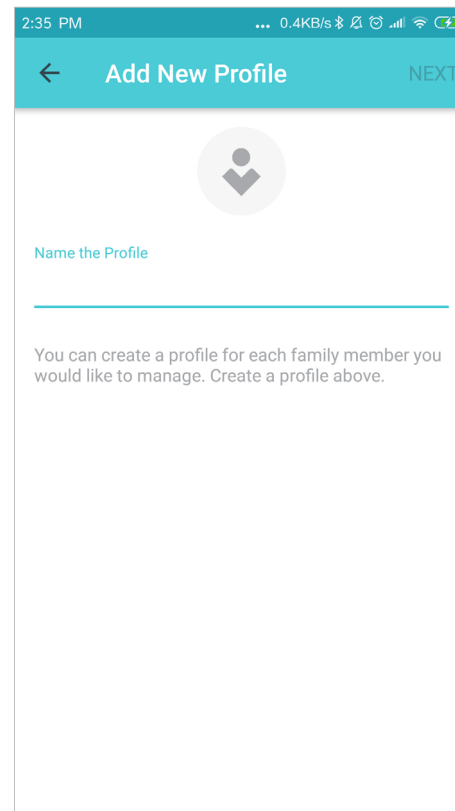

Set filter level

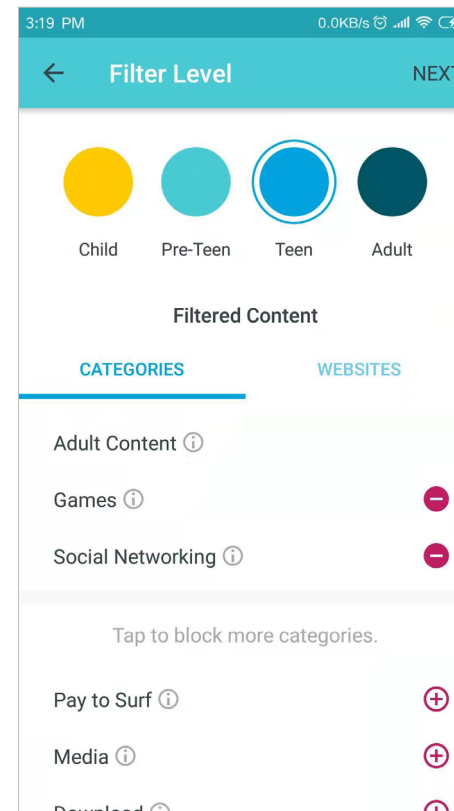


Set time controls

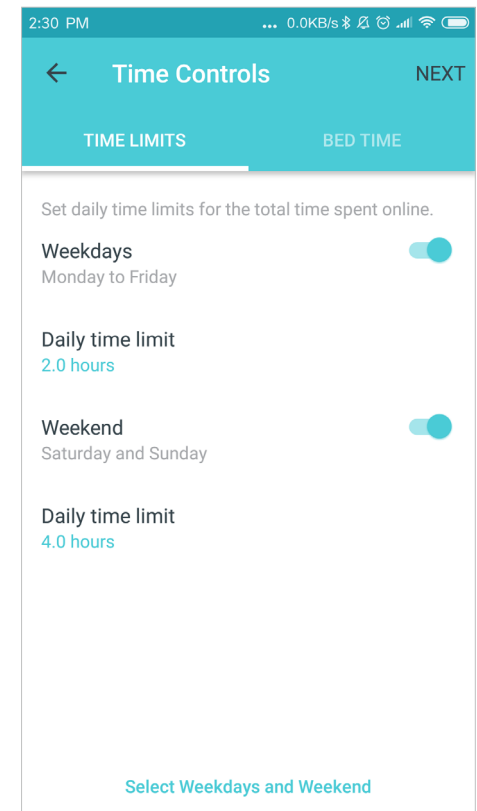


QoS

Prioritize the connection of a particular device for a set duration, such as a family member's laptop for one hour during a video call.


Tap  > QoS

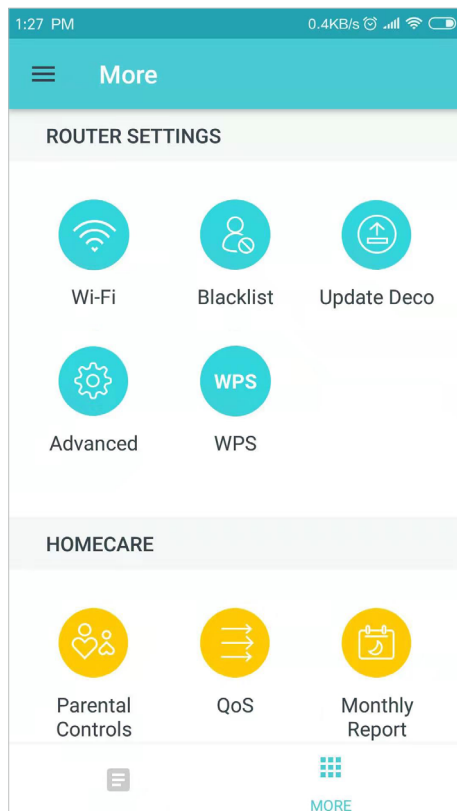

Set bandwidth

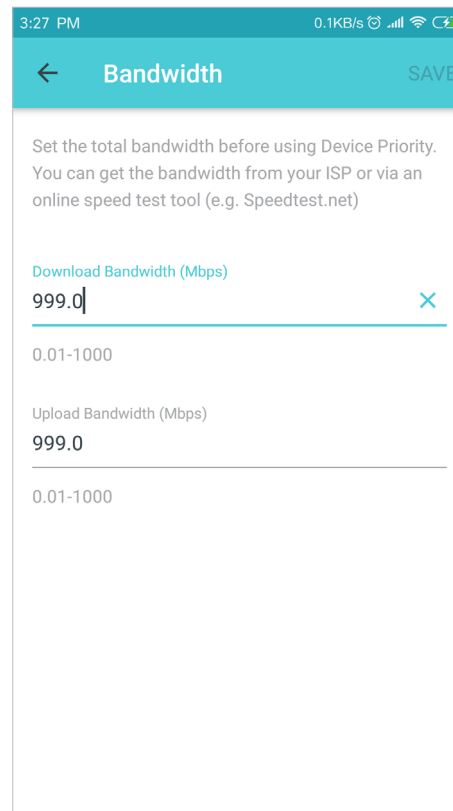


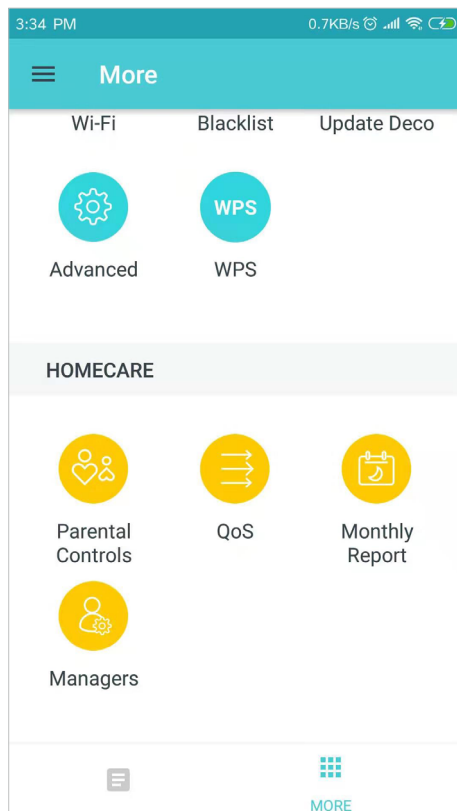
Prioritize devices

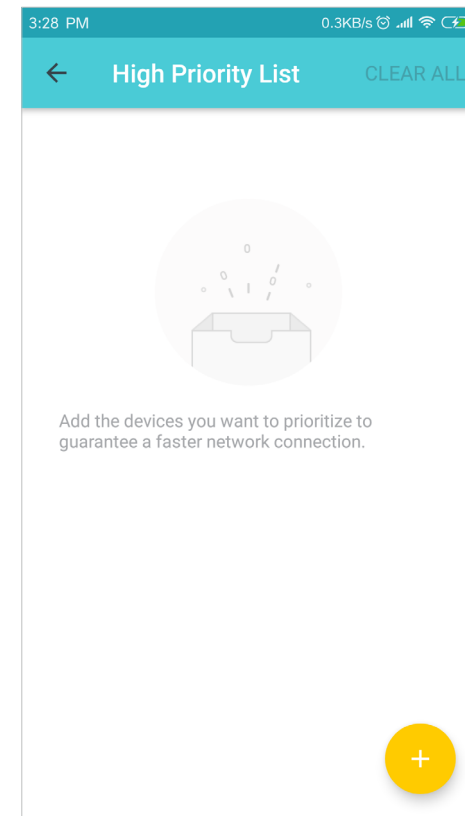


Monthly Report

Review the monthly usage statistics, such as security threats and total connected network devices each day.


Tap  > Monthly Report




View monthly reports

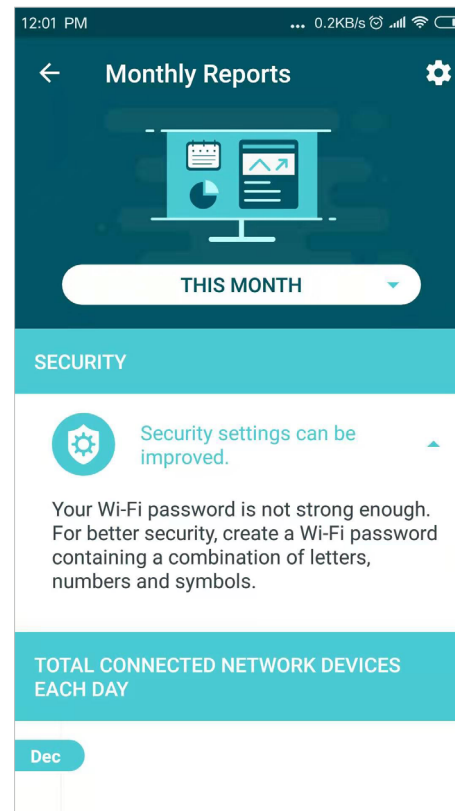

Enable or disable monthly report

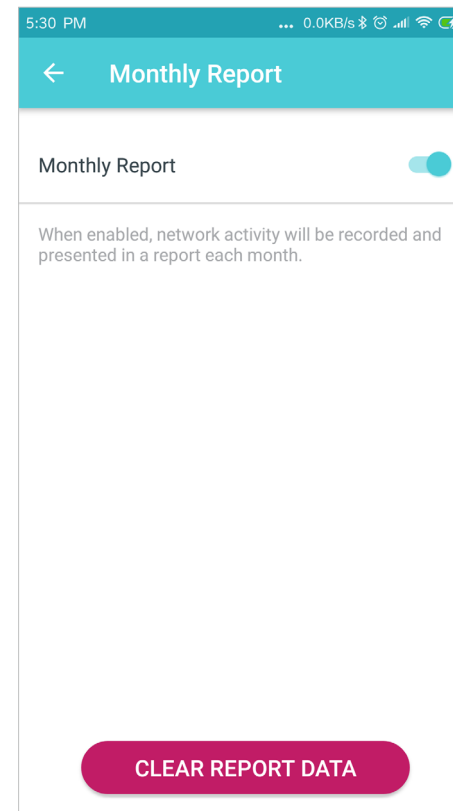


Clear monthly report data

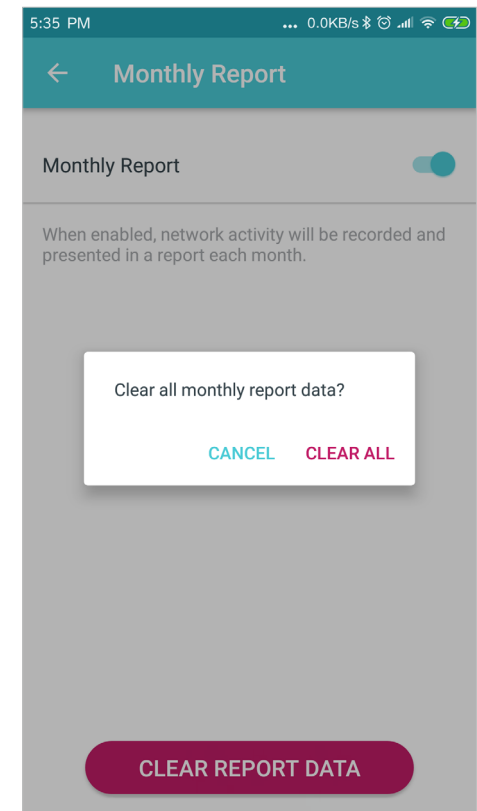


Managers

Add friends and family members to help manage your network. Each manager should have their own TP-Link ID.


Tap  > Managers

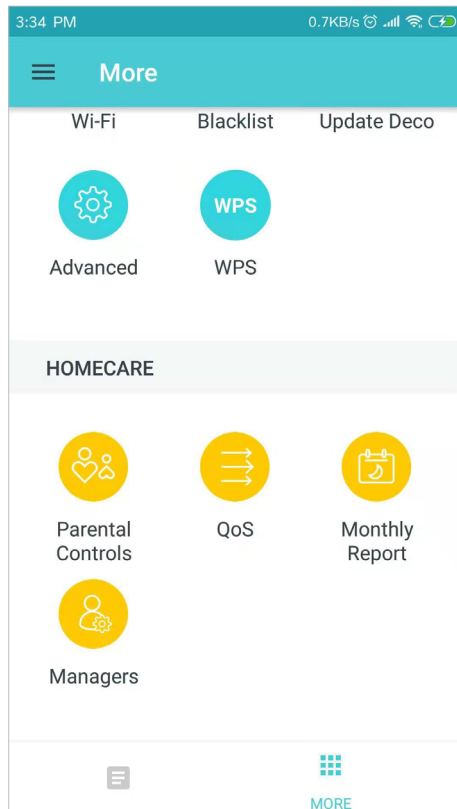


Add as manager

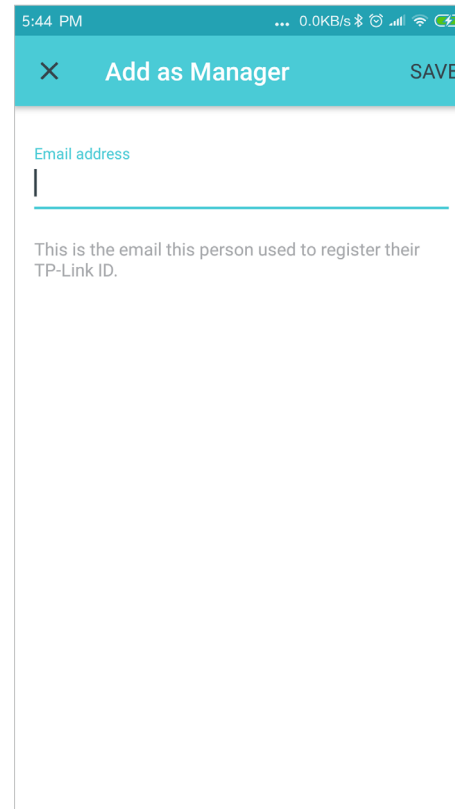

Set privileges for managers

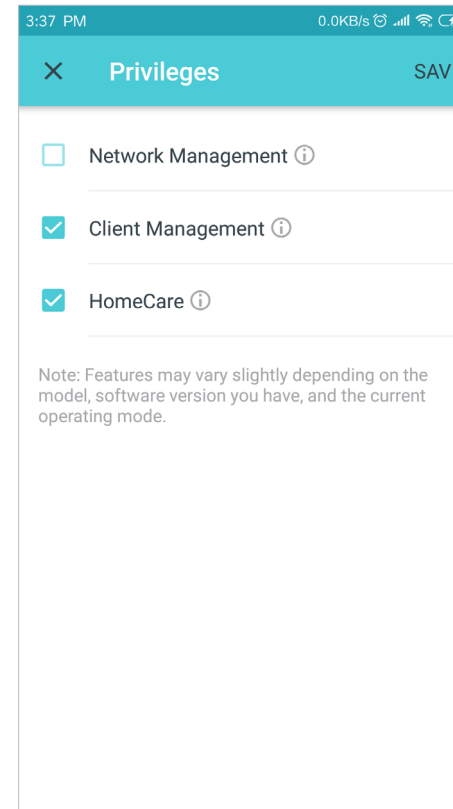


Manage manager list

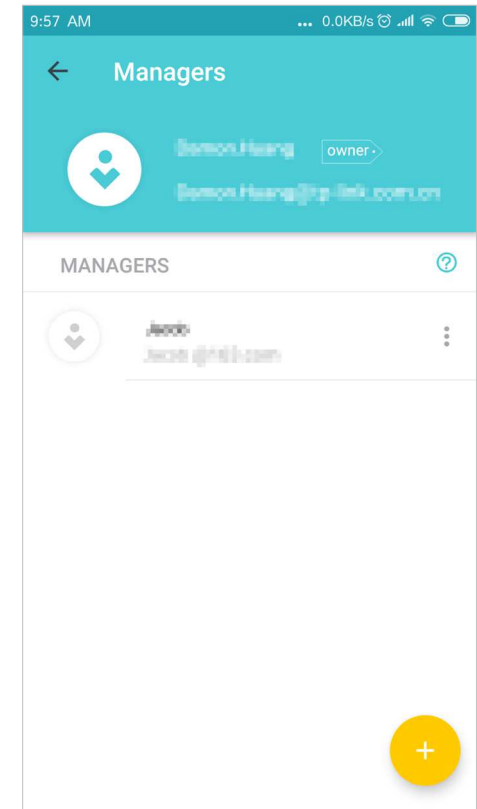

Authentication

COPYRIGHT & TRADEMARKS

Specifications are subject to change without notice.  **tp-link** is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders.

No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-Link Technologies Co., Ltd. Copyright © 2020 TP-Link Technologies Co., Ltd. All rights reserved.

FCC Compliance Information Statement



Product Name: AC1200 Whole Home Mesh Wi-Fi System

Model Number: Deco S4

Component Name	Model
I.T.E POWER SUPPLY	T120150-2B1

Responsible party:

TP-Link USA Corporation, d/b/a TP-Link North America, Inc.

Address: 145 South State College Blvd. Suite 400, Brea, CA 92821

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6803

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

We, TP-Link USA Corporation, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2019.12.1

FCC Compliance Information Statement



Product Name: I.T.E POWER SUPPLY

Model Number:

T120150-2B1

Responsible party:

TP-Link USA Corporation, d/b/a TP-Link North America, Inc.

Address: 145 South State College Blvd. Suite 400, Brea, CA 92821

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6803

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We, **TP-Link USA Corporation**, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2019-12-31

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

OPERATING FREQUENCY(the maximum transmitted power)

2412MHz—2483.5MHz (20dBm)

5150MHz—5250MHz (23dBm)

EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863. The original EU declaration of conformity may be found at <https://www.tp-link.com/en/ce>

RF Exposure Information

This device meets the EU requirements (2014/53/EU Article 3.1a) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

Attention: This device may only be used indoors in all EU member states and EFTA countries.

	AT	BE	BG	CH	CY	CZ	DE	DK
	EE	EL	ES	FI	FR	HR	HU	IE
	IS	IT	LI	LT	LU	LV	MT	NL
	NO	PL	PT	RO	SE	SI	SK	UK

Canadian Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. l'appareil ne doit pas produire de brouillage;
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution:

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

Avertissement:

Le dispositif fonctionnant dans la bande 5150-5250 MHz est réservé uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)

Korea Warning Statements:

당해 무선설비는 운용중 전파혼신 가능성이 있음.

NCC Notice & BSMI Notice:

注意！

依據 低功率電波輻射性電機管理辦法

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性或功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通行；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信規定作業之無線電信。低功率射頻電機需忍受合法通信或工業、科學以及醫療用電波輻射性電機設備之干擾。

4.7.9.1應避免影響附近雷達系統之操作。

4.7.9.2高增益指向性天線只得應用於固定式點對點系統。

安全諮詢及注意事項

- 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先拔掉電源線。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 請不要私自打開機殼，不要嘗試自行維修本產品，請由授權的專業人士進行此項工作。

限用物質含有情況標示聲明書

產品元件名稱	限用物質及其化學符號					
	鉛	鎘	汞	六價鉻	多溴聯苯	多溴二苯醚
	Pb	Cd	Hg	CrVI	PBB	PBDE
PCB	○	○	○	○	○	○
外殼	○	○	○	○	○	○
電源供應器	-	○	○	○	○	○
備考1. 超出0.1 wt %”及“超出0.01 wt %”系指限用物質之百分比含量超出百分比含量基準值。						
備考2. “○”系指該項限用物質之百分比含量未超出百分比含量基準值。						
備考3. “-”系指該項限用物質為排除項目。						



Продукт сертифіковано згідно з правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.



- Use only power supplies which are provided by manufacturer and in the original packing of this product. If you have any questions, please don't hesitate to contact us.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

Explanation of the symbols on the product label

Symbol	Explanation
	DC voltage
	Indoor use only
	RECYCLING This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.