




## Professional Hair Clipper

K11S

### Operation Manual

English

#### Components



#### Parameters

Professional Hair Clipper	Motor	Operating voltage 20V~110V High performance motor
	Battery	2000mAh Li-ion battery Charging time about 1.5 hours Working time with full charge about 1.5 hours
Applicable Adapter Type	Input	100-240V~50/60Hz
	Output	5V~1000mA Output current exceed 5.2A otherwise the device will burn out, resulting in a permanent and in its operation life.

1

English

#### Precautions For Use



**DO NOT** disassemble the product by yourself.  
**DO NOT** wash the hair clippers; keep them away from wet areas.




The product should only be cleaned with a lightly dampened micro cloth or a mild soap solution.  
**DO NOT** charge the product with temperature ranges of above 40°C or below 0°C. Otherwise the battery's capacity will be reduced and its lifespan will be shorten.  
Output **CANNOT** exceed 5.5V, otherwise the device will burn out, resulting in a permanent and in its operational life.

- The product will become warm during usage and charging, this is normal.
- Please remove the battery safety, and follow of proper products in your area of battery disposal, when the battery is service life ends.

2

English

#### Instruction



#### LED Display



Power Indicator Percentage



- If there is a lack of oil, the red light on the left side of the clipper turns on and there is an audible reminder at the same time.
- If the battery is below 5%, the red light on the right will flash.

3

English

#### Fixed-Length Function

A: Use of guide Combs. Drop and turn the hair Options (3.5, 6, 12, 15, 18mm) six length adjustment options, they help to control the length of the hair that is cut.

- To determine the length of the haircut.
- To select the appropriate guide Combs for styling and trimming.



#### To adjust the clippers

These clippers are equipped with an adjustable taper lever that changes the closeness of the hair trimming. When the lever is in the uppermost position, the blades will produce the closest trimming. Pushing the lever downward gradually will increase the cutting length, as a result less hair will be cut.



#### Install the guide Combs

- Align the guide Combs with the blade edge.
- Slightly pressed down on it until there is a "Snap" in order to mount it.

#### Disassemble the guide Combs


Put the guide combs firmly at its base (not along the teeth) until it disconnects from the clippers.



4

English

#### Use the Rechargeable Mode

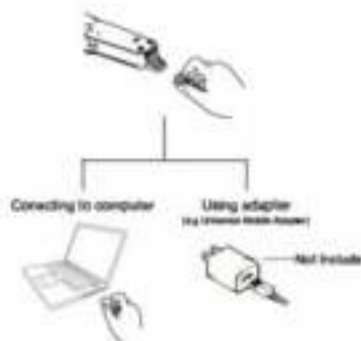

#### How To Recharge

- Insert the charger into the rear part of clippers, connect to a power supply to begin charging.
- When the charging indicator light comes on, charging has commenced; when the red light changes to blue, it indicates the product has been fully charged. Cord and console options are available.

5

English

#### Assembly & Disassembly Of The Clippers

The blades must be re-align if they have been removed for cleaning or replacement.

As shown in the image to the right the bottom blade holes are wider than the slots of the blade screws. After the screw of the bottom blade is loosened, adjust the distance of lower blade, and align it with the upper blade, then tighten it.



- The end of the upper blade teeth should be 0.5mm away from the lower blade when the lever is in the uppermost position.

This must be done so that the clippers will not cut too closely or allow any moving parts to come in contact with the skin.

- The left most tooth of the upper blade must be covering or in the left position of the first small tooth of the bottom blade.
- The right most tooth of the top blade must be touching the large tooth on the bottom blade.

#### Maintenance of Clippers



- The clippers have been carefully tested to ensure they are cited and aligned properly before leaving the factory.
- To keep the clippers performing at the highest capacity they must be oiled after several uses. To oil it properly, the unit should be held so the blades are in a downward position. With the clipper blade running, dispense 2-3 drops of oil across the top blade.

6

For more information, contact us at:

Info@goodsexperiences.com  
www.goodsexperiences.nl

#### Manufacturer:

Koenyee | Good Experience

Houghout 55

4817EC Breuk

The Netherlands

CE RoHS

Made in China