



触摸真立体蓝牙耳机

M48 全新蓝牙5.3




使用前请仔细阅读本手册

包装信息




充电仓
无线耳机
中号、小号耳帽各一对
USB充电线

产品信息

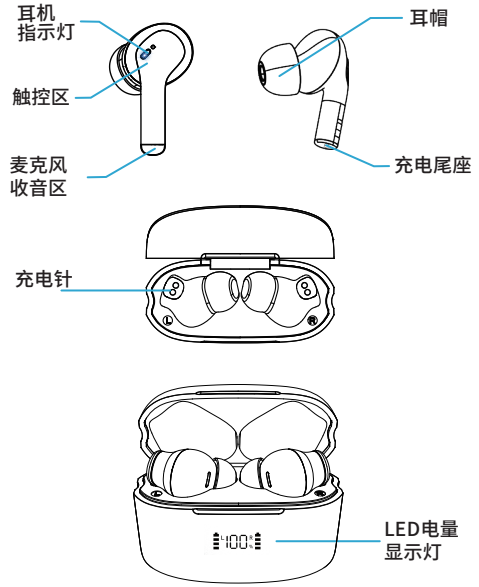

耳机指示灯
耳帽
触控区
充电尾座
麦克风收音区
充电针
LED电量显示灯

双耳模式




第一步
将两只耳机从包装盒拿出

第二步
将两只耳机都放置在充电仓内,使用数据线给充电仓充电30分钟,然后再进行第三步

第三步
将充电仓盖子打开,等待3-5秒后两耳机指示灯缓慢的闪烁(如果双耳红蓝灯闪烁,请单击右耳6下,等待配对)两耳机配对成功

第四步
手机蓝牙搜索并选择“M48-ANC”确认配对

单耳模式




第一步
将任意一个耳机从充电仓中取出

第二步
手机蓝牙搜索并选择“M48-ANC”确认连接

备注:如果手机已经连接对其成功,任意拿单耳耳机出充电仓,也会自动连接手机。

控制功能

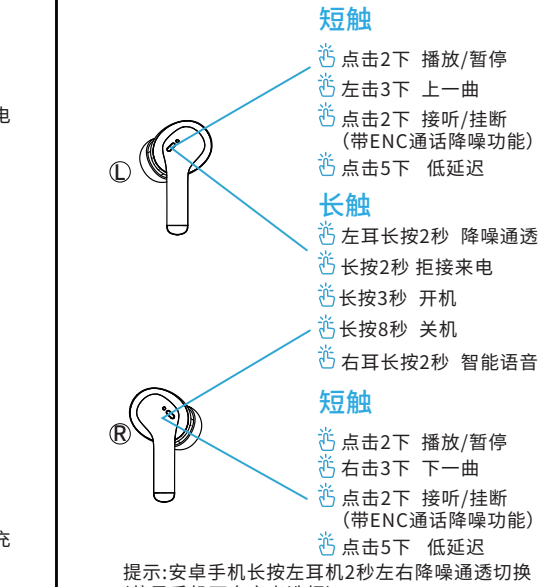

短触
 单击2下 播放/暂停
 左击3下 上一曲
 单击2下 接听/挂断 (带ENC通话降噪功能)
 单击5下 低延迟


长按
 左耳长按2秒 降噪通透切换
 长按2秒 拒接来电
 长按3秒 开机
 长按8秒 关机
 右耳长按2秒 智能语音

短触
 单击2下 播放/暂停
 右击3下 下一曲
 单击2下 接听/挂断 (带ENC通话降噪功能)
 单击5下 低延迟

提示:安卓手机长按左耳机2秒左右降噪通透切换(苹果手机可自定义选择)

充电

请使用原装充电线。禁止使用快充充电。

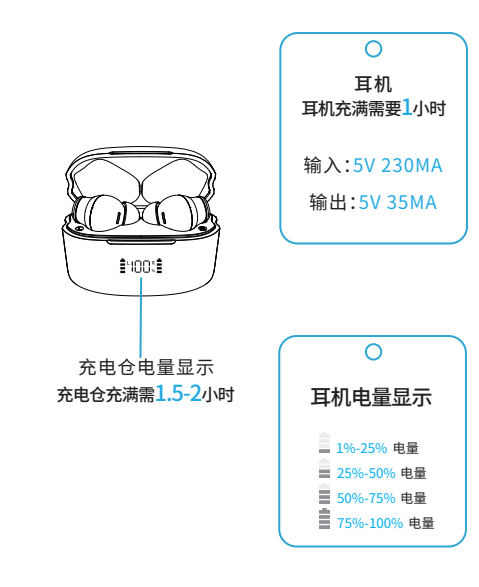

耳机
耳机充满需要1小时
输入:5V 230MA
输出:5V 35MA

充电仓电量显示
充电仓充满需1.5-2小时

耳机电量显示
 1%-25% 电量
 25%-50% 电量
 50%-75% 电量
 75%-100% 电量

故障处理

如果出现以下任何一种情况,请按照说明逐一解决。

1.左右耳机无法配对成功
 状况:从充电仓中取出耳机,两个耳机的蓝灯一直快闪或者手机上两个蓝牙名称M48-ANC。
 解决:关闭两只耳机,删除手机或其他蓝牙设备连接列表中显示的连接记录M48-ANC。然后快速点击右耳机6下,2-3秒后,两个耳机都会慢闪蓝灯,表示配对成功。

2.只有一个耳机可以工作
 状况:连接手机时,只有一只耳塞在工作,另一只耳机蓝灯快闪,或者不闪灯。
 解决:关闭两只耳机,删除手机或其他蓝牙设备连接列表中显示的连接记录M48-ANC。然后快速点击右耳机6下,2-3秒后,两个耳塞都会慢闪蓝灯,表示配对成功。

3.耳机无法连接手机
 解决方案:
 1)同时关闭两边耳机和手机蓝牙,再同时重新打开,重新搜索蓝牙名称M48-ANC进行连接。
 2)如果耳机之前已经被手机连接过,那么只需要在蓝牙列表中找到蓝牙名称,连接即可。
 3)删除手机蓝牙列表记录,搜索M48-ANC连接。


故障处理

4. 耳机充电仓不显示耳机充电指示进度条。
 解决方案:
 1)耳机充满电后,充电指示灯进度条会自动熄灭。【将两个耳机从充电仓中取出,检查它们是否可以自动开机。如果不能,请尝试步骤2。】
 2)充电尾座或充电针脏了会造成接触不良。【用酒精和棉签清洁耳机充电尾座和充电针3-5次,然后再再次充电30-60分钟后使用。】
 3)充电仓或耳机已完全放电。【给耳机和充电仓同时充电20分钟,耳机蓝灯慢闪。如果不是这样,请直接联系我们。】

规格


耳机:
 蓝牙版本:杰里5.3
 蓝牙距离:10米
 电池容量:35毫安
 充电时间:1小时
 使用时间:4-5小时
 耳机重量:8g

充电仓:
 电池容量:230毫安
 充电时间:2小时
 输入:5V 230MA
 输出:5V 35MA
 尺寸:60*48*27mm
 充电仓重量:34g

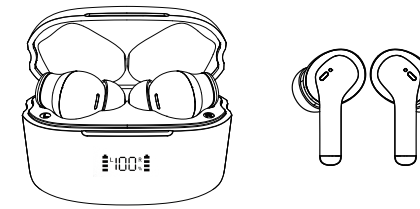


TOUCH CONTROL EARBUDS

M48 BT5.3




Please read this manual carefully before using

Accessories

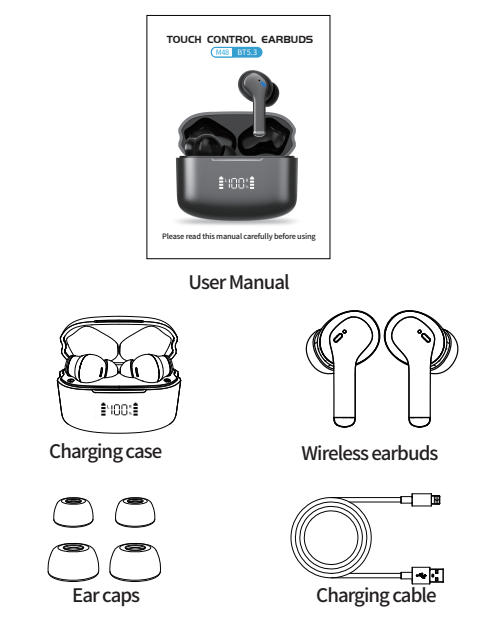


充电仓
无线耳机
Ear caps
充电线

Product Details

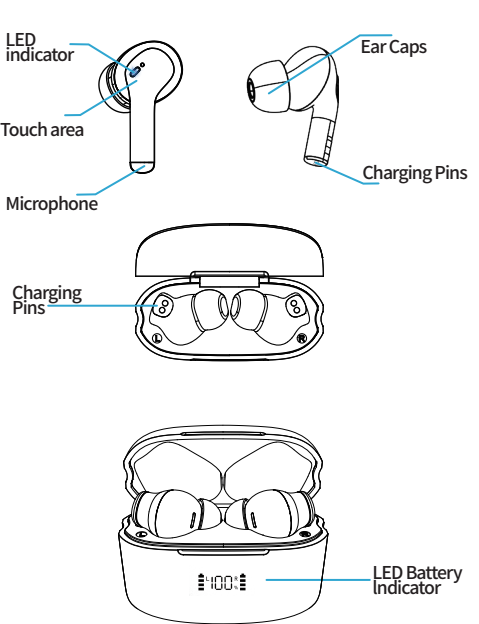

LED indicator
Ear Caps
Touch area
Charging Pins
Microphone

Twin Mode

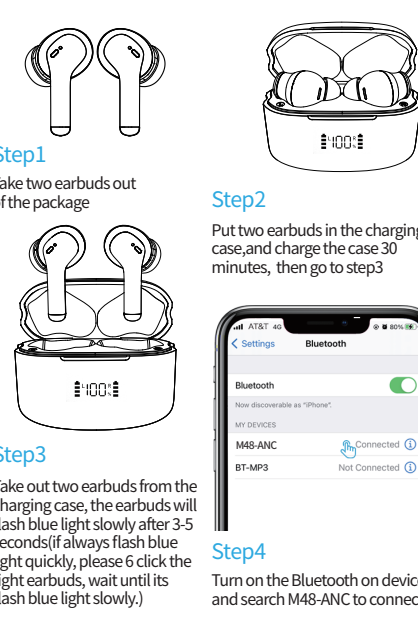


Step1
Take two earbuds out of the package

Step2
Put two earbuds in the charging case, and charge the case 30 minutes, then go to step3

Step3
Take out two earbuds from the charging case, the earbuds will flash blue light slowly after 3-5 seconds (if always flash blue light quickly, please click the right earbuds, wait until its flash blue light slowly.)

Step4
Turn on the Bluetooth on device and search M48-ANC to connect

Single Mode

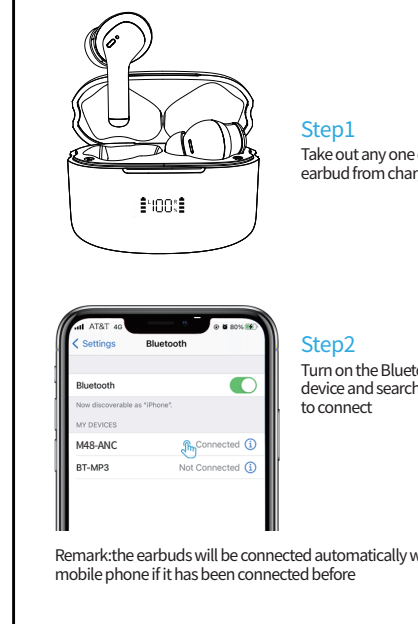


Step1
Take out any one of the earbud from charging case

Step2
Turn on the Bluetooth on device and search M48-ANC to connect

Remark: the earbuds will be connected automatically with mobile phone if it has been connected before

Functions

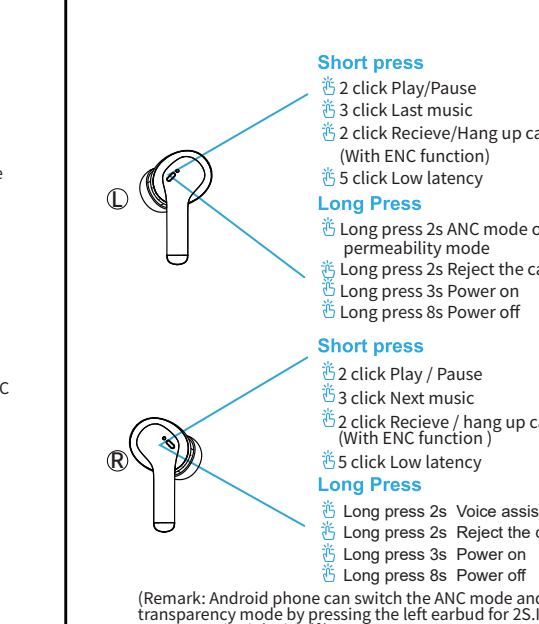

Short press
 2 click Play/Pause
 3 click Last music
 2 click Recieve/Hang up call (With ENC function)
 5 click Low latency

Long Press
 Long press 2s ANC mode or permeability mode
 Long press 2s Reject the call
 Long press 3s Power on
 Long press 8s Power off


Short press
 2 click Play / Pause
 3 click Next music
 2 click Recieve / hang up call (With ENC function)
 5 click Low latency

Long Press
 Long press 2s Voice assistance
 Long press 2s Reject the call
 Long press 3s Power on
 Long press 8s Power off

(Remark: Android phone can switch the ANC mode and transparency mode by pressing the left earbud for 2s. Iphone can customize it by itself.)

Charge

Please use the original charging cable. Fast charging are prohibited.

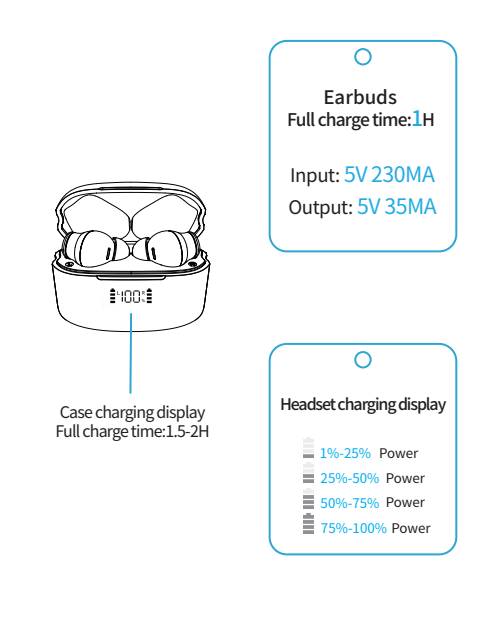

Earbuds
Full charge time: 1H
Input: 5V 230MA
Output: 5V 35MA

Headset charging display
 1%-25% Power
 25%-50% Power
 50%-75% Power
 75%-100% Power

Case charging display
Full charge time: 1.5-2H

Troubleshooting

Pls resolve separately following the instructions if any one of the condition occurs.

1. Left & Right earbud can't be paired successfully with each other
 Situation: Take out the earbuds from charging case, two earbuds always flash blue quickly or there are two Bluetooth name of M48-ANC on the mobile.
 Solution: Turn off both earbuds, delete the connection record M48-ANC displayed in the connection list of the phone or other Bluetooth devices. Then click the right earbud quickly, after 2-3s, both earbuds will flash blue slowly, that means they have paired with each other successfully.

2. Only one earbud can work
 Situation: When connected the mobile, only one earbud working, and the other one flashes blue light quickly, or no light flashes.
 Solution: Delete the connection record M48-ANC displayed in the connection list of the phone or other bluetooth devices. Put two earbuds back into the case close the case and then tack out the earbuds. If both earbuds flash red and blue light, pls click the right earbud quickly, after 2-3s, both earbuds will flash blue slowly, that means they have paired with each other successfully. Then open the mobile bluetooth to search M48-ANC to connect.

3. Earbuds can not be connected with phone
 Solution:
 1) Turn off the earbuds and turn off the bluetooth on mobile, then turn on earbuds and turn on bluetooth on mobile, to search the bluetooth name M48-ANC again.

Troubleshooting

2) If the earbuds has been connected by the mobile phone before, then just need to find the bluetooth name in the bluetooth list, and connected.

3) Delete the bluetooth list record on mobile phone, then search M48-ANC to connect.

4. Earbuds charging case do not display the earbuds charging indicator progress bar.
 Solution:
 1) The earbuds charging indicator progress bar lights will auto off after fully charged. [Take both earbuds out of the charging case, check if they can auto on. If not, please try step 2.)]
 2) Dirty charging pins or thimbles will cause poor contact. [Used alcohol and cotton swabs to clean the charging pins of earbuds and the thimbles of the charging case 3-5 times, then charge them 30-60 minutes before using.]
 3) The charging case or earbuds are completely discharged. [Charge earbuds and the charging case for 20 minutes, earbuds should flash blue lights slowly, if not, please contact us directly.]

Specification

Earbuds:
 Bluetooth version: JL 5.3
 Distance: 10M
 Battery: 35mAh
 Full charge time: 1 hours
 Play time: 4-5hours
 Weight: 8g

Charging case:
 Battery: 230mAh
 Full charge time: 2 hour
 Input: 5V 230MA
 Output: 5V 35MA
 Size: 60*48*27mm
 Weight: 34g