


4.3 Boot screen As the projector start working, after screen display 2 to 5 seconds of boot screen, then come into the multimedia screen




Locate projector vertical to the projection screen, Adjust the keystone whee till you get clear picture (square pixels appear). You can play some video or display the menu to check focus adjustment

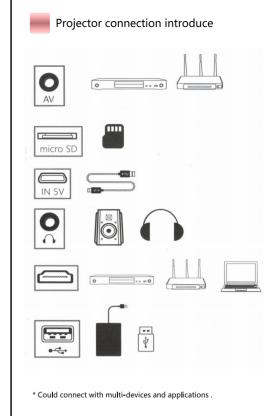


5.2 Multi — media connection

5.2.1 Insert the USB / micro SD card into the accordingly slot . (refer to the picture as below)



5.2.2 Insert LISB / micro SD card with content to relevant ports . Multimedia supported format



Multimedia supported format

| | Audio support | MP3/WMA/OGG/AAC/FLAC/APE/WAV |
|-----------------|---------------|--------------------------------------------------|
| - | Photo support | JPEG/BMP/PNG |
| Multi- media | Video support | 3GP/AVI/MKV/FLV/MOV/MP4/MPG/VOB / MPG/RMVB/RM |
| | Text support | TXT |


5.2.3 Choose the contents which you need to display Movie , Music , Photo and Text.



5.2.4 Choose the file which you want to display, press " 📕 " display or stop.




5.3. AV video equipment Connect Use 3 in 1 cable video convert cable, connect projector AV slot, the connect method like the picture, as connected choose the signal Source video.



5.4. HDMI equipment Connection


5.4.1 HDMI slot could connect to computer and all the device with HDMI slot. As connected, choose the signal



Support files:

576P 480P 720P 1080P 640 * 480 , 800 * 600 1024 * 768 1280 * 1024 1280 * 720 , 1440 * 900 ,1920 * 1080 , 1366 * 768 , 1280 * 800 ,1440 * 960 1600 *1200,1680 * 1050

5.5 3.5mm audio device connect



5.5.1 Could connect 35mm earphone and speaker

6.1 Menu settings

signal reception window.

6.1.1 Image menu Remote control use guide: press" = ' key , then the main menu come Pressout " */ key , come Into the image submenu Press V/A key , choose the program which you want to adjust Then press" OK " key come Into set.

control for a long time, please take the battery Out.

3. When using the remote control, please align the remote

control signal transmitter to the projector's infrared

vou could choose the picture mode . correlated color temperature , aspect ratio 、 noise reduction 、 projection mode , image scaling In the settings.



6.1.2. Audio sub-menu

You could choose the balance , auto volume,

surround sound in the

settings

Press" = ' key and then get the main menu press " ◀/▶" key choose audio submenu. Press " ▼/▲ " key choose the items which you want to adjust . Then press

" OK " key Come into set .



6.1.3 Set time sub-menu

press " \equiv ' key on the remote control, and get the main menu , then press"
" key , choose time submenu, press "V/A" key choose the items which you want to adjust , then press " OK "key come into set.

You could choose the clock. off time, on time, sleep time auto sleep in the settings.



6.1.4 Set sub-menu

Press " \equiv " key on the remote control, then press " ◀/▶" key to set submenu. Press "▼/▲" key, choose the program which need to adjust, then press "OK" key come into setting. You can set the language, back to factory setting, and upgrade software.

6.2 Instruciton of display menu You can control the contents by the display menu.




Power supply by portable charger

Support power supply by portable charger with 5V/2A output. Connect projector Micro USB port with portable charger 5V/2A out port via USB cable to charge the



Built-in battery power supply (Available for models with built-in battery only)

Switch the button under power supply port to "on", then projector will be charged by built-in battery. In this situation, projection brightness will be a little lower. Battery symbol will appear on projection screen to indicate the remained power volume. *It takes about 3 hours for charging.



Technology features

| - | Imaging technology | TFT LCD | | |
|---|---------------------|--------------------------------------|------------------------------|--|
| | Resolution | 480*272 | | |
| | Support resolution | 1920*1080 pixels | | |
| | Light | LED | | |
| | Operation mode | Manual operation | | |
| | Projection distance | 1.5-2M | | |
| | Projection ratio | 1.6:1 | | |
| | Aspect ratio | 16:9 | | |
| | Color | 16.7M | | |
| | | Standard | Adapter:12V-1.5A | |
| | Power supply | | Adapter:12V-1.5A | |
| | точет заррту | Built in battery | Lithium battery:7.4V/1300mAh | |
| - | System support | Multi-media(Music,Picture,Video,TXT) | | |

User Manual

Due to continuous improvement, actual product may different from the manual, manual is for reference only.