

SMART U LOCK USER MANUAL

Model: ZSC-U2i

NOTE!
120 DECIBELS ALARM
 The alarm is loud and has a decibel rating of 120. Please avoid placing the lock next to your ears when the alarm is activated. The extremely loud sound can damage your hearing.

Install the Zovii Scout App

To install the Zovii Scout App, you can find it on the Apple Store or download it from the Google Play Store. During the installation process, the app will request your permission to use Bluetooth, send push notifications, access your location in the background, and connect to devices on your local network.



iOS



Android



First Pairing

- 1 Fully charge the Smart Lock before first use.
- 2 Open the Zovii Scout App and turn on Bluetooth on your phone.
- 3 Tap 'Add' on the home page.
- 4 Briefly press the finger print sensor until you hear a short beep.
- 5 Select 'ZSC-U2i BLE' to connect the Smart Lock with your smartphone.
- 6 Create a password for your Smart Lock.

Locking with Alarm ON (Alarm Mode)

1. Insert the U-shackle into the lock body to lock it. The finger print sensor will flash red, and the app icon will change from grey/green to **blue**. **The phone will emit a "whistle" sound, indicating that the lock has been successfully locked.**
2. If movements are detected while in Alarm Mode and the user is within the Bluetooth connection range, the lock will emit 2 short beeps as a reminder. If the user is outside the Bluetooth connection range, the lock will emit 5 long beeps as a warning. If movements persist, the lock will sound a 25-second alarm accompanied by red light flashes. The alarm will repeat if movements continue. The alarm can be stopped by unlocking the lock.



Locking with Alarm OFF (Transport Mode)

1. Insert the U-shackle into the lock body to lock it, then press and hold the finger print sensor until it flashes blue. The app will emit a signal sound to confirm that the alarm is now set to OFF (Transport Mode). The lock will not emit any warning or alarm if movements are detected during transport mode.
2. Users can also switch to Transport Mode through their smartphone. After successfully locking the lock, the icon on the app will turn blue. Immediately press and hold the icon. After the circle on the icon completes rotation, it will switch from Alarm Mode to Transport Mode. The app will emit a signal sound to confirm the switch.



Waking the Lock

To awaken the lock, simply perform a short press on the fingerprint sensor using any finger. You will hear a "beep" sound confirming the lock has been awakened. The lock becomes operational after being awakened and will enter sleep mode if there is no activity for 1 minute.

Fingerprint Unlocking

1. Wake the lock by performing a short press on the fingerprint sensor.
2. To unlock using the registered fingerprint, simply perform another short press on the fingerprint sensor. The lock will emit a beep sound and a green light, allowing you to pull out the shackle within ten seconds.



Smartphone Unlocking

1. Wake the lock by performing a short press on the fingerprint sensor.
2. To unlock using the smartphone, open the app and tap the lock icon. Upon successful unlocking, the app will emit a signal sound, and the icon will turn **green**.



Power Level and Recharging the Battery

You can check the lock's battery power by looking at the battery symbol on the app. A **blue** icon indicates a normal power level above 30%. However, when the battery drops below 30%, the battery icon will turn **red** and blinks.




If the lock's power level falls below 20%, the red indicator light will flash when the lock wakes up. At this point, all operations will stop, and after 1 minute, the lock will enter sleep mode as a safety measure to preserve battery life and prevent any potential issues. Please charge promptly.



To recharge the battery, follow these steps:

1. Open the waterproof cover of the lock.
2. Take the provided USB-C Charge Cable and fully insert the plug into the terminal of the lock.
3. While the battery is charging, the indicator light will flash red. Once the battery is fully charged, the indicator light will flash green.

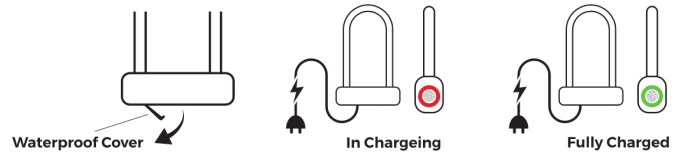

Share Key

1. To share the lock with others, go to the Share Key section and Add New User. You can set the sharing time and period as needed. The shared key will automatically expire after the specified time.
2. Share Management - Each shared content can be found in the 'Manage' section for easy reference.

Record

Go to the Record Section to view all unlocking, locking, and alarm records, along with their respective date times. You can delete all records by selecting the "Delete All" option.

Settings

1. **Unlock Method** — Fingerprint unlocking is the default method, and no selection is required. Simply press the fingerprint head on the lock body with any added fingerprint to unlock. Regardless of the selected mode, all fingerprints added to the lock body can be used for unlocking.
2. **Volume** — The volume settings divide the volume into three levels: Low, Medium, High, with the default set to High. You can adjust the volume slider on the app, and the lock body will produce a corresponding "beep" sound at the selected volume.
3. **Motion Sensitivity** — The vibration sensitivity can be adjusted in the settings, with three levels available: Low, Medium, High, and the default set to Medium. You can adjust the vibration sensitivity slider on the app to the desired position.
4. **GPS Location** — The GPS location feature can be selectively enabled or disabled, with the default setting being enabled. When enabled, you can view the location of the Bluetooth lock on the app's map.
5. **Notification Sound** — The notification sound feature can also be selectively enabled or disabled, with the default setting being enabled. When enabled, the app will provide synchronized sound feedback during the use of the Bluetooth lock. The synchronization sound will not play when the feature is disabled.
6. **Language Selection** — The app page can be displayed in either English or Chinese. The default language is English.
7. **Device Upgrade** — "Device upgrade" refers to updating the existing firmware of the lock body. There are two methods to perform a device upgrade: direct upgrade and local upgrade.
8. **Change Admin Password** — You can add a common unlocking password in addition to the administrator password. Please note that ordinary unlocking passwords can only be used for password unlocking and do not grant access to other settings.
9. **Fingerprint Management** — In the fingerprint management section of the settings, you can add new fingerprints by confirming them with the administrator's fingerprint. During the fingerprint addition process, you need to press the fingerprint sensor 5 times continuously and confirm the new fingerprint before it can be successfully added. The maximum number of fingerprints that can be added is 50.
10. **Self-Check** — You can perform a self-test to initiate a device self-test on the lock, ensuring it operates normally.
11. **Reset** — To restore the factory settings of the lock, click Reset. This action will clear all original settings and restore them to the factory state. The Bluetooth lock will be removed from the app's door lock list.
12. **Version Number** — The system will automatically check for any available app upgrades. If a new version is found, the app will be upgraded to the latest version.


FAQs:

The indicator light is flashing Red.	The battery is running at less than 30% and needs to be recharged.
The indicator light is flashing slowly.	The battery is running at less than 20% and needs to be recharged immediately.
Abnormal Locking.	When the green light on the fingerprint sensor is illuminated, remove the lock shackle and lock it again.
Lock Unresponsive.	Plug in the USB for charging to restore functionality.
Mobile phone connection abnormality.	Enable Bluetooth on your phone and keep it within 2 meters of the lock.

Specifications:

Weight	1327.5g
Transmission Power	-20dBm ~ +7dBm
Radio Frequency	2402MHz ~ 2480MHz
Storage Temperature	-10 ~ 50°C
Storage Temperature	-10 ~ 25°C
Dust and Water Resistance	IP67
Each Packaging Content	1 Zovii Smart Lock 1 USB-C Charge Cable

Dimensions (LxWxH)
*All Dimensions are in mm



Warranty

One Year Manufacturer Warranty

Zovii warranty obligations for the Zovii product you have just purchased (the "Product") are limited to the terms set forth in this document. **Zovii warrants the Product against defects in materials and workmanship for a period of one (1) year from the date of original purchase ("Warranty Period") when the Product is purchased through an authorized reseller.** If a defect arises and a valid claim with photo is received by Zovii within the Warranty Period, at its option, Zovii will repair the Product or exchange the Product with a functionally equivalent new product. If the Product is exchanged, the replacement product becomes your property. When a refund is given, the Product becomes Zovii's property.

Exclusions and Limitations

Zovii's limited warranty applies only to the Product when purchased through an authorized reseller. The warranty does not apply to any non-Zovii product, even if packaged or sold with the Product. The warranty excludes without limitation any scratching or surface damage, even if packaged or sold with the Product. This warranty applies only to the normal use of the Product, in accordance with written use instructions. **This warranty does not apply to damage caused by accident, abuse, misuse, or modification of the Product.** Products that have been altered or modified are not covered, including those changes made due to improper or unauthorized repair.

No Other Warranties

To the maximum extent permitted by law, this warranty and the remedies set forth above are exclusive and in lieu of all other warranties, remedies and conditions, whether oral or written, express or implied. Zovii specifically disclaims any and all implied warranties, including, without limitation, warranties of merchantability and fitness for a particular purpose. If Zovii cannot lawfully disclaim or exclude implied warranties under applicable law, then to the extent possible any claims under such implied warranties shall expire on expiration of the warranty period. No Zovii reseller, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

Damages Limitation

To the maximum extent permitted by applicable law, in no event shall the Company or its suppliers be liable for any special, incidental, indirect, or consequential damages whatsoever (including, but not limited to, damages for loss of profits, for business interruption, for personal injury).

Consumer Protection

For consumers who have the benefit of consumer protection laws or regulations in their country of purchase or, if different, their country of residence, that cannot be disclaimed as set forth above ("consumer laws"), the benefits conferred by this warranty are in addition to all rights and remedies conveyed by such consumer laws. To the extent that liability under such consumer laws may be limited, Zovii's liability is limited, at its sole option, to replacement or repair of the product.

Contact Us

If you need any support on this product, feel free to email us support@zoviitech.com Our staffs are ready to answer any of your questions.

www.zoviitech.com

[zoviitech](https://www.facebook.com/zoviitech)

[zoviitech](https://www.instagram.com/zoviitech)

[Zovii Tech](https://www.youtube.com/channel/UCzoviitech)

For more info.

