


# WR08

## WIRELESS CHARGER NIGHT LIGHT

PRODUCT MANUAL-EN

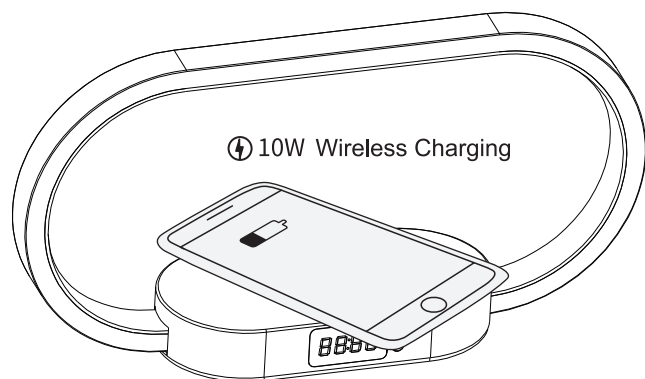

WIRELESS  
CHARGING




### Product Parameters

Model	WR08	Wireless Charging	10W
Material	Wood + Aluminum	CCT	6000k-4500k-3000k
Dimmer Way	Touch Control	USB Output	5V/1A
Lumen	270lm	Color	Burlywood+White
Size(mm)	L300*W80*H160	Input Voltage	Type-C 9V2A
Accessories	Product Manual / Type-C Power Cable / Power Adapter		

### Lamplight Adjust

Three color temperatures are available, and the light can be adjusted by touching any position of the light arm:


- Click: On and Switch Cool White Light → Natural Light → Warm White light → Off and cycle accordingly.
- Long Press: Steplessly increase or decrease the brightness of the light.

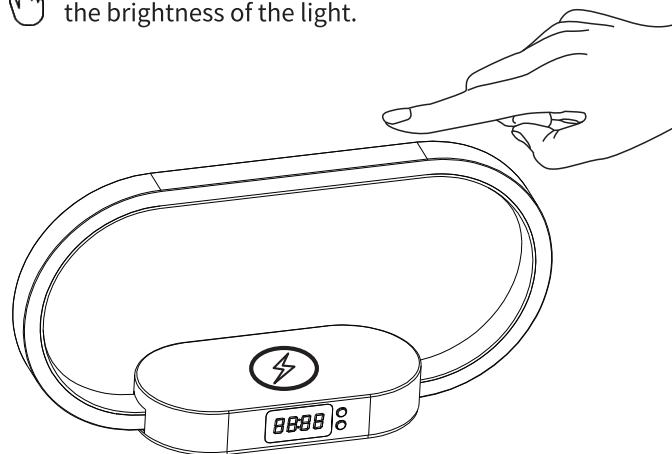

### 10W Wireless Charging


After the power is connected, wireless charging can be used normally, and the phone supporting wireless charging can be charged by placing it in the wireless charging area.

If the phone does not have wireless charging function, you can buy the wireless charging induction board suitable for your phone model to charge.

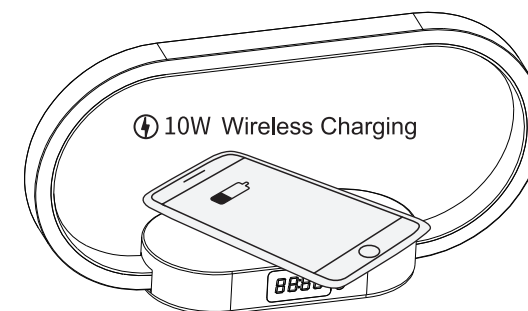


### USB Charging Port

When the light is connected to the power supply, the USB output port can charge your phone, tablet or other devices.

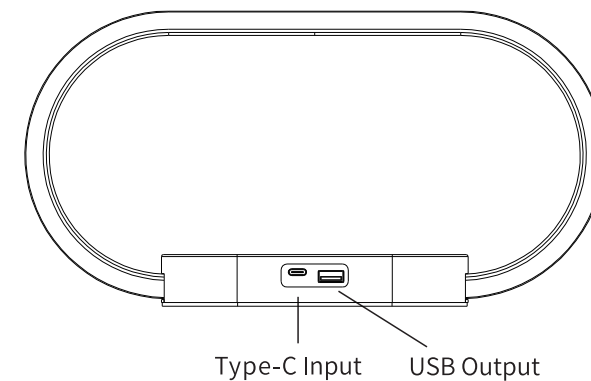

## Clock Display

This table lamp with clock function, more convenient to get the time information.



### 1. Clock Brightness Adjustment:

In the normal clock display mode, single press "up" button switch the clock brightness (100%-70%-30%-OFF)

### 2. Reset settings and 12/24 hour switch:

- Long press "up" button for 5 sec→display 88:88→wait for 3 sec→complete the reset setting
- Single press "down" button→switch 24 hour/12 hour  
24 hour mode→display 0:00  
12 hour mode→display 12:00

### 3. Clock Setting:

- Press and hold "down" button for 5 sec enter the clock setting mode (clock flickers)
- Single press "down" button→enter minute setting (minute flickers)
- Single or long press the "up" button→minute digital adjustment
- Single press "down" button→enter hour setting (hour flickers)
- Single or long press the "up" button→hour digital adjustment
- Single press "down" button→exit clock setting

## ■ Cautions

1. Please use the matching power adapter, otherwise it will affect the efficiency of wireless charging.
2. If the phone is equipped with a protective case made of metal on the back, it cannot be charged wirelessly and must be disassembled for use.
3. Charging problems: Please adjust the device to the appropriate position of the charging board.
4. Please place it in a cool and dry indoor place with no direct sunlight at a temperature between 0-45°C.