

# INSTALLATION INSTRUCTION

## BEFORE YOU START, HERE IS SOME IMPORTANT INFORMATION.

### 1) General Information

Please inspect this product upon delivery. Any issues must be reported to the supplier immediately. Any damage or defects reported later will not be accepted. Take care when handling glass parts to avoid heavy contact between the glass edges and any hard surface.

### 2) Additional Notes

- It is recommended that your mirror is installed by a qualified electrician in accordance with Electrical regulations and Building Regulations.
- Please ensure your mains supply is isolated before installation.
- Ensure the mounting surface is dry and suitably strong enough for the product.
- Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.
- Make sure installation of the silicon rubber hermetic parts, and seal ring around the edge of cover well to guarantee the IP rating.
- We do not accept responsibility for any problems that may occur through incorrect installation.

### 3) Maintenance

It is recommended that mirrors are cleaned with a soft, dry, non-abrasive cloth. Do not use abrasive cleaning materials, or chemical cleaners as this will damage the mirror surface and edges.

①

## TOOLS REQUIRED

Description	Parts Image
Tape Measure	
Spirit Level	
Pencil	
Drill	
Cross Head Screwdriver	
Hammer	

## WHERE TO INSTALL THIS MIRROR



This mirror is IP44 rating and is suitable for installation in Zones 2 or beyond.

### NOTE:

The packaging you have received with your product is 100% recyclable. It must be disposed of in a safe and environmentally friendly way. Suggest to take it to the local landfill site and discard it in the designated bins.

②

## INSTALLATION STEPS

### STEP 1

ISOLATE THE MAINS POWER SUPPLY TO THE ELECTRICAL FEED THAT WILL POWER YOUR MIRROR.

### STEP 2

Unpack the product to get the mirror and installing accessories.

### STEP 3

Mark and drill the installing holes on the wall after measuring the holes at the back of mirror; Insert the wall plugs and screws on the wall ensuring the screws head is 4-6mm outside.

### STEP 4

Wire the main power supply to the terminal block as follows.

BLACK OR BROWN --- TERMINAL MARKED L (LIVE);

WHITE OR BLUE --- TERMINAL MARKED N (NEUTRAL);

**WARNING:** This appliance is not earthed.

### STEP 5

Slot the mirror onto the four wall screws through the holes.

Ensure the mirror is clamped firmly by the screws on the wall.

## MANUAL TO LED MIRROR WITH TOUCH SWITCH ONLY


The sequence of functions by short-touching the key are as below: Light up/Light off

3


## DIAGRAMS



STEP 2

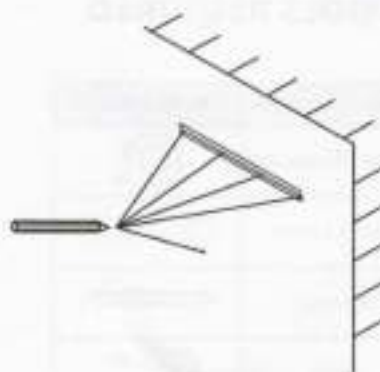

STEP 3

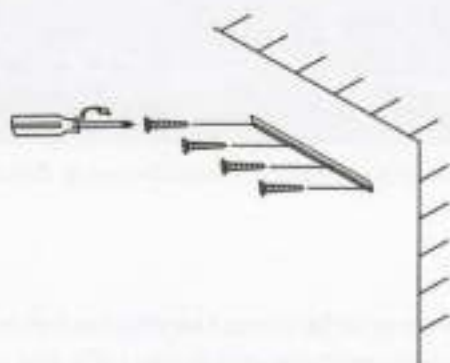

STEP 4



STEP 5

4