

S6 4G Video Door Phone

Quick Installation Guide

www.alarmsecur.com

Quick Installation

Install Software

- Search for LiveCloud in the App Store or Google Play.
- Download the LiveCloud app.



LiveCloud




Google play

App Store

Insert 4G SIM card


Note: Have your 4G SIM card before installation.

- Make sure your 4G SIM is valid.
- Insert 4G SIM Card to SIM socket.



Connect the power cord

- Plug the power cord's 2 Pins port into power port.
- Plug the power cord's DC port to 12V-18V DC power adapter.



Launch the LiveCloud app

- Launch the LiveCloud app.
- Sign in your phone number account with SMS code or password.
- Set a new password for the first login.




Add the 4G door phone

- Tap + and select **Add 4G device**.
- Input device ID and password.
- Follow the instructions in app to name the door phone and its location.



Note: Tap **Detail** to check the detail info of device and name it.

Operation

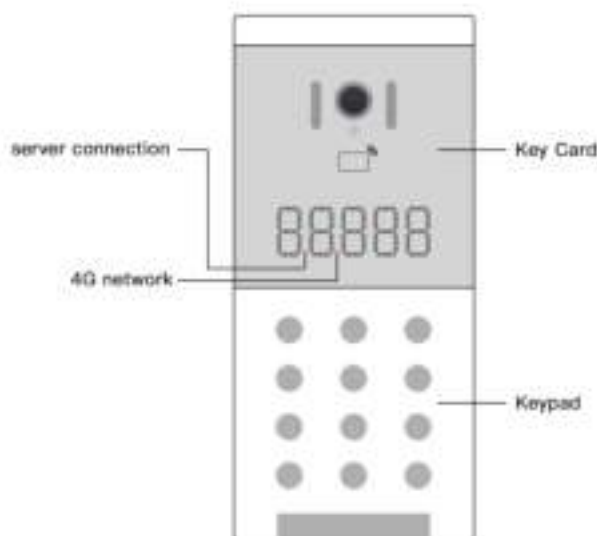

Connection LEDs

- The LEDs indicate 4G network and server connection status:

ON	disconnected
OFF	connected

Keypad

- Room number

1. Press the key to input a digit Long press the key to enter/exit the alphabet mode, short press to select an alphabet, press any other key to input the alphabet.

2. Press # to delete the input.

3. Input 5 letters room number to video call.

4. Press # to end the call.

- PIN code

1. Press * to enter PIN code input mode.

2. Input 5 digits PIN code to unlock the door.

3. Press # to delete the input.

- Phone Number

1. Long press * to enter phone number input mode.

2. Input phone numbers and end with * to voice call.

3. Press # to end the call.

Key Card

- Select a room in app to add a new key card.

- can a new key card 2 times in 60 sec.

- Show the key card ID if success.

- Scan the key card to unlock the door.

- Add key card to the room

1. Press a room number to select a room.

2. Press + button and select **Key card**.

3. Scan a new key card 2 times in 60 sec.

Add PIN code to the room

- Tap the arrow button on the right side of the smart lock.

- Press **PIN code** button.


- Press + button and select a room.

- Input 5 digits PIN code and Tap **OK**.




Answer video call and unlock the door

Note: Allow notifications of App on your phone, and enable display notification on banners.

- Press  button to answer a video call.

- Press  button to select a lock and Tap **Unlock**.

- Press  button to hang up the call.



Reset

- Recover to factory setting and clean all data of PIN code and key cards.

SD card

- You can insert a compatible SD card, up to 128GB. It stores 24/7 video and auto loop cover old video.

App Overview

Add the residents

- Press **Resident** button.

- Add room

1. Press + button.

2. Input a 5 letters room number and Tap **OK**.

- Add resident's phone number to the room

1. Press a room number to select a room.

2. Press + button and select **Phone number**.

3. Input resident's phone number and Tap **OK**.



Enable and check video logs

- Press **Detail** button.

- Press **Video log** and enable it.

- Press **view all** of call log and check video logs.

- Press **Unlock records** of smart lock and check video logs.



Placement

On/In the Wall

- You can mount the door phone directly to the wall.

With Table Bracket

- Place the door phone on a table for interroom.

With Floor Stand

- Place the door phone beside the gate.