

# User Manual


## Portable Wireless Car Kit

BTCK-210







Product overview .....	1
What's in the box .....	1
Basic operations .....	2
Pairing and connecting .....	2
Multi-point: Pairing and connecting 2 phones simultaneously .....	4
Clear pairing history .....	4
How to charge .....	4
Product specifications .....	5

# Overview

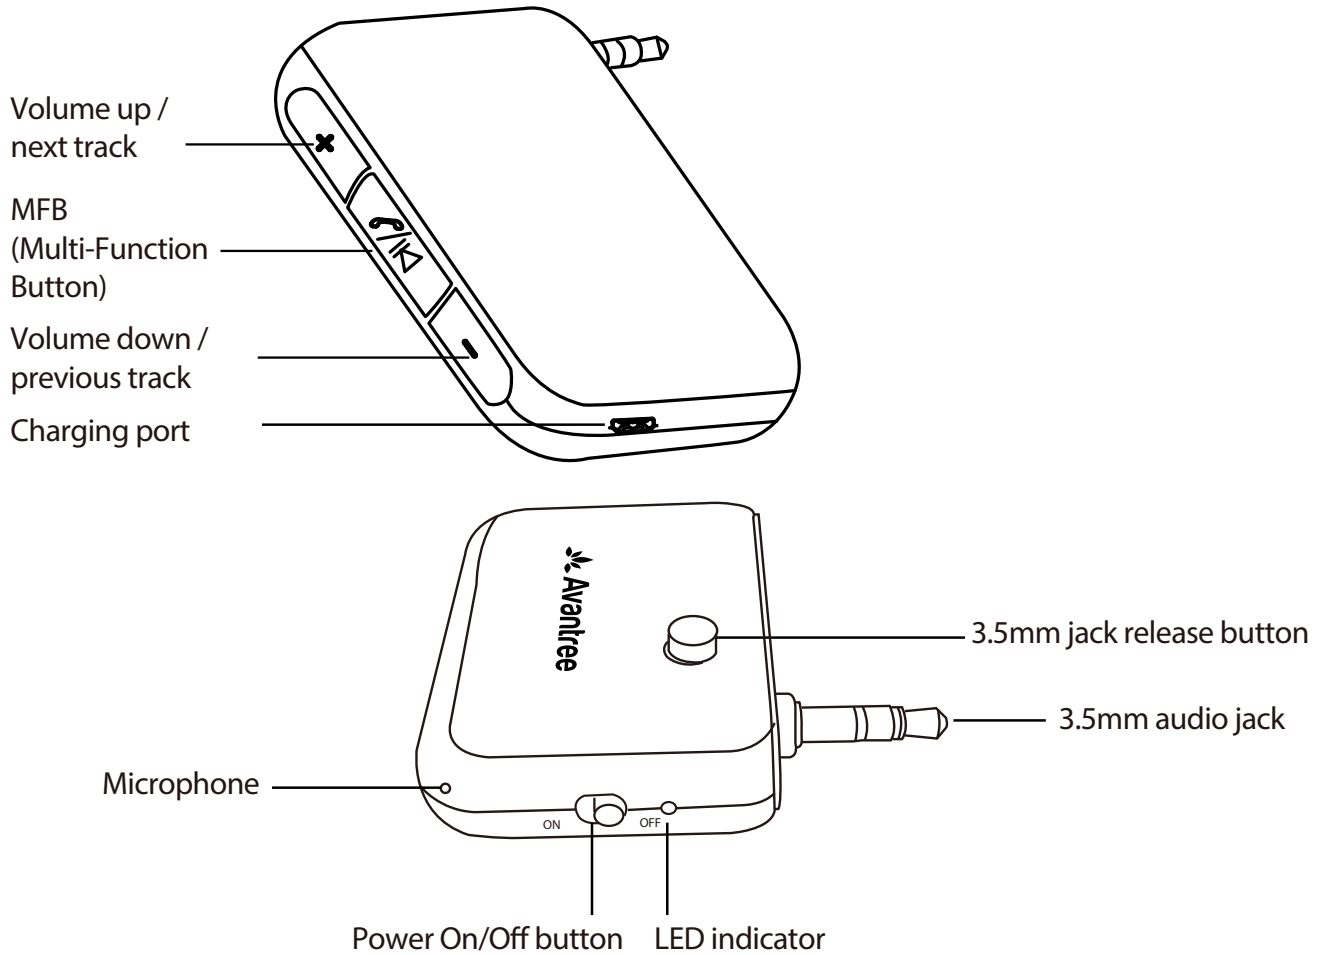

## What's in the box?

- A. Avantree Bluetooth receiver
- B. 3.5mm extension cable
- C. USB charging cable
- D. User manual / Quick user guide




# Basic operations


Component	Function	Operation
Power Switch	Power On/Off	Slide to ON/OFF position
MFB	Pairing mode	Press and hold for 2 seconds until the LED flashes Blue and Red alternately
	Manually re-connect	Press once
	Answer/End a call	Press once
	Reject a call	Press and hold for 1 second
	Redial	Double click
	Voice dial (phone feature)	Press and hold for 1 second
	Play/Pause	Press once
V+	Volume Up	Long press
V-	Volume down	Long press
V+	Next track	Press once
V-	Previous track	Press once

# Pairing and connecting


**Step 1** Release 3.5mm plug (press button on top). (Note: to retract plug, press and hold button to release lock).

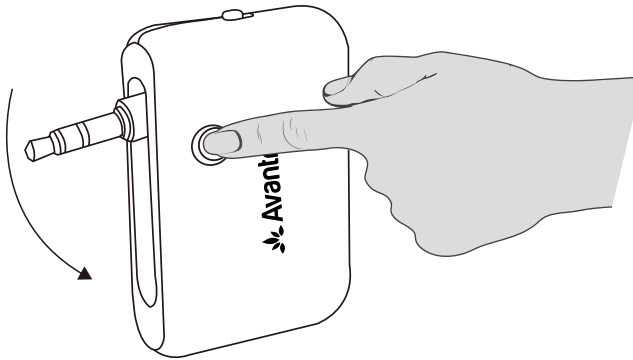


**Step 2** Plug the Avantree Bluetooth CK210 into the 3.5mm port of car stereo then turn CK210 ON.

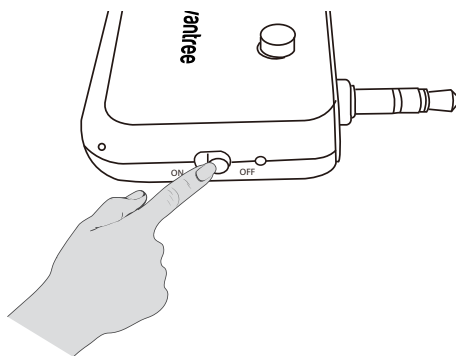


**Step 2** Press and hold the MFB for 3 seconds to enter pairing mode(Note: On first use the CK210 will automatically enter pairing mode).

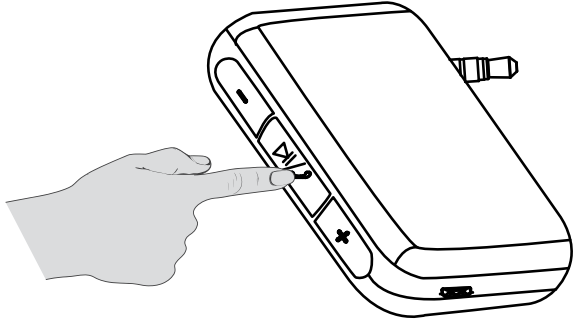

**Step 3** Activate Bluetooth on your phone - search for new devices.

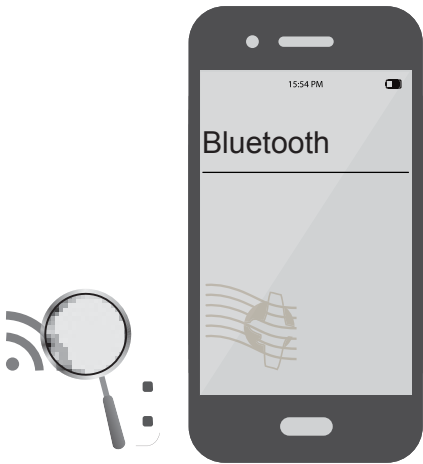

**Step 4** Select "Avantree CK210" on your phone.

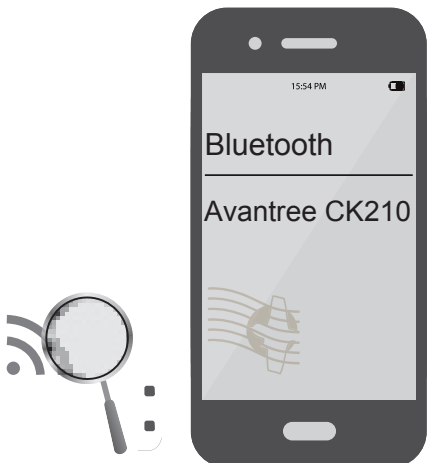


**Note:**

Once paired and connected, it will auto re-connect the next time.

## Multi-point: pairing 2 phones simultaneously

---

- Step 1** Connect the first phone (instructions above) then turn off its Bluetooth function.
- Step 2** Set the CK210 into pairing mode again.
- Step 3** Turn on Bluetooth on the second phone and connect with the CK210.
- Step 4** Reboot the CK210 by turning it off then on again. Turn on the Bluetooth on the first phone. Both phones will now be connected to the CK210.

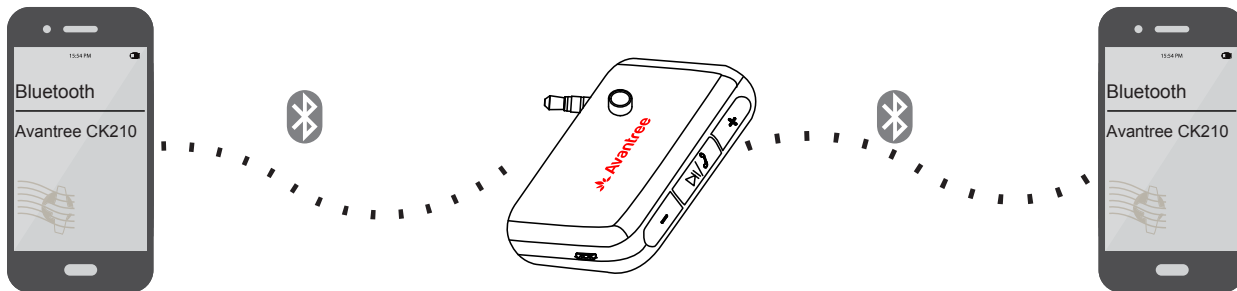

## Clear pairing history

---

You may need to reset the CK210 if it is not working as expected. When reset to its factory default settings, all the paired device information will be erased.


- Step 1** Set the CK210 to PAIRING MODE – press and hold the MFB for 3 seconds until the LED flashes **BLUE** and alternately.
- Step 2** Double click the MFB – the **BLUE** and LEDs will turn on for 1 second to indicate a successful reset. Then it will automatically enter pairing mode.

## How to charge

---

When the battery runs low, the LED will flash every 2 seconds. Recharge the CK210 by plugging it into a USB car charger (not supplied) or PC USB port using the supplied charging cable. It normally takes 1.5 hrs to fully charge the battery. The LED will indicate red when charging and turn off when charging is completed.

Charging requirements: DC5.0V/ 500mA-1A.

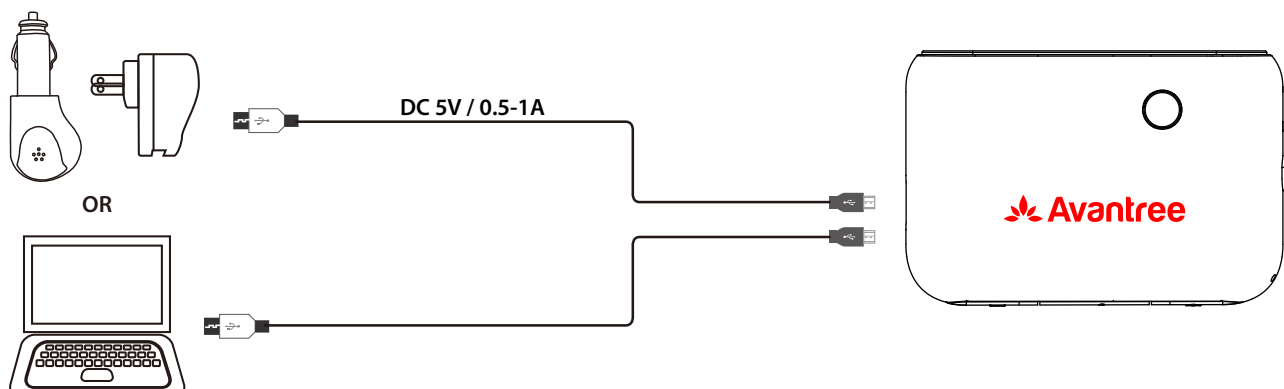

# Product specifications

---

- BT Version: 4.0
- Support Profile: A2DP, AVRCP, HSP, HFP
- Operation Frequency Band: 2.4GHz ~ 2.48GHz unlicensed ISM band
- Operation Range: Class 2, Up to 30ft.
- Working Time: 8 hours
- Standby Time: 130 hours
- Charging Time: 1.5 hours
- Charger Voltage: DC5.0V, 500mA