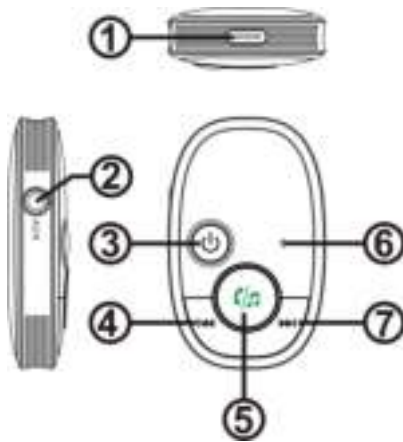# bluetooth Receiver BR06 Manual

Thank you for purchasing our bluetooth receiver BR06 ! This product has the characteristics of low distortion, low power consumption, low delay, high fidelity, stereo and so on,please read the manual carefully before use!

I. Schematic illustration

1. TYPE-C 5V charging port
2. AUX port
3. On/off button/clear pairing
4. Last song/Volume -
5. Phone/play/pause key
6. MIC
7. Next song/Volume +

II. Product features

1. bluetooth V5.0
2. Clear all paired bluetooth information
3. Automatically connect the paired bluetooth device after power on
4. Ten minutes no device connection, automatic shutdown
5. Play time:about 7.5 hours after full charge
6. bluetooth support A2DP,AVRCP,HFP,HSP
7. Support bluetooth DSP technology of stereo music
8. Aux output
9. Voice broadcast caller number
10. Private answer

III. Operating instructions

1. Pairing for the first time

1.1 Long press" ⏻ "3 seconds to power on,the blue lights flashing (to reset bluetooth, double-click" ⏻ "to clear bluetooth pairing information)

1.2 The blue lights flash when searching for bluetooth,search bluetooth name "BR06", after the pairing is successful, prompt bluetooth connection is successful, the blue light is always on.

2. Use bluetooth hands-free calling

2.1 Answering the call
On the status of bluetooth, to answer the incoming call, press" 📞 "to answer, press" 📞 "again to hang up.

2.2 Rejecting the call
When a call coming but you don't want to answer it, long press" 📞 "two seconds to reject call.

2.3 Private answer
When you want to use your own phone to answer a call, long press the" 📞 "button for 2 seconds to switch between the phone and bluetooth

2.4 Double click" 📞 "to call back the last call

3. Siri/Voice assistant function
After connect bluetooth successful, long press the" 📞 "button for 3 seconds to activate siri/ voice assistant.(Phone list: iPhone, Samsung and smart phone with android system)   Note: Some phones do not support this function.

4. When in bluetooth play，short press" ⏮ "for last song;short press" ⏭ "for next song；short press" 📞 "pause or play.

5. Adjust volume: long press" ⏮ "for volume -; long press" ⏭ " for volume+,max volume have prompt.

6. Automatic shutdown
It will automatically shut down if without any

device connection or any operations within 10 minutes.

7. Charge
The red light is always on when charging; light goes out when it is fully charged.

8. Low voltage alarm
When the battery power is too low, the red light flashes and the voice prompts "low power" every minute, it will automatically shut down at the fourth time. Shut down directly when the battery voltage is lower than 3.2V

IV. Technology Specs:

Charging voltage	5V
Working current	35mA
Shut off current	0uA
Charging time	About 60mins
Working time	About 7.5H
Battery capacity	240mAh
bluetooth Ver.	Version 5.0
bluetooth audio processing	DSP and A2DP(Advance Audio Distribution Profile)
bluetooth frequency	2.402-2.480GHz
bluetooth transmission distance	Straight line 10M
bluetooth MIC effective distance	0.5~2M
bluetooth transmission	6dbm

output power	

V. Troubleshooting:

No response on power	.Long press the power button again .Plug in the charging cable to charge it for 5 minutes before turning it on
Can't play	. Make sure the connected device is working properly ·Clear bluetooth pairing and re-pair bluetooth ·Is the audio cable plugged in properly
Can't charge	. Please pull out the charging cable and re-insert it . Try another charger

VI. Warm tips:
1. Do not use this product in a dusty and humid environment with extremely high and low temperatures.
2. Do not drop the product to avoid surface damage or breakdown.
3. Do not disassemble the product,if you have any questions, please contact your dealer
4. Due to continuous improvement and enhancement of technology,changes in product performance and functionality are subject to change without notice.

VII. Packaging
1. Manual   2. Main product
3. Audio connector
4. Charging cable   5. Audio cable