

Operating and installation instructions Ceramic hobs with induction



To avoid the risk of accidents or damage to the appliance it is **essential** to read these instructions before it is installed and used for the first time.

en-GB M.-Nr. 10 110 110

Contents

Warning and Safety instructions	4
Caring for the environment	13
Overview	14 15
Before using for the first time	17
Induction The induction principle Noises Pans	18 19
Tips on saving energy	21
Setting range	22
Operation How the hob is operated	23 24 24 24 25 25 26 27 29
Timer	30 32
Additional functions	34
Safety features System lock / Safety lock Safety switch-off	35

Contents

Overheating protection	37
Cleaning and care	38
Programming	40
Problem solving guide	43
Optional accessories	47
Miele@home / Con@ctivity	48
Safety instructions for installation	50
Safety distances	51
Hob with frame or bevelled edge Installation notes Building-in dimensions KM 6388 Installation	55 56 56
Flush-fitted hobs Installation notes Building-in dimensions KM 6389 Installation	58 59 59
Electrical connection Wiring diagram	64
After sales service, data plate, guarantee	65

This hob complies with all relevant safety requirements. Inappropriate use can, however, lead to personal injury and damage to property.

To avoid the risk of accidents and damage to the appliance, please read these instructions carefully before installation and before using it for the first time. They contain important notes on installation, safety, use and maintenance.

Miele cannot be held liable for damage caused by non-compliance with these instructions.

Keep these instructions in a safe place and ensure that new users are familiar with the content. Pass them on to any future owner.

Correct application

- This hob is intended for domestic use and use in other similar environments.
- This hob is not intended for outdoor use.
- ▶ It is intended for domestic use only to cook food and keep it warm. Any other use is not supported by the manufacturer and could be dangerous.
- ▶ People with reduced physical, sensory or mental capabilities, or lack of experience and knowledge who are not able to use the hob safely on their own must be supervised whilst using it. They may only use it unsupervised if they have been shown how to use it in safely and recognise and understand the consequences of incorrect operation.

Safety with children

- Children under 8 years of age must be kept away from the hob unless they are constantly supervised.
- Children 8 years and older may only use the hob unsupervised if they have been shown how to use it in a safe way and can recognise and understand the consequences of incorrect operation.
- Children must not be allowed to clean the hob unsupervised.
- ▶ Please supervise children in the vicinity of the hob and do not let them play with it.
- The hob gets hot when in use and remains hot for a while after being switched off. Keep children well away from the hob until it has cooled down and there is no danger of burning.
- Danger of burning.

Do not store anything which might arouse a child's interest in storage areas above or next to the hob. Otherwise they could be tempted into climbing onto the appliance.

- ▶ Danger of burning or scalding.Place pots and pans on the cooking zone in such a way that children cannot pull them down and burn themselves.
- ▶ Danger of suffocation. Packaging, e.g. plastic wrappings, must be kept out of the reach of babies and children. Whilst playing, children could become entangled in packaging or pull it over their head and suffocate.
- Activate the system lock to ensure that children cannot switch on the hob inadvertently. Use the safety lock when the hob is in use to prevent children from altering the settings selected.

Technical safety

- ► Unauthorised installation, maintenance and repairs can cause considerable danger for the user. Installation, maintenance and repairs must only be carried out by a Miele authorised technician.
- ▶ Do not use a damaged appliance. It could be dangerous. Check the hob for visible signs of damage.
- ► Reliable and safe operation of this hob can only be assured if it has been connected to the mains electricity supply.
- The electrical safety of this hob can only be guaranteed when correctly earthed. It is essential that this standard safety requirement is met. If in any doubt please have the electrical installation tested by a qualified electrician.
- ➤ To avoid the risk of damage to the hob, make sure that the connection data on the data plate (voltage and frequency) match the mains electricity supply before connecting it to the mains. Consult a qualified electrician if in doubt.
- ▶ Do not connect the hob to the mains electrical supply by a multisocket adapter or extension lead. These are a fire hazard and do not guarantee the required safety of the appliance.
- For safety reasons, this hob may only be used after it has been built in.
- This hob must not be used in a non-stationary location (e.g. on a ship).
- Never open the casing of the hob.

 Touching or tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults.
- ► While the hob is under guarantee, repairs should only be undertaken by a Miele authorised service technician. Otherwise the guarantee is invalidated.

- ► Miele can only guarantee the safety of the appliance when genuine original Miele replacement parts are used. Faulty components must only be replaced by Miele spare parts.
- The hob is not intended for use with an external timer switch or a remote control system.
- The hob must be connected to the electricity supply by a qualified electrician (see "Electrical connection").
- ▶ If the connection cable is damaged, it must be replaced with a special connection cable type H 05 VV-F (PVC insulated). See "Electrical connection".
- ▶ The hob must be disconnected from the mains electricity supply during installation, maintenance and repair work. Ensure that power is not supplied to the appliance until after it has been installed or until any maintenance or repair work has been carried out.
- ▶ If the hob is fitted with a communication module, in addition to disconnecting the hob, this module must also be disconnected from the mains electricity during installation and maintenance of the hob as well as while any repair work is being carried out.
- Danger of electric shock.
- Do not use the hob if it is faulty, or if the ceramic surface is cracked, chipped or damaged in any way. Switch it off immediately, disconnect it from the mains electricity supply and contact Miele.
- If the hob is installed behind a furniture panel (e.g. a door), ensure that the door is never closed whilst the hob is in use. Heat and moisture can build up behind a closed furniture panel and cause subsequent damage to the hob, the housing unit and the floor. Do not close the door until the residual heat indicators have gone out.

Correct use

- The hob gets hot when in use and remains hot for a while after being switched off. There is a danger of burning until the residual heat indicators go out.
- Due to the high temperatures radiated, objects left near the hob when it is in use could catch fire.

Do not use the hob to heat up the room.

Dil and fat can overheat and catch fire. Do not leave the hob unattended when cooking with oil and fat. If it does ignite do not attempt to put the flames out with water.

Disconnect the hob from the mains and use a suitable fire blanket, saucepan lid, damp towel or similar to smother the flames.

- Flames could set the grease filters of a cooker hood on fire. Do not flambé under a cooker hood.
- Spray canisters, aerosols and other inflammable substances can ignite when heated. Therefore do not store such items or substances in a drawer under the hob. Cutlery inserts must be heat-resistant.
- Do not heat an empty pan.
- ▶ Do not heat up food in closed containers e.g. tins or sealed jars on the hob, as pressure can build up in the container, causing it to explode.
- ▶ Do not cover the hob, e.g. with a hob cover, a cloth or protective foil. The material could catch fire, shatter or melt if the hob is switched on by mistake or if residual heat is still present.
- ▶ When the appliance is switched on either deliberately or by mistake, or when there is residual heat present, there is the risk of any metal items left on the hob heating up, with the danger of burning. Depending on the material, other items left on the hob could also melt or catch fire. Damp pan lids might adhere to the ceramic surface and be difficult to dislodge. Do not use the appliance as a resting place. Switch the cooking zones off after use.

- ➤ You could burn yourself on the hot hob. Protect your hands with heat-resistant pot holders or gloves when handling hot pots and pans. Do not let them get wet or damp, as this causes heat to transfer through the material more quickly with the risk of scalding or burning yourself.
- When using an electrical appliance, e.g. a hand-held food blender, near the hob, ensure that the cable of the electrical appliance cannot come into contact with the hot hob. The insulation on the cable could become damaged.
- ► Grains of salt, sugar and sand (e.g. from cleaning vegetables) can cause scratches if they get under pan bases. Make sure that the ceramic surface is clean before placing pans on it.
- Even a light object can cause damage in certain circumstances. Do not drop anything on the ceramic surface.
- ▶ Placing hot pans on the sensors and indicators could damage to the electronics underneath. Do not place hot pans on the sensors or indicators.
- ▶ Do not allow solid or liquid sugar, or pieces of plastic or aluminium foil to get onto the cooking zones when they are hot, as they can damage the ceramic surface when it cools down. If this should occur, switch off the appliance and scrape off all the sugar, plastic or aluminium residues whilst still hot, using a shielded scraper blade. Wear oven gloves. Allow the cooking zones to cool down and clean them with a suitable ceramic hob cleaning agent.
- Pans which boil dry can cause damage to the ceramic glass. Do not leave the hob unattended whilst it is being used.
- ► Only use pots and pans with smooth bases. Rough bases will scratch the ceramic glass.
- Lift pans into position on the hob. Sliding them into place can cause scuffs and scratches.

- ▶ Induction heating works extremely quickly and so the base of the pan could heat up to the temperature at which oil or fat self-ignites within a very short time. Do not leave the hob unattended whilst it is being used.
- ► Heat oil or fat for a maximum of one minute. Do not use the Booster function to heat oil or fat.
- For people fitted with a heart pacemaker: Please note that the area immediately surrounding the hob is electromagnetically charged. It is very unlikely to affect a pacemaker. However, if in any doubt, consult the manufacturer of the pacemaker or your doctor.
- To prevent damage to items which are susceptible to electromagnetic fields, e.g. credit cards, digital storage devices, pocket calculators, etc, do not leave them in the immediate vicinity of the hob.
- Metal utensils stored in a drawer under the hob can become hot if the appliance is used intensively for a long time. Do not store any metal items or utensils in a drawer under the hob.
- This hob is fitted with a cooling fan. If a drawer is fitted directly underneath the hob, ensure that there is sufficient space between the drawer and its contents and the underside of the appliance in order to ensure sufficient ventilation of the hob. Do not store pointed or small items or paper in the drawer. They could get in through the ventilation slots or be sucked into the housing by the fan and damage the fan or impair cooling.
- ▶ Do not use two pans on a cooking zone, extended zone or PowerFlex zone at the same time.
- If the pan only partially covers the cooking zone, the handle could become very hot.
- Ensure that you always place the pan in the middle of the cooking zone.

Cleaning and care

- ▶ Do not use a steam cleaning appliance to clean this hob. The steam could reach electrical components and cause a short circuit.
- ▶ If the hob is built in over a pyrolitic oven, the hob should not be used whilst the pyrolitic process is being carried out, as this could trigger the overheating protection mechanism on the hob (see relevant section).

Caring for the environment

Disposal of the packing material

The packaging is designed to protect the appliance from damage during transportation. The packaging materials used are selected from materials which are environmentally friendly for disposal and should be recycled.

Recycling the packaging reduces the use of raw materials in the manufacturing process and also reduces the amount of waste in landfill sites.

Disposing of your old appliance

Electrical and electronic appliances often contain valuable materials. They also contain materials which, if handled or disposed of incorrectly, could be potentially hazardous to human health and to the environment. They are, however, essential for the correct functioning of your appliance. Please do not therefore dispose of it with your household waste.




Please dispose of it at your local community waste collection / recycling centre or contact your Dealer for advice.

Ensure that it presents no danger to children while being stored for disposal.


Overview

Hob

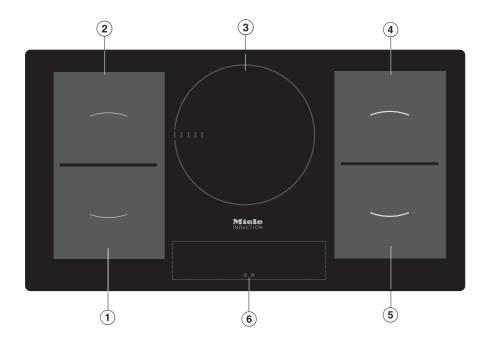

- 1 PowerFlex cooking zone with TwinBooster
- 2 PowerFlex cooking zone with TwinBooster
- 12 can be combined to form a PowerFlex cooking area
- 3 Cooking zone with TwinBooster
- 4 PowerFlex cooking zone with TwinBooster
- 5 PowerFlex cooking zone with TwinBooster
- 45 can be combined to form a PowerFlex cooking area
- 6 Controls / Indicators

Controls / Indicators

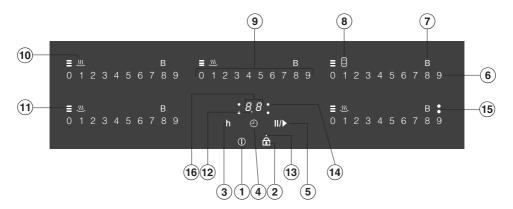

Sensor controls

- 1 On/Off
- 2 For activating/deactivating the system lock/safety lock
- 3 For switching the timer to hours
- (4) Timer
 - For switching on/off
 - For switching between timer functions
 - For selecting a cooking zone (see "Switching a cooking zone off automatical-ly")
- 5 For activating/deactivating Stop&Go
- 6 For setting the power level
- 7 For switching the Booster / TwinBooster On/Off
- 8 For switching the PowerFlex cooking area on and off
- Number sensors
 For setting a minute minder / switch-off time
 For setting the power level for middle rear cooking zone (depending on model)
- 10 For switching the keeping warm function on and off

Indicator lights

- (1) Residual heat
- 12 In half hours if the minute minder setting exceeds 99 minutes

Overview

- 13 System lock/safety lock activated
- 4 For cooking zone selection, e.g. right rear cooking zone
- 15 TwinBooster activated
 - Level 1
 - Level 2

16 Timer display

00 to 99 minutes

0.h to 9.h hours

LC System lock/safety lock activated

dE Demonstration mode activated

Cooking zones

Cooking zone	Ø in cm*	Rating in watts for 230 V**	
0	15–23	TwinBooster, level 1 3	2100 3000 3650
0	15–23	TwinBooster, level 1 3	2100 3000 3650
0	14–28	TwinBooster, level 1 33	2600 3300 5500
	15–23	TwinBooster, level 1 3	2100 3000 3650
	15–23	TwinBooster, level 1	2100 3000 3650
• + • • + •	22–23 / 15x23–23x39	TwinBooster, level 1 4	3400 1800 7300
		Total: 11	000

^{*} Pans of any diameter within the given range may be used.

^{**} The wattage quoted may vary depending on the size and material of the pans used.

Before using for the first time

- Please stick the extra data plate for the appliance supplied with this documentation in the space provided in the "After sales service, data plate, quarantee" section of this booklet.
- Remove any protective wrapping and stickers.

Cleaning the hob for the first time

Before using for the first use, clean the hob with a damp cloth only and then wipe dry.

Switching on the hob for the first time

The metal components have a protective coating which may give off a slight smell when heated up for the first time. The induction coils may also give off a slight smell for the first few hours of operation. This smell will be less noticeable with each subsequent use before dissipating completely.

The smell and any vapours given off do not indicate a faulty connection or appliance and they are not hazardous to health.

Please note that the heating up time on induction hobs is very much shorter than on conventional cooktops.

Induction

The induction principle

An induction coil is located under each cooking zone. When a cooking zone is switched on, this coil creates a magnetic field which impacts directly on the base of the pan and heats it up. The cooking zone itself is heated up indirectly by the heat given off by the pan.

An induction cooking zone only works when a ferromagnetic pan is placed on it (see "Pans"). The induction cooking zone automatically recognises the size of the pan.

On the control scale of the cooking zone, power levels 1 to 9 flash:

- if the zone has been switched on without a pan in place, or if the pan is unsuitable (non-magnetic base),
- if the diameter of the base of the pan is too small,
- if the pan is taken off the cooking zone when it is switched on.

If a suitable pan is placed on the cooking zone within 3 minutes you can continue as normal.

If no pan or an unsuitable pan is placed on the cooking zone, the cooking zone will switch off automatically after 3 minutes. Mhen the appliance is switched on either deliberately or by mistake, or when there is residual heat present, there is the risk of any metal items placed on the hob (e.g. cutlery) heating up.

Danger of burning.

Do not use the hob as a resting place for items. Switch the cooking zones off after use with the appropriate sensor.

Noises

When using an induction cooking zone, the following noises can occur in the pan, depending on what it is made of and how it has been constructed.

On the higher power settings, it might buzz. This will decrease or cease altogether when the power setting is reduced.

If the pan base is made of layers of different materials (e.g. in a sandwiched base), it might emit a cracking sound.

Whistling might occur if linked zones (see "Booster") are being used at the same time, and the pans also have bases made of layers of different materials.

You might hear a clicking sound from the electronic switches, especially on lower power settings.

You might hear a whirring sound when the cooling fan switches on. It switches on to protect the electronics when the hob is being used intensively. The fan may continue to run after the appliance has been switched off.

Induction

Pans

The following pan types are suitable:

- Stainless steel with a base that can be magnetised,
- enamelled steel,
- cast iron.

The following pan types are **not suitable**:

- Stainless steel pans without a magnetic base,
- aluminium and copper pans,
- glass, ceramic or earthenware pots and pans.

To test whether a pot or pan is suitable for use on an induction hob, hold a magnet to the base of the pan. If the magnet sticks, the pan is suitable. If an unsuitable pan is used, the 1-9 power levels will flash on the control scale of the cooking zone.

The composition of the pan base can affect the evenness of the cooking results (e.g. when browning pancakes).

- To make optimum use of the cooking zones, choose pans with a suitable diameter (see "Cooking zones"). If the pan is too small it will not be recognised and the 1-9 power levels will flash on the control scale of the zone.
- Only use pots and pans with smooth bases. Rough bases will scratch the ceramic glass.
- Lift pans into position on the hob.
 Sliding them into place can cause scuffs and scratches.
- Often the maximum diameter quoted by manufacturers refers to the diameter of the top rim of the pot or pan.
 The diameter of the base (generally smaller) is more important.

Tips on saving energy

- Use a lid whenever possible to minimise heat loss.
- Select a smaller pan when cooking small quantities. A smaller pan uses less energy than a larger pan with very little in it.
- Cook with as little water as possible.
- Once food has come to the boil or the oil in the pan is hot enough for frying, reduce the heat to a lower setting.
- Use a pressure cooker to reduce cooking times.

Setting range

The hob is programmed with 9 power levels at the factory. If you wish to fine-tune a setting, you can extend the power setting range to 17 power levels (see "Programming").

	Setting range	
	Default set- ting (9 power lev- els)	Extended set- tings (17 power levels)
Keeping warm	h	h
Melting butter Dissolving gelatine Melting chocolate	1–2	1–2.
Making milk puddings	2	2–2.
Warming small quantities of liquid Cooking rice	3	3–3.
Defrosting frozen vegetables	3	2.–3
Making porridge	3	2.–3.
Warming liquid and semi-solid foods Making omelettes or lightly frying eggs Steaming fruit	4	4–4.
Cooking dumplings	4	4–5.
Steaming vegetables and fish	5	5
Defrosting and reheating frozen food	5	5–5.
Gently frying eggs (without overheating the fat)	6	5.–6.
Bringing large quantities of food to the boil, e.g. casseroles. Thickening custard and sauces, e.g. hollandaise	6–7	6.–7
Gently braising meat, fish and sausages (without overheating the fat)	6–7	6.–7.
Frying pancakes, potato fritters etc.	7	6.–7
Cooking stew	8	8–8.
Boiling large quantities of water Bringing to the boil	9	9

These settings should only be taken as a guide. The power of the induction coils will vary depending on the size and material of the pan. For this reason, it is possible that the settings will need to be adjusted slightly to suit your pans. As you use the hob, you will get to know which settings suit your pans best. When using new pans that you are not familiar with, set the power level below the one specified.

How the hob is operated

The glass ceramic hob is equipped with electronic sensor controls which react to finger contact. For safety reasons, in order to switch the hob on, the On/Off ① sensor needs to be touched for a little longer than the other sensors. A tone sounds each time a sensor is touched.

When the hob is turned off, only the symbols for the On/Off ① and System Lock/Safety Lock ① sensors are visible. When you switch on the hob, all other sensors light up. When you switch a cooking zone on, the ② sensor lights up in brightness level 2, and the ③ through ③ sensors light up in brightness level 1. When you set a power level, the ③ sensor up to the set power level light up in brightness level 2.

If the booster or keeping warm function is set, the corresponding sensor lights up in brightness level 2.

Malfunction due to dirty and/or covered sensors

If the sensors are dirty or covered this could cause them to fail to react, to activate a function or even to switch the hob off automatically (see "Safety switch-off"). Placing hot pans on the sensors/indicators can damage the electronic unit underneath.

Keep the sensors and indicators clean and do not place anything on top of them. Do not place hot pans on them.

Operation

/!\ Fire hazard.

Do not leave the hob unattended whilst it is being used.

Please note that the heating up time on induction hobs is very much shorter than on conventional hobs.

Switching on

■ Touch the ① sensor.

All of the sensors will light up. If no further entry is made, the hob will switch itself off after a few seconds for safety reasons.

Selecting/changing the power level

A cooking zone is not active if the *II* sensor is the only one lit up in the control panel.

■ To switch a cooking zone on, touch the D sensor for that cooking zone.

All sensors will light up.

■ Touch the appropriate number sensor for the power level you want.

Switching off

- To switch a cooking zone off, touch the \overline{U} sensor for that cooking zone.
- To switch off the hob and all the cooking zones, touch the () sensor.

Residual heat indicator

If a cooking zone is hot, the residual heat indicator and the D sensor will light up on the control scale after switching the zone off

The bars in the residual heat indicator will go out one after another as the cooking zones cool down. The last bar and the \mathcal{Q} sensor will go out at the same time

The residual heat indicators will flash if there is a power cut during use or while residual heat is still present or if you have opened the programming function while residual heat is still present.

/!\ Danger of burning. Do not touch the cooking zones whilst the residual heat indicators are lit up.

Setting the power level - extended setting range

■ Touch the area between the sensors.

The sensors in front of and after the interim level will light up brighter than the other sensors.

Example:

if you have set power level 7. the numbers 7 and 8 will be brighter than the other numbers.

PowerFlex cooking area

The PowerFlex cooking zones can be combined to form a PowerFlex cooking area (see "Guide to the appliance - Hob"). Settings for the linked cooking area are controlled by the front or the left PowerFlex cooking zone (depending on model).

Switching on/Switching off

■ Touch the 🗍 or 🗆 sensor.

Operation

Auto heat-up

When Auto heat-up has been activated, the cooking zone switches on automatically at the highest power setting and then switches to the continued cooking setting. The heat-up time depends on which continued cooking setting has been chosen (see chart).

Activating

Touch the sensor for the continued cooking setting you want until a tone sounds and the sensor starts to flash.

During the heat-up time (see chart), the continued cooking level set will flash. With extended power levels (see "Programming"), the power levels before and after the interim power level will flash if an extended power level setting has been selected.

Altering the continued cooking setting while the cooking zone is heating up deactivates Auto heat-up.

Deactivating

 Touch the sensor for the continued cooking setting,

or

■ select a different power level.

Continued cook- ing setting	Heat-up time [min : sec]
1	approx. 0 : 15
1.	approx. 0 : 15
2	approx. 0 : 15
2.	approx. 0 : 15
3	approx. 0 : 25
3.	approx. 0 : 25
4	approx. 0 : 50
4.	approx. 0 : 50
5	approx. 2:00
5.	approx. 5 : 50
6	approx. 5 : 50
6.	approx. 2 : 50
7	approx. 2 : 50
7.	approx. 2 : 50
8	approx. 2:50
8.	approx. 2:50
9	_

The continued cooking settings with a dot after the number are only available if the power level range has been extended (see "Programming").

Booster

The cooking zones are equipped with a Booster or TwinBooster (see "Guide to the appliance – Hob"). You can use the booster function for a maximum of two cooking zones at the same time.

When activated, the power is boosted for a maximum of 15 minutes so that large quantities can be heated quickly, e.g. when boiling water for cooking pasta.

The booster function can only be used on two cooking zones at the same time.

If the booster function is switched on when

- no power level has been selected, the cooking zone will revert automatically to level 9 at the end of the booster time or if the booster function is switched off before this.
- a power level has been selected, the cooking zone will revert automatically to the power level selected at the end of the booster time or if the booster function is switched off before this.

Cooking zones are networked in pairs to supply the power for the booster function. When the booster function is selected, a proportion of energy is taken away from the linked cooking zone and the following happens within the pairs:

- Auto heat-up is deactivated
- the power level is reduced
- the linked cooking zone is switched off.

Operation

During the booster time, the B sensor and all of the sensors on the control scale light up at brightness level 2.

To switch on the Booster

- Touch the Ū sensor for the cooking zone you wish.
- Select a power level if necessary.
- Touch the 8 sensor.

To switch on the TwinBooster, level 1

- Touch the D sensor for the cooking zone you wish.
- Select a power level if necessary.
- Touch the B sensor.

The • indicator light for TwinBooster level 1 comes on.

To switch on the TwinBooster, level 2

- Touch the ① sensor for the cooking zone you wish to use.
- Select a power level if necessary.
- Touch the B sensor twice.

The indicator light for TwinBooster level 2 comes on.

Switching off the Booster / Twin-Booster

- Touch the B sensor
- once (booster)
- repeatedly until the indicator lights go off (TwinBooster)

or

■ Select a different power level.

Keeping warm

The keeping warm function is for keeping food that has just been cooked warm, i.e. food that is still hot. It is not for reheating food that has gone cold.

If the keeping warm function has been activated, the cooking zone will switch off automatically after a maximum of 2 hours.

- Only use pots and pans for keeping food warm and cover with a lid.
- You do not have to stir food while it is being kept warm.
- Nutrients are lost when food is cooked, and continue to diminish when food is kept warm. The longer food is kept warm for, the greater the loss of nutrients. Try to ensure that food is kept warm for as short a time as possible.

Switching the keep-warm setting on/off

■ Touch the sensor for the cooking zone you wish to use.

Timer

The hob has to be switched on if you wish to use the timer.

You can set a time between 1 minute (01) and 9 hours (9.h).

The timer can be used for two different functions:

- to set the minute minder
- to set a cooking zone to switch off automatically.

A time up to 99 minutes can be set and displayed in minutes.



To set a time of more than 99 minutes, the timer must be switched to hours (h). The time is set in half-hour steps. Half-hours are indicated by a dot following the number, for example, 2 h 30 min:



Minute minder

Setting the minutes

Example: You want to set a time of 15 minutes.

- Make sure the hob is switched on.
- Touch the ④ sensor.

The - sensor flashes. 00 appears in the timer display, and the right 0 flashes.

Enter the tens first and then the units.

Touch the number sensor which corresponds to the tens position (1 in this case).

The timer display will change and *l* will start flashing on the right hand side.

■ Touch the number sensor which corresponds to the units position (5 in this case).

The timer display will change. The *1* moves to the left and 5 appears on the right.

After several seconds, the ① sensor and the timer display will light up constantly. The timer starts to count down.

Setting the hours

To set full hours, touch the respective sensor on the control scale. To set half hours, touch the space between 2 sensors on the control scale.

Example: You want to set a time of 2 hours and 30 minutes.

- Make sure the hob is switched on.
- Touch the ④ sensor.

The - sensor flashes. 00 appears in the timer display, and the right 0 flashes.

- Touch the h sensor to switch the display to hours.
- Touch the area between the 2 and 3 sensors.

After several seconds, the ① sensor and the timer display will light up constantly. The timer starts to count down.

To change a setting

- Touch the ④ sensor.
- Set the time you want, as described above.

To delete a setting

- Touch the ④ sensor.
- Touch the ② sensor on the control scale.

Timer

Switching a cooking zone off automatically

You can set a time at the end of which a cooking zone will switch off automatically. This function can be used for all the cooking zones at the same time.

If the time programmed is longer than the maximum operational time allowed, the cooking zone will switch off after the maximum time allowed (see relevant section).

- Select a power level for the cooking zone you require.
- Keep touching the sensor until the indicator light for this cooking zone starts flashing.

If several cooking zones are on, the indicator lights flash in a clockwise direction, starting with the left front.

■ Set the time you require.

If you want to set another cooking zone to switch off automatically, follow the same steps as described above.

If more than one switch-off time is programmed, the shortest time remaining will be displayed, and the corresponding indicator light will flash. The other indicator lights will light up constantly.

■ If you want to show the time remaining for another zone which is counting down in the background, touch the ⊕ sensor repeatedly until the indicator light for the zone you require flashes.

Using both timer functions at the same time

The minute minder and automatic switch-off functions can be used at the same time.

If you have programmed in one or more switch-off times, and would like to use the minute minder as well:

- Touch the ④ sensor repeatedly until the indicator lights of the programmed cooking zones light up constantly and ŪŪ appears in the timer display.
- Set the time as described above.

If you have set the minute minder and would like to programme in one or more switch-off times as well:

- Touch the ② sensor repeatedly until the indicator light for the zone you require flashes.
- Set the time as described above.

Shortly after the last entry, the timer display switches to the function with the shortest remaining time.

If you want to show the times remaining which are counting down in the background:

- Touch the sensor repeatedly until
- the indicator light for the cooking zone you want flashes (automatic switch-off).
- The timer display (minute minder) starts flashing.

Starting with the shortest time remaining which is shown in the display, all cooking zones which are switched on and the minute minder are selected clockwise.

Additional functions

Stop&Go

When Stop&Go is activated, the power of all cooking zones in use is reduced to power level 1.

The cooking zone power levels and the timer settings cannot be altered and the hob can only be switched off. A set minute minder time and the Booster time will continue to count down. Auto heat-up and automatic switch-off times set will be put on hold.

When Stop&Go is deactivated, the cooking zones will operate at the power level previously selected and the Auto heat-up and automatic switch-off times will resume running.

If the function is not deactivated within 1 hour, the hob will switch off.

Activating / Deactivating

■ Touch the II/> sensor.

Use this function when the sensors need to be cleaned quickly or there is a risk of boiling over.

System lock / Safety lock

The system lock and safety lock are deactivated if there is an interruption to the power supply.

Three-finger control is the default setting. You can change the default to one-finger control (see "Programming").

Your hob is equipped with a system lock and a safety lock to prevent the hob and the cooking zones being switched on or any settings being altered.

The **system lock** is activated when the hob is switched off. When it is activated, the hob cannot be switched on and the timer cannot be used. The hob is programmed so that the system lock must be activated manually. It can be programmed to be activated automatically 5 minutes after the hob has been switched off if the system lock is not manually activated first (see "Programming").

The **safety lock** is set when the hob is switched on. When the safety lock is activated.

- the cooking zone power levels and the timer settings cannot be changed.
- the cooking zones, the hob and the timer can be switched off, but once switched off cannot be switched on again.

If a locked sensor is touched when the safety lock or the system lock is activated, the indicator light comes on and $L\mathcal{E}$ appears in the timer display for a few seconds.

Activating

■ Touch the sensor and the sensor of both right cooking zones until LC the indicator light appears in the timer display and the safety lock indicator light comes on.

The indicator light and LC go out after a short while.

Deactivating

■ Touch the fi sensor and the Ø sensor of both right cooking zones until the LE indicator light goes out in the timer display and the safety lock indicator light goes out.

Safety features

Safety switch-off

Safety switch-off with an overlong cooking time

The safety switch-off mechanism is triggered automatically if one of the cooking zones is heated for an unusually long period of time. This period of time depends on the power level selected. Once exceeded, the cooking zone switches off and the residual heat indicators appear. The cooking zone can be operated again after it has been switched off and back on.

Safety switch-off if the sensors are covered

Your hob will turn off automatically if one or several of the sensors remain covered for longer than 10 seconds, for example, by finger contact, food boiling over or by an object such as an oven glove or tea towel. *F* flashes in the timer display and a buzzer sounds every 30 seconds for 10 minutes.

When you remove the objects or soiling, *F* goes out, the buzzer stops, and the hob is ready for use again.

Overheating protection

All the induction coils and cooling elements for the electronics are fitted with an overheating protection mechanism. Before the induction coils or cooling elements get too hot, the overheating protection mechanism cuts in in one of the following ways:

Induction coils

- Any booster function in operation will be switched off.
- The set power level will be reduced.
- The cooking zone turns off automatically. FE flashes in the timer display alternating with 44.

You can use the cooking zones again as usual when the fault message has gone out.

Cooling elements

- Any booster function in operation will be turned off.
- The set power level will be reduced.
- The cooking zones turn off automatically.

The affected cooking zones can only be used again if the cooling element has cooled down to a safe level.

The overheating protection mechanism can be triggered by:

- Heating up an empty pan.
- Fat or oil being heated on a high power level.
- Insufficient ventilation to the underside of the hob.
- A hot cooking zone being switched on after an interruption to the power supply.

If, despite removing the cause, the overheating protection mechanism triggers again, contact Miele Service.

Cleaning and care

/!\ Danger of burning.

The cooking zones must be switched off. The hob must have cooled down

/ Danger of injury.

The steam from a steam cleaning appliance could reach electrical components and cause a short circuit.

Do not use a steam cleaner to clean the hob.

The use of unsuitable cleaning agents can cause the surfaces to discolour or alter.

All surfaces are susceptible to scratching.

Remove any cleaning agent residues immediately.

Unsuitable cleaning agents

To avoid damaging the surfaces of your appliance, do not use:

- washing-up liquid,
- cleaning agents containing soda, alkalines, ammonia, acids or chlorides,
- cleaning agents containing descaling agents
- stain or rust removers.
- abrasive cleaning agents, e.g. powder cleaners and cream cleaners,
- solvent-based cleaning agents,
- dishwasher cleaner.
- grill and oven cleaners,
- glass cleaning agents,
- hard, abrasive brushes or sponges, e.g. pot scourers, or sponges which have been previously used with abrasive cleaning agents,
- melamine eraser blocks,

Cleaning and care

Do not clean the area between the glass-ceramic surface and the frame or the frame and the worktop with sharp, pointed objects.

This could damage to the seals.

Do not use washing-up liquid to clean the appliance as washing-up liquid will not remove all soiling and deposits.

It will form an invisible coating which will cause permanent discolouration of the ceramic surface.

Clean the hob regularly with a suitable ceramic hob cleaning agent.

Wipe all coarse soiling off using a damp cloth. Stubborn soiling may need to be removed with a shielded scraper blade.

Then clean the hob with Miele ceramic and stainless steel hob cleaner (see "Optional accessories") or a suitable proprietary ceramic hob cleaner applied with kitchen paper or a clean cloth. Do not apply cleaner whilst the hob is still hot, as this could result in marking. Please follow the manufacturer's instructions.

Finally wipe the hob with a damp cloth, then dry with a soft, dry cloth. Residues can burn onto the appliance the next time it is used and cause damage to the ceramic surface. Ensure that all cleaning agent residues are removed.

Spots caused by limescale, water and aluminium residues (spots with a metallic appearance) can be removed using Miele's ceramic and stainless steel hob cleaner

Danger of burning.

Protect your hands with oven gloves before using a shielded scraper blade to remove sugar, plastic or aluminium residues from the hot hob.

Should any **sugar**, **plastic or aluminium foil** spill or fall onto a hot cooking zone while it is in use, first switch off the appliance. Then carefully scrape off all the sugar, plastic or aluminium residues from the hob **immediately** whilst they are still hot, using a shielded scraper blade. Allow the appliance to cool down, and then clean as described above.

Programming

You can programme certain settings on the hob to suit your personal needs. Several settings can be changed in succession.

After starting the programming function, *P* (programme) and 5 (status) will appear in the timer display. On hobs that have 3 cooking zones, an additional display appears at the back left.

The programme is displayed in the front left and rear left cooking zone control scales.

Example:

Programme 3 = front left 3, rear left 0
Programme 14 = front left 4, rear left 1

The status is displayed in the front right control scale.

After the programming function is exited, an automatic reset is performed. It is concluded when an indicator light lights up briefly above the ① sensor. Do not turn the cooking zone on until the reset is concluded.

To access programming mode

■ With **the hob turned off**, touch the ① and ① sensors at the same time until the indicator light for the safety lock flashes.

To set a programme

- To set the **unit digits**, touch the required number on the **front left** control scale.
- To set the tens digits, touch the required number on the rear left control scale.

To set the status

■ Touch the required number on the **front right** control scale.

To save the settings

■ Touch the ① sensor until the indicators go out.

To avoid saving the settings

■ Touch the ⊕ sensor until the indicators go out.

Programming

Progra	amme ¹⁾	Status ²⁾	Settings		
P0	Demonstration mode and factory default settings		Demonstration mode on ³⁾		
	tory detault settings	S1	Demonstration mode off		
		S9	Factory default settings reinstated		
P1	Stop and Go	S0	Off		
		S1	On		
P2	Number of power levels	S0	9 power levels		
		S1	17 power levels ⁴⁾		
Р3	Induction warning tone when	S0	Off		
	there is no pan in place or the pan is unsuitable	S1	Quiet		
		S2	Medium		
		S3	Loud		
P4	Keypad tone when a sensor is	S0	Off		
	touched	S1	Quiet		
		S2	Medium		
		S3	Loud		
P5	Audible tone for the timer	S0	Off		
		S1	Quiet		
		S2	Medium		
		S3	Loud		
P6	System lock / Safety lock	S0	One-finger control with ⊕		
		S1	Three-finger control with simultaneous touching of ⊕ and the ⊕ power level of both right cooking zones		
P7	System lock	S0	System lock can only be activated manually		
		S1	System lock can be activated manually and automatically		
P8	Auto heat-up	S0	Off		
		S1	On		

Programming

Progra	nmme ¹⁾	Status ²⁾	Settings
P10	Miele@home	S0	Not available
	- only on communication-ena- bled appliances retrofitted	S1	Logged-off
	with a communication module	S2	Logged-on
P15	Buzzer tone if the sensors are	S0	Off
	covered	S1	On
P16	Sensor switch reaction speed	S0	Slow
		S1	Standard
		S2	Rapid

¹⁾ Unlisted programmes are not assigned.

²⁾ The factory setting is shown in bold.

 $^{^{3)}}$ After the hob has been switched on dE appears in the timer display for a few seconds.

⁴⁾ In the text and tables, the extended power levels are shown with a dot behind the number for better understanding.

With the aid of the following guide, minor problems can be easily corrected without contacting Miele.

If having followed the suggestions below, you still cannot resolve the problem, please contact Miele (see end of this booklet for contact details).

Danger of injury. Installation, maintenance and repairs to electrical appliances must only be carried out by a suitably qualified and competent person in strict accordance with current local and national safety regulations.

Do not open the casing of the appliance.

Repairs and other work by unqualified persons could be dangerous and Miele cannot be held liable for unauthorised work.

Problem	Cause and remedy			
The hob or cooking zones cannot be switched on.	 There is no power to the hob. Check if the mains fuse has tripped. If it has, contact a qualified electrician or Miele (minimum fuse rating - see data plate). 			
	 There may be a technical fault. Disconnect the appliance from the electricity supply for approx. 1 minute. To do this: switch off at the isolator, or disconnect the mains fuse. If, after resetting the trip switch in the mains fuse box and switching the appliance back on, the appliance will still not heat up, contact a qualified electrician or Miele. 			
A smell and vapours are given off when the new appliance is being used.	The metal components have a protective coating. When the appliance is used for the first time, this causes a smell and possibly also vapour. The material from which the induction coils are made also gives off a smell in the first few hours of operation. This smell will be less noticeable with each subsequent use before dissipating completely. The smell and any vapour given off do not indicate a faulty connection or appliance and they are not hazardous to health.			
Power levels 1 to 9 flash.	There is no pan on the cooking zone, or the pan is unsuitable. Use a suitable pan (see "Pans").			

Problem	Cause and remedy			
After the hob has been switched on LC appears in the timer display for a few seconds.	The system lock or safety lock is activated. Deactivate the system lock or safety lock (see "System lock / Safety lock").			
F flashes in the timer display and the hob switches off automatically.	One or more of the sensors are covered, e.g. by finger contact, food boiling over or an object. Clean off any dirt or remove the object (see "Safety switch-off").			
After the hob has been switched on dE appears in the timer display for a few seconds. The cooking zones do not heat up.	The hob is in demonstration mode. ■ Deactivate demo mode (see "Programming").			
A cooking zone switches off automatically.	It has been operated for too long. You can use the cooking zone again by switching it back on (see "Safety switch-off").			
A cooking zone or the whole hob switches off automatically.	The overheating protection mechanism has been activated. See "Overheating protection".			
The Booster has deactivated early automatically.	The overheating protection mechanism has been activated. See "Overheating protection".			
The cooking zone is not working in the usual way on the power setting selected.	The overheating protection mechanism has been activated. See "Overheating protection".			
Power level 9 is automatically reduced if you select power level 9 on two linked cooking zones at the same time.	Operating both zones at power level 9 would exceed the permitted maximum power for the two zones. ■ Use a different cooking zone.			

Problem	Cause and remedy			
The food in the pan does not heat up when the Auto heat-up func-	A large amount of food is being heated up.Start cooking at the highest power level and then turn down to a lower one manually later on.			
tion is switched on.	The pan is not conducting heat properly. ■ Use a different pot or pan which conducts heat properly.			
An operating noise can be heard after the appliance has been switched off.	The fan will continue running until the appliance has cooled down. It will then switch itself off automatically.			
One or more residual heat indicators are flashing.	There was an interruption to the power supply during operation or when residual heat was present.			
nasning.	You accessed the programming function while residual heat was still present.			
The sensor switches show increased sensitivity or fail to react.	 The sensitivity level of the sensor switches has changed. Make sure that there is no direct light (from the sun or from an artificial source) falling onto the hob. The area surrounding the hob must not be too dark. Make sure that there is nothing covering the sensors or the hob. Take any pans off the hob and wipe away any food deposits. Interrupt the power supply to the hob for approx. 1 minute. If the problem persists after power has been restored, please contact Miele. 			

Prol	blem	Cause and remedy			
FE	alternating with a number flashes in the timer dis- play.	FEYY The overheating protection mechanism has been activated. ■ See "Overheating protection".			
		 FE47 or FE48 The fan is blocked or defective. ■ Make sure it has not been blocked by something like a fork. Remove the cause of the blockage. ■ If this fault message continues to appear in the display, contact Miele Service. 			
		 FE and other numbers There is a fault in the electronic module. ■ Interrupt the power supply to the hob for approx. 1 minute. ■ If the problem persists after power has been restored, please contact Miele. 			

Optional accessories

Miele offer a comprehensive range of useful accessories as well as cleaning and conditioning products for your Miele appliances.

These can be ordered online at:



or from Miele (see end of this booklet for contact details).

Pans

Miele offer a wide range of pans which are perfect for Miele hobs. Please refer to the Miele website for more details on individual products.

- Pans in various sizes
- Frying pan with lid
- Anti-stick pans
- Wok
- Gourmet oven dishes

Cleaning and care products

Ceramic and stainless steel hob cleaner 250 ml



Removes heavy soiling, limescale deposits and aluminium residues

Microfibre cloth



Removes finger marks and light soiling

Miele@home / Con@ctivity

Your hob is communication enabled and can

- be integrated into the Miele@home system using an optional communication module or
- communicate with your Miele cooker hood via the **stick** supplied with your cooker hood (Con@ctivity).

Miele@home system

Communication-enabled appliances send operating status information to a master appliance (SuperVision appliance, Notebook, tablet etc.). The system also enables integration into a household bus system (Miele Gateway or QIVICON Smart Home Platform).

Con@ctivity

The hob sends information on its operating status to the cooker hood. Operation of the cooker hood occurs automatically in conjunction with the hob.

Further information regarding Miele@home and Con@ctivity is available on the internet and in the instruction manuals of the various components.

If you want to sign the hob

- on to the Miele@home system, first prepare the signing on procedure on the master (display) appliance.
- To sign on to Con@ctivity, you must first sign the cooker hood on.

Signing on the hob

■ With the hob **switched off**, touch the ① and ① sensors at the same time until the indicator light for the safety lock flashes.

In the timer display, *P* (programme) and 5 (status) appear. The programme number will be displayed to the left of the control scales and the set status to the right.

- Touch the number 1 on the **rear left** control scale (set to programme 10).
- Touch the number 2 on the **front right** control scale (set to status 2 = sign on).

The signing-on procedure starts and number 2 flashes on the front right control scale. The signing-on procedure will take a few minutes. The number 2 lights up constantly as soon as the procedure has been completed successfully.

- To save the setting, touch the ① sensor until the displays go out.
- Finish signing on the cooker hood/ master appliance (see the relevant instructions).

Signing off the hob

If you would light to sign off the hob from Miele@home, first carry out the signing-off procedure on the display device.

■ With **the hob turned off**, touch the ① and ① sensors at the same time until the indicator light for the safety lock flashes.

In the timer display, *P* (programme) and 5 (status) appear. The programme number will be displayed to the left of the control scales and the set status to the right.

- Touch the number 1 on the **rear left** control scale (set to programme 10).
- Touch number 1 on the right front control scale (set Status 1 = signingon).

The signing-off procedure starts and number 1 flashes on the right front of the control scale. The signing-off procedure will take a few minutes. The number 1 lights up constantly as soon as the procedure has been completed successfully.

■ To save the setting, touch the ① sensor until the displays go out.

Safety instructions for installation


The appliance must only be installed and connected to the electricity supply by a suitably qualified and competent person in strict accordance with current national and local safety regulations.

Fit the wall units and cooker hood before fitting the hob to avoid damaging the hob.

- The veneer or laminate coatings of worktops (or adjacent kitchen units) must be treated with 100 °C heat-resistant adhesive which will not dissolve or distort. Any backmoulds must be of heat-resistant material.
- The hob must not be installed over a fridge, fridge-freezer, freezer, dishwasher, washing machine, washer-dryer or tumble dryer.
- This hob must not be installed above ovens or cookers unless these have a built-in cooling down fan.
- After installation, ensure that nothing can come into contact with the connection cable and that it is without hindrance.
- ► The electrical cable may not come into contact with any moving kitchen component (e.g. a drawer) or be subject to mechanical obstruction which could damage it.
- Observe carefully the safety clearances listed on the following pages.

All dimensions are given in mm.

Safety distance above the hob



A minimum safety distance must be maintained between the appliance and the cooker hood above it. See the cooker hood manufacturer's operating and installation instructions for details. If the manufacturer's instructions are not available for the cooker hood, a minimum safety distance of at least 760 mm must be maintained. For any flammable objects (e.g. utensil rails, wall units etc) a minimum safety distance of at least 760 mm must be maintained between them and the appliance below.


When two or more appliances which have different safety distances are installed together below a cooker hood, you should observe the greatest safety distance.

Safety distances

Safety distances to the sides and back of the hob

Ideally the hob should be installed with plenty of space on either side. There may be a wall at the rear or a tall unit or wall on one side (right **or** left) (see illustrations).

- ① Minimum distance between the **back** of the worktop cut-out and the rear edge of the worktop:
 50 mm
- ② Minimum distance between the worktop cut-out and a wall or tall unit to the **right** of it: 50 mm.
- ③ Minimum distance between the worktop cut-out and a wall or tall unit to the left of it:
 50 mm.

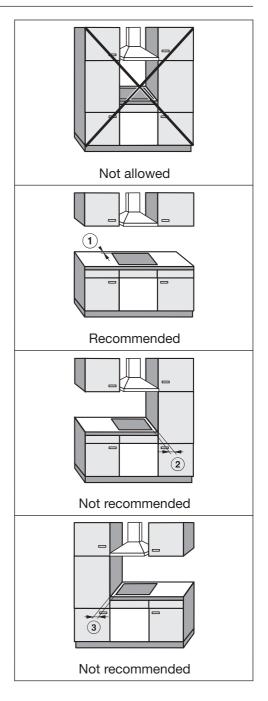

Safety distances

Minimum safety distances underneath the hob

To ensure sufficient ventilation to the hob, a certain gap must be left between the underside of the hob and any oven, interim shelf or drawer.

The minimum gap between the underside of the hob and

- the top of an oven is 15 mm.
- the top of an interim shelf is 15 mm.
- the base of a drawer is 75 mm.

Interim shelf

It is not necessary to fit an interim shelf underneath the hob but one may be fitted if you wish.

Leave a gap of 10 mm at the back of the shelf to accommodate the cable. We recommend a gap at the front of the shelf of 20 mm to ensure good ventilation.

Safety distances

Safety distance when installing the appliance near a wall with additional niche cladding

A minimum safety distance must be maintained between the worktop cut-out and any niche cladding to protect it from heat damage.


If the niche cladding is made from a combustible material (e.g. wood) a minimum safety distance 5 of 50 mm must be maintained between the cut-out and the cladding.

If the niche cladding is made from a non-combustible material (e.g. metal, natural stone, ceramic tiles) the minimum safety distance (§) between the cut-out and the cladding will be 50 mm less the thickness of the cladding.


Example: 15 mm niche cladding

50 mm - 15 mm = minimum safety distance of 35 mm

Flush-fitted hobs

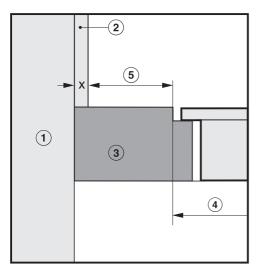

Hob with frame or bevelled edge

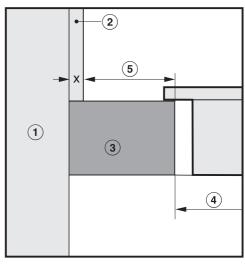


- 1 Masonry
- ② Niche cladding dimension x =thickness of the niche cladding material
- 3 Worktop
- 4 Worktop cut-out
- Minimum distance to combustible materials 50 mm non-combustible materials 50 mm - dimension x

Hob with frame or bevelled edge

Installation notes


Seal between the hob and the worktop

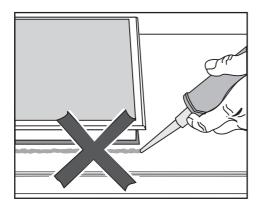

Do not use sealant between the hob and the worktop. This could result in damage to the hob or the worktop if the hob ever needs to be removed for servicing.

The sealing strip under the edge of the top part of the appliance provides a sufficient seal for the worktop.

Tiled worktop




Grout lines ① and the hatched area underneath the hob frame must be smooth and even. If they are not the hob will not sit flush with the worktop and the sealing strip underneath the hob will not provide a good seal between the hob and the worktop.

Hob with frame or bevelled edge

Building-in dimensions

KM 6388

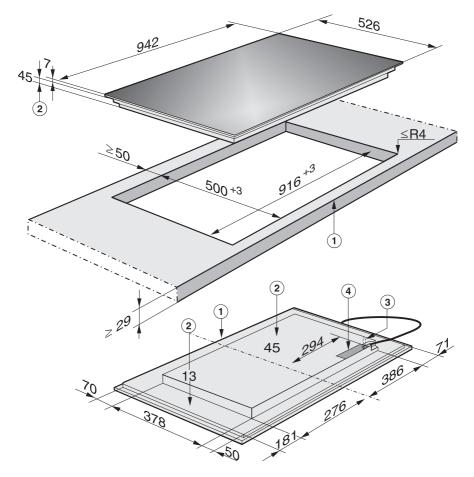

- 1 Front
- 2 Casing depth
- 3 Connection socket for wireless stick
- 4 Mains connection box

The mains connection cable (1440 mm long) is supplied separately with the hob.

Hob with frame or bevelled edge

Installation

Preparing the worktop

- Make the worktop cut-out as shown in the building-in diagram. Observe the safety distances (see "Safety distances").
- Seal the cut surfaces with a suitable sealant to avoid swelling caused by moisture. The sealant must be heatresistant.

Make sure that the sealant does not come into contact with the top of the worktop.

The seal underneath the hob will hold it securely in the cut-out. Any gap between the frame and worktop will reduce with time.

Connecting the mains connection cable to the appliance

The mains connection cable must only be connected by a suitably qualified and competent person.

 Follow the instructions in the wiring diagram (see "Electrical connection -Wiring diagram").

Installing the hob

- Feed the mains connection cable down through the cut-out.
- Place the hob centrally in the cut-out. When doing this, make sure that the seal under the hob sits flush with the worktop on all sides. This is important to ensure an effective seal all round.

Do not use sealant (e.g. silicone).

If the seal does not meet the worktop correctly on the corners, the corner radius (≤ R4) can be carefully scribed to suit.

- Connect the hob to the mains.
- Check that the hob works.

Flush-fitted hobs

Installation notes

Flush fit hobs are only suitable for installation in natural stone (granite, marble), tiled or solid wood worktops. Certain models are suitable for building into glass worktops - please see advice under "Building-in dimensions". When using a worktop made from any other material, please check first with the worktop manufacturer that it is suitable for installing a flush fit hob.


The internal width of the base unit must be at least as wide as the internal cut-out width for the hob (see "Building-in dimensions"). This is to ensure that the casing can be easily removed for maintenance. If the underside of the hob is not freely accessible after installation, any sealant used to plug the gaps around the appliance must be removed to enable the hob to be lifted out of the cut-out should this be necessary.

The hob can be installed

- in a suitable cut-out in a natural stone worktop.
- in a suitable cut-out in a tiled or solid wood worktop or a glass worktop with a wooden support frame. The frame must be provided on site, and is not supplied with the appliance.

Building-in dimensions

KM 6389

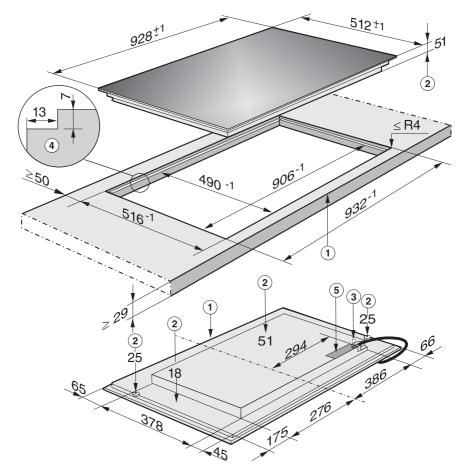

- 1 Front
- ② Casing depth
- 3 Miele@home/Con@ctivity connection
- 4 Stepped cut-out for natural stone worktops
- Mains connection box


The mains connection cable (1440 mm long) is supplied separately with the hob.

Please observe the detailed diagrams for cut-out dimensions in natural stone worktops.

Flush-fitted hobs


Installation

Natural stone worktops




- 1 Worktop
- ² Hob
- 3 Gap

As the ceramic glass and the worktop cut-out have a certain dimensional tolerance, the size of gap ③ can vary (min. 1 mm).

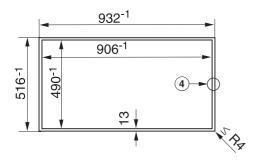

4 Stepped cut-out

Solid wood, tiled and glass worktops

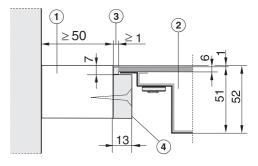

- 1 Worktop
- ² Hob
- **3** Gap
- 4 Wooden frame 13 mm (to be provided on site)

As the ceramic glass and the worktop cut-out have a certain dimensional tolerance, the size of gap ③ can vary (min. 1 mm).

Preparing the worktop

- Make the worktop cut-out as shown in "Building-in dimensions". Observe the safety distances (see "Safety distances").
- Solid wood, tiled and glass worktops: Fix the wooden frame ④ 7 mm below the top edge of the worktop (see diagram).

Connecting the mains connection cable to the appliance

The mains connection cable must only be connected by a suitably qualified and competent person.

Follow the instructions in the wiring diagram (see "Electrical connection -Wiring diagram").

Installing the hob

- Feed the mains connection cable down through the cut-out.
- Centre the hob in the cut-out.
- Connect the hob to the mains.
- Check that the hob works.
- Seal the remaining gap ③ with a silicone sealant that is heat-resistant to at least 160°C.

For natural stone worktops and natural stone tiles, only use silicone sealant that is specially formulated for natural stone, and observe the sealant manufacturer's instructions.

Electrical connection

① Danger of injury.

Miele cannot be held liable for unauthorised installation, maintenance and repair work as this can be dangerous to users.

Miele cannot be held liable for damage or injury caused by incorrect installation, maintenance or repair work, or by an inadequate or faulty earthing system (e.g. electric shock).

This hob must be connected to the mains electrical supply by a suitably qualified and competent person, in accordance with current local and national safety regulations (BS 7671 in the UK).

After installation ensure that all electrical components are shielded and cannot be accessed by users.

Connection

AC 230 V, 50 Hz

The connection data is quoted on the dataplate. It must match the household supply.

Please see wiring diagram for connection. (N.B. This appliance is supplied single phase only in the UK / AUS / NZ).

Residual current device

For extra safety, it is advisable to protect the appliance with a suitable residual current device (RCD) with a trip range of 30 mA.

Separators

The appliance must be able to be disconnected from the mains on all poles by disconnecting devices. When switched off there must be an all-pole contact gap of at least 3 mm in the isolator switch. Disconnecting devices include overcurrent protection and circuit breakers.

Electrical connection

Disconnecting from the mains

① Danger of electrical shock.

After disconnection, ensure the appliance cannot be switched back on by mistake.

To disconnect the appliance from the mains power supply, do one of the following depending on installation:

Safety fuses

■ Completely remove fuses

Automatic circuit breakers

Press the (red) button until the middle (black) button springs out.

Built-in circuit breakers

Circuit breakers, type B or C: switch the on-off switch from 1 (on) to 0 (off).

Residual current device (RCD)

Switch the main switch from 1 (on) to 0 (off) or press the test button.

Mains connection cable

The hob must be connected to the electrical supply with a special connection cable, type H 05 VV-F (PVC insulated) with a suitable diameter.

Please see wiring diagram for connection. (N.B. This appliance is supplied single phase only in the UK / AUS / NZ).

See the data plate on the hob for the correct voltage and frequency.

Connecting the mains cable

Danger of electrical shock.

The mains connection cable must be fitted by a suitably qualified and competent person in accordance with current local and national safety regulations.

The wires in the mains cable are coloured in accordance with the following code:

Green/yellow = earth

Blue = neutral

Brown = live


The earth lead must be connected to the point marked \bigoplus .

If the mains cable needs to be replaced it must be replaced with a special connection cable, type H 05 VV-F (PVC-insulated), available from Miele.

The connection data is quoted on the data plate.

Electrical connection

Wiring diagram

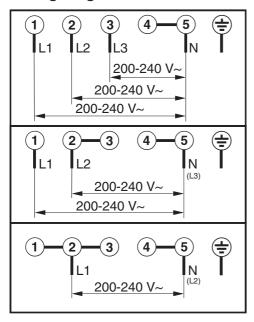

After sales service, data plate, guarantee

After sales service

ln	the	event	of	any	faults	which	you	cannot	easily	remedy,	please	contact

- your Miele Dealer, or
- Miele

See end of this booklet for contact details.

When contacting your Dealer or Miele, please quote the model and serial number of your appliance.

Space in which to stick the extra data plate supplied with the appliance. Ensure

Data plate

that t	the model	number is	s the sam	ie as the	one on t	he back	page of t	hese ins	struc-

United Kingdom

Miele Co. Ltd.

Fairacres, Marcham Road Abingdon, Oxon, OX14 1TW

Customer Contact Centre Tel: 0330 160 6600

E-mail: mielecare@miele.co.uk Internet: www.miele.co.uk

Australia

Miele Australia Pty. Ltd. ACN 005 635 398 ABN 96 005 635 398

1 Gilbert Park Drive, Knoxfield, VIC 3180

Tel: 1300 464 353

Internet: www.miele.com.au

China

Miele (Shanghai) Trading Ltd. 1-3 Floor, No. 82 Shi Men Yi Road Jing' an District

200040 Shanghai, PRC

Tel: +86 21 6157 3500, Fax: +86 21 6157 3511 E-mail: info@miele.cn, Internet: www.miele.cn

Miele (Hong Kong) Limited

41/F - 4101, Manhattan Place 23 Wang Tai Road Kowloon Bay, Hong Kong

Tel: (852) 2610 1331, Fax: (852)2610 1013

Email: mielehk@miele.com.hk

India

Miele India Pvt. Ltd. Ground Floor, Copia Corporate Suites

Plot No. 9, Jasola New Delhi - 110025

Tel: 011-46 900 000, Fax: 011-46 900 001

E-mail: customercare@miele.in. Internet: www.miele.in

Ireland

Miele Ireland Ltd. 2024 Bianconi Avenue

Citywest Business Campus, Dublin 24 Tel: (01) 461 07 10, Fax: (01) 461 07 97 E-Mail: info@miele.ie, Internet: www.miele.ie

Manufacturer: Miele & Cie. KG

Carl-Miele-Straße 29, 33332 Gütersloh, Germany



Malaysia

Miele Sdn Bhd Suite 12-2, Level 12

Menara Sapura Kencana Petroleum Solaris Dutamas No. 1, Jalan Dutamas 1

50480 Kuala Lumpur, Malaysia Phone: +603-6209-0288 Fax: +603-6205-3768

New Zealand

Miele New Zealand Limited IRD 98 463 631 Level 2, 10 College Hill

Freemans Bay, Auckland 1011, NZ Tel: 0800 464 353

Internet: www.miele.co.nz

Singapore

Miele Pte. Ltd. 163 Penang Road # 04 - 03 Winsland House II

Singapore 238463

Tel: +65 6735 1191, Fax: +65 6735 1161

E-Mail: info@miele.com.sg Internet: www.miele.sg

South Africa

Miele (Pty) Ltd 63 Peter Place, Bryanston 2194

P.O. Box 69434, Bryanston 2021 Tel: (011) 875 9000, Fax: (011) 875 9035

E-mail: info@miele.co.za Internet: www.miele.co.za

United Arab Emirates

Miele Appliances Ltd. P.O. Box 11 47 82


Gold & Diamond Park, Sheikh Zayed Road Building 6 / Offices Nos. 6-214 to 6-220

Dubai

Tel: +971-4-341 84 44 Fax: +971-4-341 88 52 E-Mail: info@miele.ae Internet: www.miele.ae



KM 6388 / KM 6389



M.-Nr. 10 110 110 / 00