

# CE&UKCA EMC Test Report

**Project No.** : 2201C268  
**Equipment** : LCD Monitor  
**Brand Name** : AOC  
**Test Model** : \*\*Q27V5\*\*\*\*\*(\*=0-9,A-Z,a-z,+,-,/,\ or blank)  
**Series Model** : N/A  
**Applicant** : TPV Electronics (Fujian) Co., Ltd.  
**Address** : Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China  
**Date of Receipt** : Jan. 30, 2022  
**Date of Test** : Feb. 07, 2022 ~ Feb. 28, 2022  
**Issued Date** : Mar. 22, 2022  
**Report Version** : R01  
**Test Sample** : Engineering Sample No.: DG202202072  
**Standard(s)** : Please refer to Page 2.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Derek Tong

Prepared by : Derek Tong

Kang Zhang

Approved by : Kang Zhang



TESTING CERT #5123.02

Add: No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792  
People's Republic of China.  
Tel: +86-769-8318-3000  
Web: www.newbtl.com

**Standard(s)** : EN 55032:2015 / AS/NZS CISPR 32:2015 / CISPR 32:2015, Class B  
EN 55032:2015+AC:2016 / EN 55032:2015+A11:2020  
/CISPR 32:2015+COR1:2016, Class B  
EN 55032:2015+A1:2020  
/ AS/NZS CISPR 32:2015+AMD1:2020, Class B  
EN 55035:2017/ CISPR 35:2016  
EN 55035:2017+A11:2020  
IEC 61000-3-2:2014 / EN 61000-3-2:2014, Class D  
IEC 61000-3-2:2018 / EN IEC 61000-3-2:2019, Class D  
EN IEC 61000-3-2:2019+A1:2021, Class D  
IEC 61000-3-3:2013 / EN 61000-3-3:2013  
IEC 61000-3-3:2013+A1:2017 / EN 61000-3-3:2013+A1:2019

BS EN 55032:2015+A1:2020, Class B  
BS EN IEC 61000-3-2:2019+A1:2021, Class D  
BS EN 61000-3-3:2013+A1:2019  
BS EN 55035:2017+A11:2020

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>8</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>9</b>
1.1 TEST FACILITY	11
1.2 MEASUREMENT UNCERTAINTY	11
1.3 TEST ENVIRONMENT CONDITIONS	13
<b>2 . GENERAL INFORMATION</b>	<b>14</b>
2.1 GENERAL DESCRIPTION OF EUT	14
2.2 DESCRIPTION OF TEST MODES	15
2.3 EUT OPERATING CONDITIONS	17
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
2.5 DESCRIPTION OF SUPPORT UNITS	17
<b>3 . EMC EMISSION TEST- EN55032:2015</b>	<b>19</b>
3.1 RADIATED EMISSION UP TO 1 GHZ	19
3.1.1 LIMITS	19
3.1.2 MEASUREMENT INSTRUMENTS LIST	19
3.1.3 TEST PROCEDURE	20
3.1.4 DEVIATION FROM TEST STANDARD	20
3.1.5 TEST SETUP	20
3.1.6 MEASUREMENT DISTANCE	21
3.1.7 TEST RESULTS (UP TO 1 GHZ)	22
3.2 RADIATED EMISSION ABOVE 1 GHZ	24
3.2.1 LIMITS	24
3.2.2 MEASUREMENT INSTRUMENTS LIST	24
3.2.3 TEST PROCEDURE	25
3.2.4 DEVIATION FROM TEST STANDARD	25
3.2.5 TEST SETUP	25
3.2.6 MEASUREMENT DISTANCE	26
3.2.7 TEST RESULTS (ABOVE 1 GHZ)	27
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	29
3.3.1 LIMITS	29
3.3.2 MEASUREMENT INSTRUMENTS LIST	29
3.3.3 TEST PROCEDURE	29
3.3.4 DEVIATION FROM TEST STANDARD	29
3.3.5 TEST SETUP	30
3.3.6 TEST RESULTS	31
<b>4 . EMC EMISSION TEST- EN 55032:2015+A11:2020/EN 55032:2015+A1:202033</b>	
4.1 RADIATED EMISSIONS UP TO 1 GHZ	33

<b>Table of Contents</b>	<b>Page</b>
4.1.1 LIMITS	33
4.1.2 MEASUREMENT INSTRUMENTS LIST	33
4.1.3 TEST PROCEDURE	34
4.1.4 DEVIATION FROM TEST STANDARD	34
4.1.5 TEST SETUP	34
4.1.6 MEASUREMENT DISTANCE	35
4.1.7 TEST RESULTS (UP TO 1 GHZ)	36
4.2 RADIATED EMISSIONS ABOVE 1 GHZ	46
4.2.1 LIMITS	46
4.2.2 MEASUREMENT INSTRUMENTS LIST	47
4.2.3 TEST PROCEDURE	47
4.2.4 DEVIATION FROM TEST STANDARD	47
4.2.5 TEST SETUP	48
4.2.6 MEASUREMENT DISTANCE	49
4.2.7 TEST RESULTS (ABOVE 1 GHZ)	50
4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	62
4.3.1 LIMITS	62
4.3.2 MEASUREMENT INSTRUMENTS LIST	62
4.3.3 TEST PROCEDURE	62
4.3.4 TEST SETUP	63
4.3.5 TEST RESULTS	64
<b>5 . HARMONIC AND FLICKER TEST</b>	<b>72</b>
5.1 HARMONIC CURRENT EMISSIONS	72
5.1.1 LIMITS	72
5.1.2 MEASUREMENT INSTRUMENTS LIST	72
5.1.3 TEST PROCEDURE	72
5.1.4 DEVIATION FROM TEST STANDARD	72
5.1.5 TEST SETUP	72
5.1.6 TEST RESULTS	73
5.2 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST	76
5.2.1 LIMITS	76
5.2.2 MEASUREMENT INSTRUMENTS LIST	76
5.2.3 TEST PROCEDURE	76
5.2.4 DEVIATION FROM TEST STANDARD	76
5.2.5 TEST SETUP	77
5.2.6 TEST RESULTS	78
<b>6 . EMC IMMUNITY TEST</b>	<b>79</b>
6.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	79
6.2 GENERAL PERFORMANCE CRITERIA	82
6.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION	83
6.3.1 PERFORMANCE CRITERIA	83

<b>Table of Contents</b>	<b>Page</b>
<b>6.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION</b>	<b>84</b>
6.4.1 PERFORMANCE CRITERIA	84
<b>6.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)</b>	<b>85</b>
6.5.1 TEST SPECIFICATION	85
6.5.2 MEASUREMENT INSTRUMENTS	85
6.5.3 TEST PROCEDURE	85
6.5.4 DEVIATION FROM TEST STANDARD	86
6.5.5 TEST SETUP	86
6.5.6 TEST RESULTS	87
<b>6.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)</b>	<b>90</b>
6.6.1 TEST SPECIFICATION	90
6.6.2 MEASUREMENT INSTRUMENTS	90
6.6.3 TEST PROCEDURE	90
6.6.4 DEVIATION FROM TEST STANDARD	91
6.6.5 TEST SETUP	91
6.6.6 TEST RESULTS	93
<b>6.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)</b>	<b>98</b>
6.7.1 TEST SPECIFICATION	98
6.7.2 MEASUREMENT INSTRUMENTS	98
6.7.3 TEST PROCEDURE	98
6.7.4 DEVIATION FROM TEST STANDARD	98
6.7.5 TEST SETUP	99
6.7.6 TEST RESULTS	100
<b>6.8 SURGE IMMUNITY TEST</b>	<b>101</b>
6.8.1 TEST SPECIFICATION	101
6.8.2 MEASUREMENT INSTRUMENTS	101
6.8.3 TEST PROCEDURE	101
6.8.4 DEVIATION FROM TEST STANDARD	102
6.8.5 TEST SETUP	102
6.8.6 TEST RESULTS	103
<b>6.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY     FIELDS TEST (CS)</b>	<b>104</b>
6.9.1 TEST SPECIFICATION	104
6.9.2 MEASUREMENT INSTRUMENTS	104
6.9.3 TEST PROCEDURE	104
6.9.4 DEVIATION FROM TEST STANDARD	105
6.9.5 TEST SETUP	105
6.9.6 TEST RESULTS	107
<b>6.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)</b>	<b>110</b>
6.10.1 TEST SPECIFICATION	110
6.10.2 MEASUREMENT INSTRUMENTS	110
6.10.3 TEST PROCEDURE	110

<b>Table of Contents</b>	<b>Page</b>
<b>6.10.4 DEVIATION FROM TEST STANDARD</b>	<b>110</b>
<b>6.10.5 TEST SETUP</b>	<b>111</b>
<b>6.10.6 TEST RESULTS</b>	<b>112</b>
<b>6.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY</b>	
<b>TEST (DIPS)</b>	<b>113</b>
<b>6.11.1 TEST SPECIFICATION</b>	<b>113</b>
<b>6.11.2 MEASUREMENT INSTRUMENTS</b>	<b>113</b>
<b>6.11.3 TEST PROCEDURE</b>	<b>113</b>
<b>6.11.4 DEVIATION FROM TEST STANDARD</b>	<b>113</b>
<b>6.11.5 TEST SETUP</b>	<b>114</b>
<b>6.11.6 TEST RESULTS</b>	<b>115</b>
<b>7 . EUT TEST PHOTO</b>	<b>116</b>

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Mar. 15, 2022
R01	Changed the model.	Mar. 22, 2022



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission			
Standard(s)	Test Item	Result	
EN 55032:2015 / AS/NZS CISPR 32:2015 / CISPR 32:2015 EN 55032:2015+AC:2016 / EN 55032:2015+A11:2020 / CISPR 32:2015+COR1:2016 EN 55032:2015+A1:2020 / AS/NZS CISPR 32:2015+AMD1:2020 BS EN 55032:2015+A1:2020	Radiated emissions up to 1 GHz	PASS	
	Radiated emissions above 1 GHz	PASS	
	Radiated emissions from FM receivers	N/A	
	Conducted emissions AC mains power port	PASS	
	Asymmetric mode conducted emissions	AAN	N/A
		Current Probe	N/A
		CP+CVP	N/A
Conducted differential voltage emissions	N/A		

Standard(s)	Test Item	Result
IEC 61000-3-2:2014 / EN 61000-3-2:2014 IEC 61000-3-2:2018 / EN IEC 61000-3-2:2019 EN IEC 61000-3-2:2019+A1:2021 BS EN IEC 61000-3-2:2019+A1:2021	Harmonic current	PASS
IEC 61000-3-3:2013 / EN 61000-3-3:2013 IEC 61000-3-3:2013+A1:2017 / EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A1:2019	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/ CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008 EN 61000-4-2:2009	ESD	PASS
	IEC 61000-4-3:2006+A1:2007+A2:2010 EN 61000-4-3:2006+A1:2008+A2:2010	RS	PASS
	IEC 61000-4-4:2012 EN 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+A1:2017 EN 61000-4-5:2014+A1:2017	Surge	PASS
	IEC 61000-4-6:2013 EN 61000-4-6:2014+AC:2015	CS	PASS
	IEC 61000-4-8:2009 EN 61000-4-8:2010	PFMF	PASS
	IEC 61000-4-11:2004+A1:2017 EN 61000-4-11:2004+A1:2017	Dips	PASS

Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/ CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	4.2.7	Broadband impulse noise disturbances, repetitive	N/A
	4.2.7	Broadband impulse noise disturbances, isolated	N/A

## NOTE:

- (1) "N/A" denotes test is not applicable to this device.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792 People's Republic of China.

## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{cispr}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.72
		30MHz ~ 200MHz	H	4.40
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.70

### B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB08 (3m)	CISPR	1GHz ~ 6GHz	3.94

### C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C01	CISPR	150kHz ~ 30MHz	2.68

### D. Harmonic/ Flicker Measurement:

Test Site	Method	Item	U (%)
DG-C01	EN 61000-3-2	Current	0.593
	EN 61000-3-3	Voltage	0.595

## E. Immunity Measurement:

Test Site	Method	Item	U
DG-SR02	IEC 61000-4-2	Rise time tr	6.30%
		Peak current Ip	6.70%
		Current at 30 ns	6.40%
		Current at 60 ns	6.90%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.00dB
		On-ear acoustic & Acoustic measurements on loudspeakers	2.00dB
		Electrical measurements	2.00dB
DG-SR05	IEC 61000-4-4	Peak voltage (VP)	3.8%
		Rise time (tr)	4.4%
		Pulse width(tw)	4.2%
		Pulse Freq.(kHz)	0.7%
		Burst Duration(ms)	1.5%
		Burst Period(ms)	1.4%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	4.0%
		Open circuit front time (1.2/50us)	6.2%
		Open circuit time of half value (1.2/50us)	4.8%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.32dB
		EM clamp	3.14dB
		On-ear acoustic & Acoustic measurements on loudspeakers	1.34dB
		Electrical measurements	1.32dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	2.38%
DG-SR01	IEC 61000-4-11	DIP Amplitude	3.6%
		DIP Time Event	4.0%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By
Radiated emissions up to 1 GHz	23°C	59%	Farun Liang
Radiated emissions above 1 GHz	23°C	59%~60%	Ash Deng Farun Liang
Conducted emissions AC mains power port	19°C	55%	Gerry Zhao
Harmonic current	19°C	55%	Max Tan
Voltage fluctuations (Flicker)	19°C	55%	Max Tan

Test Item	Temperature	Humidity	Pressure	Tested By
ESD	16°C	53%	1017hPa	Tohru Cong
RS	20°C	58%	/	Hunter Xu
EFT	17°C	54%	/	Tohru Cong
Surge	17°C	54%	/	Tohru Cong
CS	17°C	58%	/	Ocean Ouyang
PFMF	17°C	54%	/	Tohru Cong
Dips	17°C	54%	/	Tohru Cong

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	LCD Monitor
Brand Name	AOC
Test Model	**Q27V5*****(*=0-9,A-Z,a-z,+,-,/, \ or blank)
Series Model	N/A
Model Difference(s)	Only differ in model name due to marketing purpose.
Power Source	AC Mains.
Power Rating	AC 100-240V ~ 50-60Hz 1.5A
Connecting I/O Port(s)	1* AC port 1* Earphone port 1* HDMI port 1* DP port 1* TYPE-C port 4* USB port
Classification Of EUT	Class B
Highest Internal Frequency(Fx)	302.1MHz

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
AC Power Cord	Non-shielded	NO	1.8/1.5/1.2	1.8m is worst case Detachable
HDMI	Shielded	NO	1.8/1.5/1.2	-
DP	Shielded	NO	1.8/1.5/1.2	-
TYPE-C	Shielded	NO	1.8/1.5/1.2	-

**Note:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Power cable 1.8m, 1.5m, 1.2m length, worst case is Power cable 1.8m with HDMI+DP+TYPE-C length testing and recording in test report.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TYPE-C 2560*1440/75Hz 1.8m H
Mode 2	HDMI 2560*1440/75Hz+TYPE-C LOAD 5V3A 1.8m H
Mode 3	HDMI 2560*1440/75Hz +TYPE-C R/W 1.8m H
Mode 4	HDMI 2560*1440/75Hz +TYPE-C LOAD 10V3A 1.8m H
Mode 5	DP 2560*1440/75Hz z+TYPE-C LOAD 20V3.25A 1.8m H
Mode 6	HDMI 1080P +TYPE-C LOAD 20V3.25A 1.8m H
Mode 7	TYPE-C 1280*1024/75Hz 1.8m H
Mode 8	TYPE-C 640*480/75Hz 1.8m H
Mode 9	TYPE-C 2560*1440/75Hz 1.5m H
Mode 10	TYPE-C 2560*1440/75Hz 1.2m H
Mode 11	TYPE-C 2560*1440/75Hz 1.8m H(Without Earphone)
Mode 12	TYPE-C 2560*1440/75Hz 1.8m V

Radiated emissions up to 1 GHz test	
Final Test Mode	Description
Mode 1	TYPE-C 2560*1440/75Hz 1.8m H
Mode 2	HDMI 2560*1440/75Hz+TYPE-C LOAD 5V3A 1.8m H
Mode 6	HDMI 1080P +TYPE-C LOAD 20V3.25A 1.8m H
Mode 11	TYPE-C 2560*1440/75Hz 1.8m H(Without Earphone)

Radiated emissions Above 1 GHz test	
Final Test Mode	Description
Mode 1	TYPE-C 2560*1440/75Hz 1.8m H
Mode 2	HDMI 2560*1440/75Hz+TYPE-C LOAD 5V3A 1.8m H
Mode 6	HDMI 1080P +TYPE-C LOAD 20V3.25A 1.8m H
Mode 11	TYPE-C 2560*1440/75Hz 1.8m H(Without Earphone)

Conducted emissions AC mains power port test	
Final Test Mode	Description
Mode 1	TYPE-C 2560*1440/75Hz 1.8m H
Mode 2	HDMI 2560*1440/75Hz+TYPE-C LOAD 5V3A 1.8m H
Mode 6	HDMI 1080P +TYPE-C LOAD 20V3.25A 1.8m H

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 1	TYPE-C 2560*1440/75Hz 1.8m H

Immunity Test	
Final Test Mode	Description
Mode 1	TYPE-C 2560*1440/75Hz 1.8m H
Mode 2	HDMI 2560*1440/75Hz+TYPE-C LOAD 5V3A 1.8m H
Mode 3	HDMI 2560*1440/75Hz +TYPE-C R/W 1.8m H
Mode 4	HDMI 2560*1440/75Hz +TYPE-C LOAD 10V3A 1.8m H
Mode 5	DP 2560*1440/75Hz z+TYPE-C LOAD 20V3.25A 1.8m H
Mode 6	HDMI 1080P +TYPE-C LOAD 20V3.25A 1.8m H
Mode 9	TYPE-C 2560*1440/75Hz 1.5m H
Mode 10	TYPE-C 2560*1440/75Hz 1.2m H

Evaluation description:

1. For EMI: The maximum resolution is evaluated Mode 1-6. The worst case is Mode 1 and evaluated the middle and low resolution Mode 7 and Mode 8. At last, evaluated the Mode 9 - Mode 12.
2. For radiated emission: The test data of vertical and horizontal have been re-evaluated, the horizontal is the worst case and recorded in the test report.
3. According to the client's requirement, choose Mode 1, Mode 2, Mode 6 for conducted emissions, Mode 1, Mode 2, Mode 6, Mode 11 for radiated emissions and recorded in test report.
4. RS Acoudtic: The Front, Rear, Left and Right were evaluated. The worst placement direction is Front and recorded in this report.




### 2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to PC via HDMI & TYPE-C & DP cable.
2. Mouse and Keyboard connected to PC via USB cable.
3. EUT connected to Earphone via Earphone cable.
4. EUT connected to USB3.0 Hard Disks via USB cable.

### 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

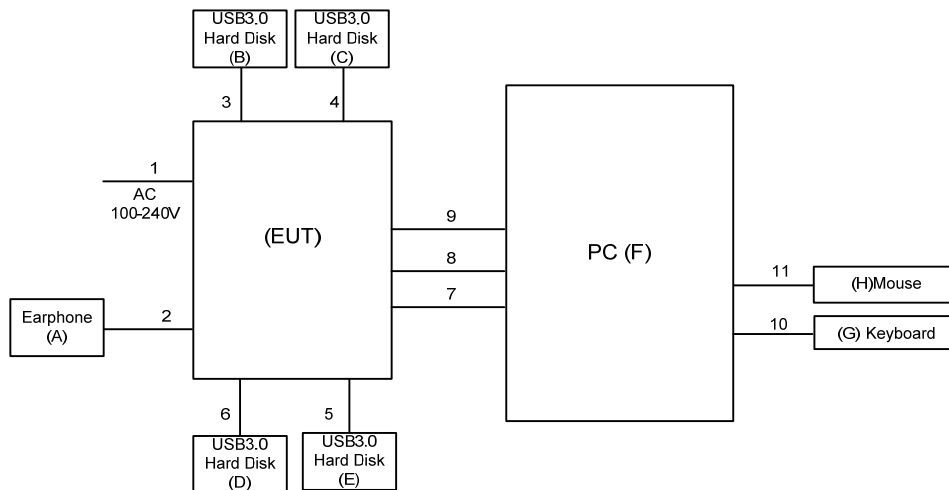

### 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Earphone	APPLE	N/A	N/A
B	USB3.0 Hard Disk	LACIE	Lacie S.A	NL33PVLS
C	USB3.0 Hard Disk	LACIE	Lacie S.A	NL34BJRF
D	USB3.0 Hard Disk	LACIE	Lacie S.A	NL34BJRF
E	USB3.0 Hard Disk	LACIE	Lacie S.A	NL33PVP7
F	PC	DELL	8920-D15N8	GZQD1L2
G	Keyboard	DELL	KB212-B	CN0HTXH97158125004DXA01
H	Mouse	DELL	MS111-P	CN011D3V71581279OLOT

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	NO	NO	1.8/1.5/1.2m
2	Earphone Cable	NO	NO	1.2m
3	USB Cable	YES	NO	1.0m
4	USB Cable	YES	NO	1.0m
5	USB Cable	YES	NO	1.0m
6	USB Cable	YES	NO	1.0m
7	HDMI Cable	YES	NO	1.8/1.5/1.2m
8	DP Cable	YES	NO	1.8/1.5/1.2m
9	TYPE-C Cable	YES	NO	1.8/1.5/1.2m
10	USB Cable	YES	NO	1.8m
11	USB Cable	YES	NO	1.8m

### 3. EMC EMISSION TEST- EN55032:2015

#### 3.1 RADIATED EMISSION UP TO 1 GHZ

##### 3.1.1 LIMITS

Class B equipment up to 1000MHz

Frequency MHz	Measurement		Class B limit dB(uV/m)
	Distance m	Detector type/bandwidth	SAC
30-230	10	Quasi peak / 120 kHz	30
230-1000			37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

##### 3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jul. 10, 2022
2	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jan. 22, 2023
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Jul. 10, 2022
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Jul. 10, 2022
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Oct. 19, 2022
6	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	946	Sep. 11, 2022
7	Cable	emci	LMR-400(5m+8m+8m)	N/A	Jan. 06, 2023
8	Cable	emci	LMR-400(5m+8m+8m)	N/A	Jan. 06, 2023
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Attenuator	EMCI	EMCI-N-6-06	AT-N0671	Sep. 11, 2022
13	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Oct. 19, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


### 3.1.3 TEST PROCEDURE

- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- g. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

### 3.1.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.1.5 TEST SETUP

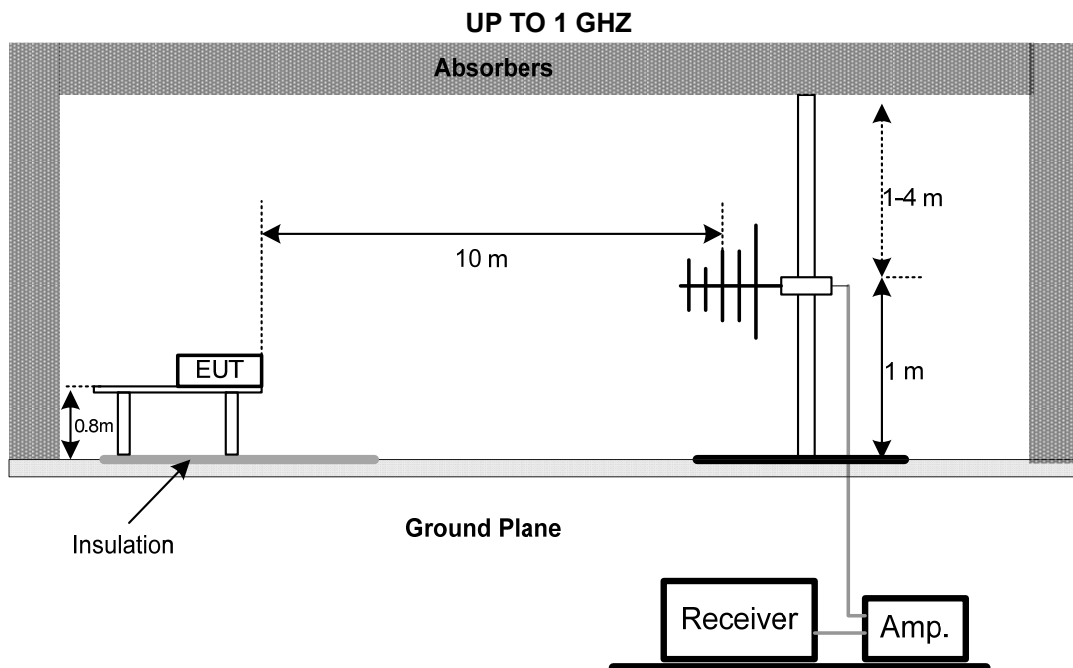


Note: The antenna can be moved between 1 to 4 meters above the ground.

**3.1.6 MEASUREMENT DISTANCE**

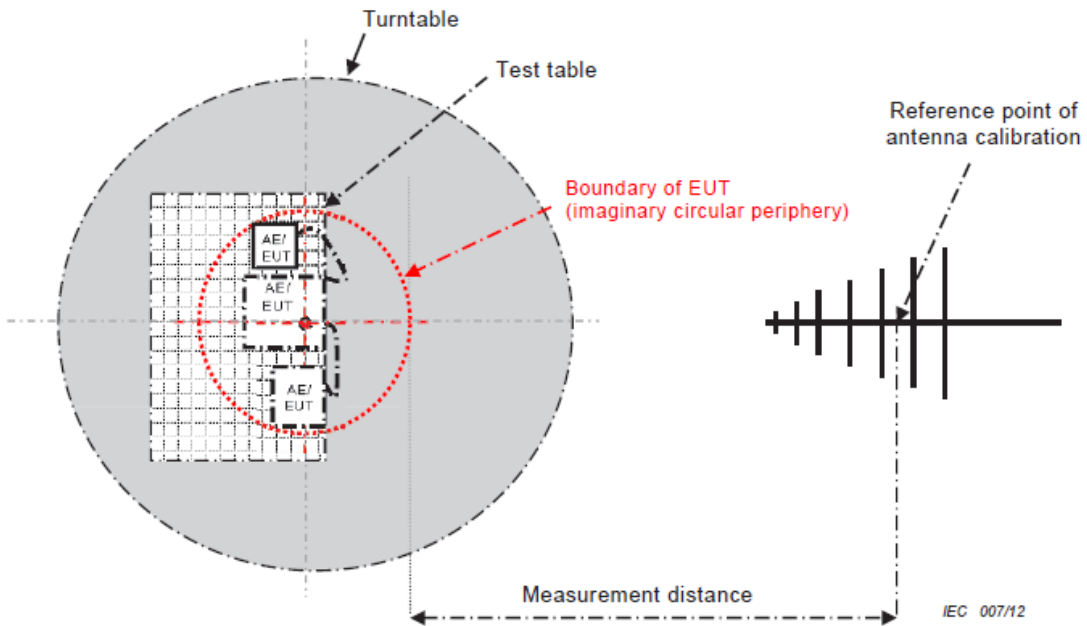

- 34 -


CISPR 32 © IEC:2012

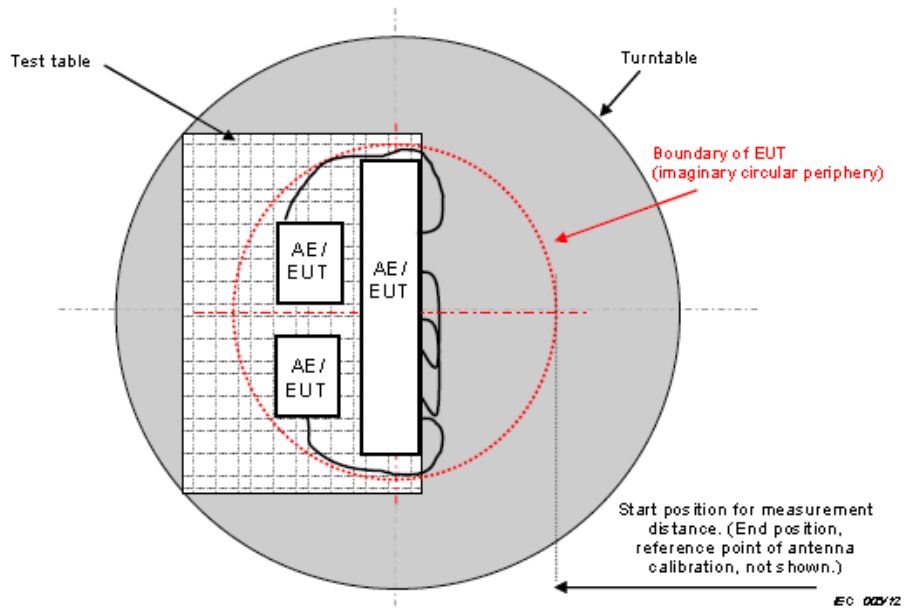

**Figure C.2 – Boundary of EUT, Local AE and associated cabling**


### 3.1.7 TEST RESULTS (UP TO 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

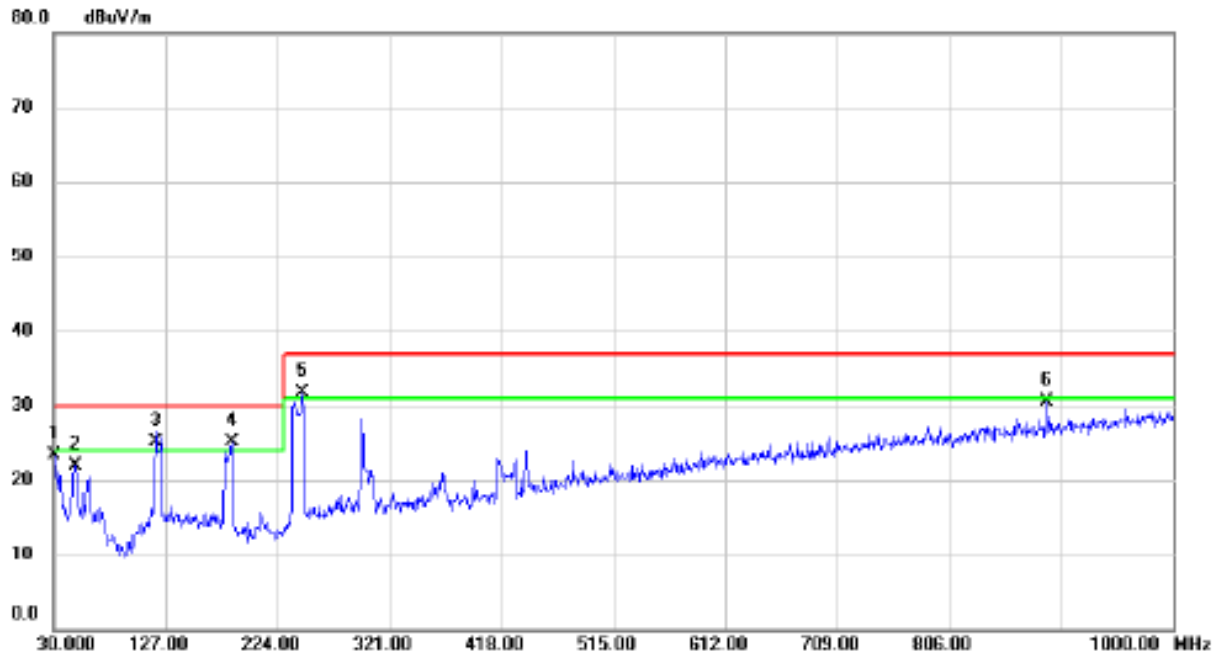

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	40.89	-17.55	23.34	30.00	-6.66	QP	
2		48.4300	39.17	-17.28	21.89	30.00	-8.11	QP	
3	!	118.2700	43.41	-18.39	25.02	30.00	-4.98	QP	
4	*	184.2300	42.75	-17.60	25.15	30.00	-4.85	QP	
5	!	245.3400	48.53	-16.87	31.66	37.00	-5.34	QP	
6		890.3900	35.37	-4.82	30.55	37.00	-6.45	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

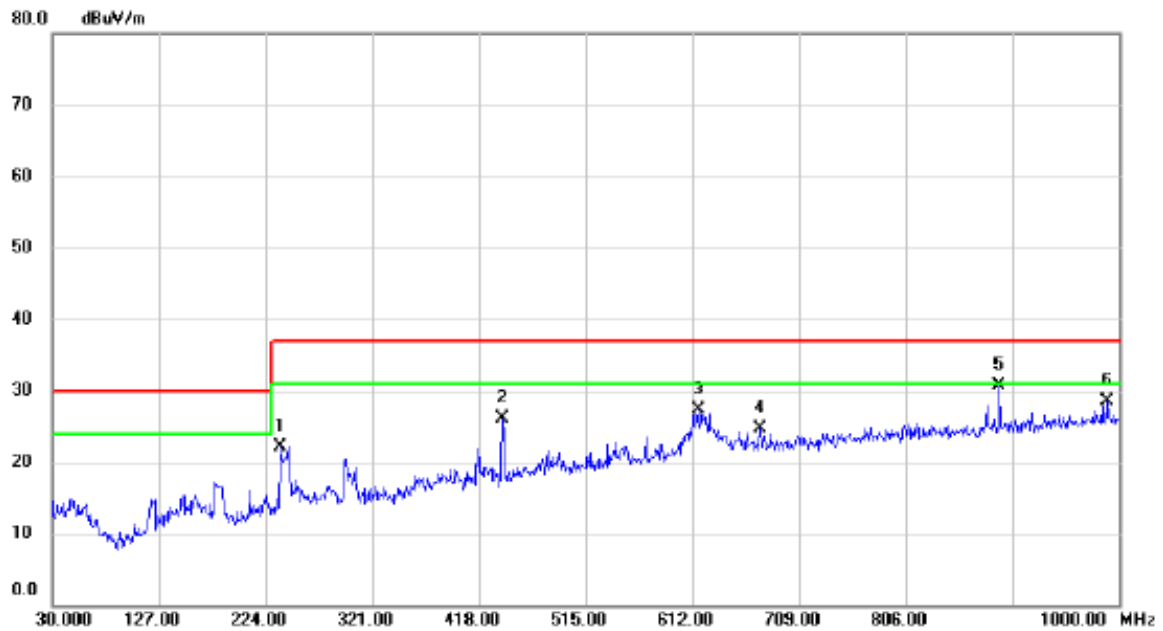

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	237.5800	38.68	-16.50	22.18	37.00	-14.82	QP	
2	439.3400	37.79	-11.63	26.16	37.00	-10.84	QP	
3	617.3350	35.75	-8.42	27.33	37.00	-9.67	QP	
4	673.1100	32.75	-7.99	24.76	37.00	-12.24	QP	
5 *	890.3900	36.80	-6.13	30.67	37.00	-6.33	QP	
6	989.3300	33.03	-4.44	28.59	37.00	-8.41	QP	

### 3.2 RADIATED EMISSION ABOVE 1 GHZ

#### 3.2.1 LIMITS

Class B equipment above 1000MHz

Frequency MHz	Measurement		Class B limit dB(uV/m)
	Distance m	Detector type/bandwidth	FSOATS
1000-3000	3	Average / 1 MHz	50
3000-6000			54
1000-3000		Peak / 1 MHz	70
3000-6000			74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency ( $F_x$ ) MHz	Highest measured frequency MHz
$F_x \leq 108$	1000
$108 < F_x \leq 500$	2000
$500 < F_x \leq 1000$	5000
$F_x > 1000$	5 <sup>th</sup> up to a maximum 6 GHz

Note for FM and TV broadcast receiver,  $F_x$  is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

#### 3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	May 26, 2022
2	Amplifier	Agilent	8449B	3008A02333	Jan. 22, 2023
3	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jan. 22, 2023
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	Micable	RWLP50-4.0A-S MSM-12M-KJ	20191107 002	Mar. 31, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.




### 3.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- f. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.


### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.2.5 TEST SETUP

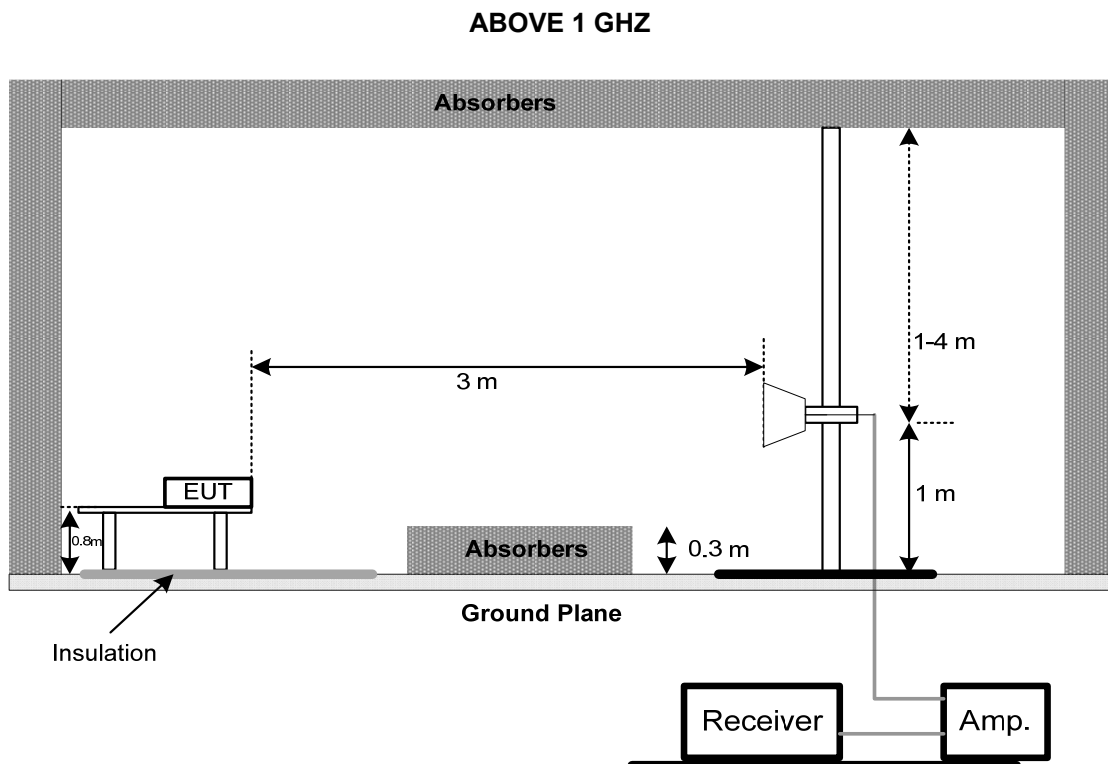

### 3.2.6 MEASUREMENT DISTANCE

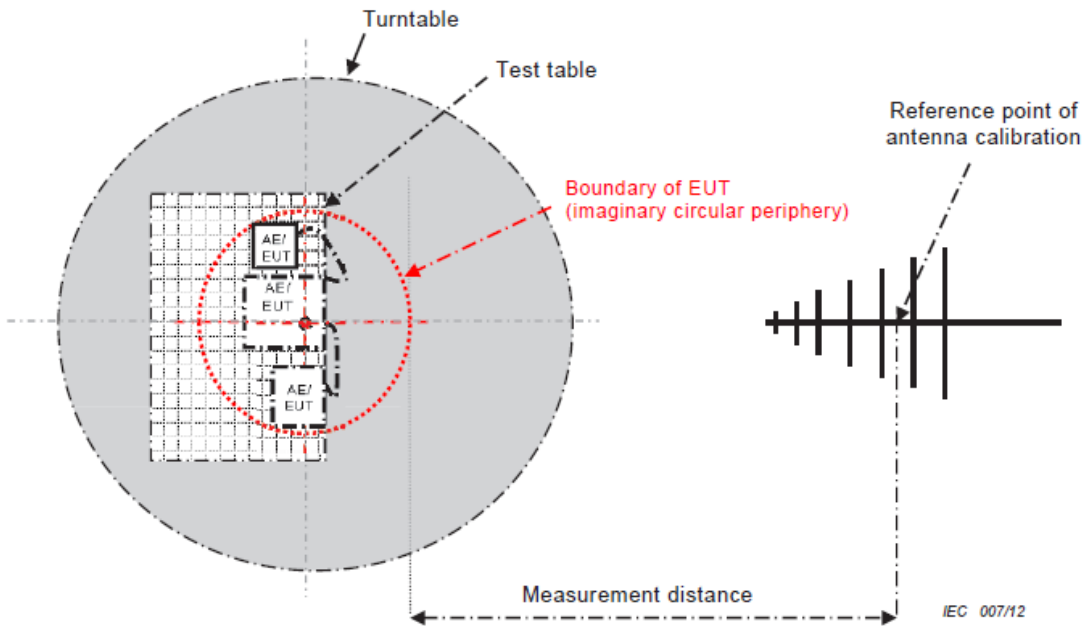

- 34 -

CISPR 32 © IEC:2012


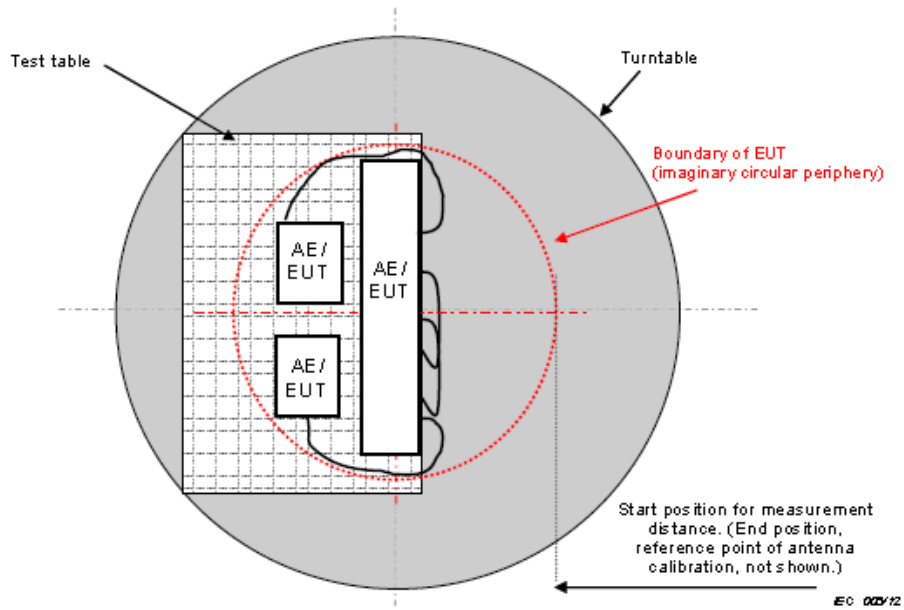


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.2.7 TEST RESULTS (ABOVE 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

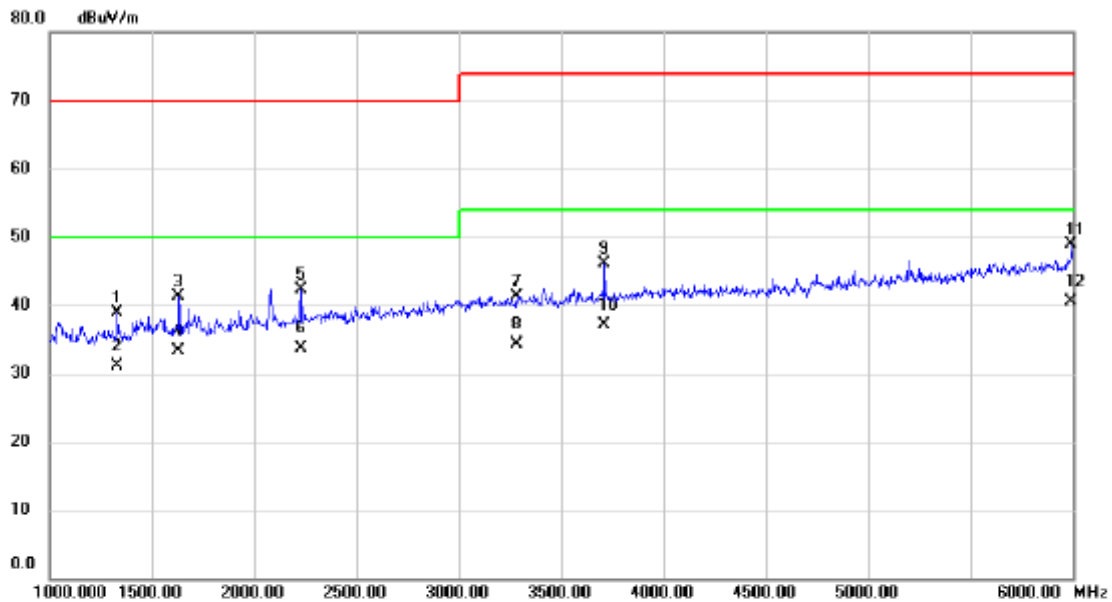

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1327.500	42.62	-3.75	38.87	70.00	-31.13	peak	
2		1327.500	34.80	-3.75	31.05	50.00	-18.95	AVG	
3		1632.500	43.33	-2.12	41.21	70.00	-28.79	peak	
4		1632.500	35.40	-2.12	33.28	50.00	-16.72	AVG	
5		2227.500	41.17	1.18	42.35	70.00	-27.65	peak	
6		2227.500	32.50	1.18	33.68	50.00	-16.32	AVG	
7		3282.500	36.00	5.31	41.31	74.00	-32.69	peak	
8		3282.500	28.90	5.31	34.21	54.00	-19.79	AVG	
9		3712.500	39.25	6.92	46.17	74.00	-27.83	peak	
10		3712.500	30.10	6.92	37.02	54.00	-16.98	AVG	
11		5992.500	34.68	14.29	48.97	74.00	-25.03	peak	
12	*	5992.500	26.30	14.29	40.59	54.00	-13.41	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

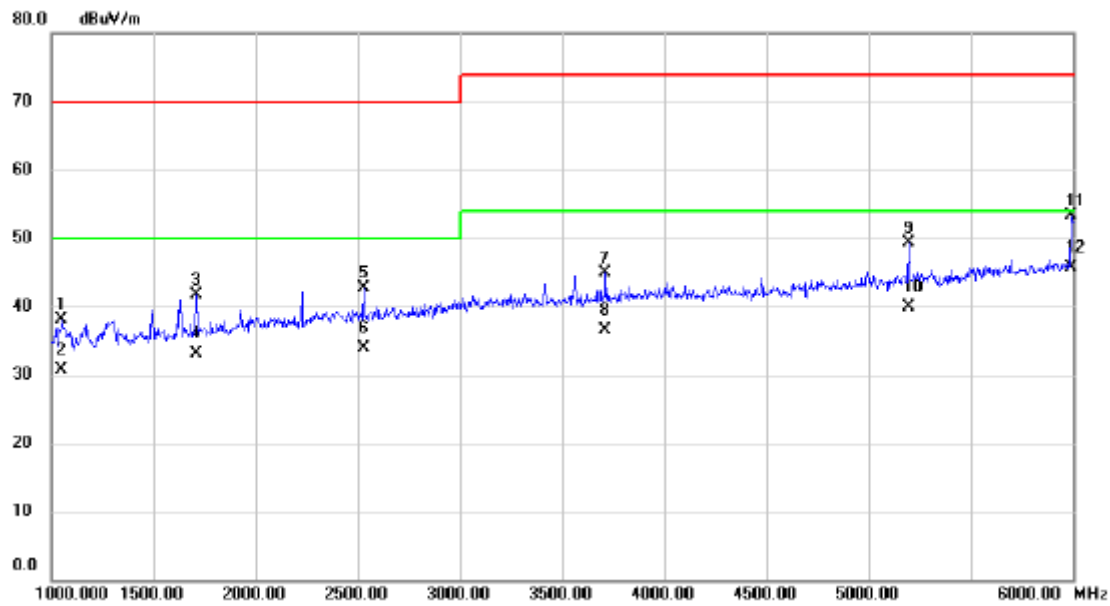

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1052.500	43.01	-4.93	38.08	70.00	-31.92	peak	
2		1052.500	35.60	-4.93	30.67	50.00	-19.33	AVG	
3		1710.000	43.31	-1.61	41.70	70.00	-28.30	peak	
4		1710.000	34.80	-1.61	33.19	50.00	-16.81	AVG	
5		2530.000	40.45	2.31	42.76	70.00	-27.24	peak	
6		2530.000	31.50	2.31	33.81	50.00	-16.19	AVG	
7		3712.500	37.98	6.92	44.90	74.00	-29.10	peak	
8		3712.500	29.60	6.92	36.52	54.00	-17.48	AVG	
9		5197.500	37.68	11.59	49.27	74.00	-24.73	peak	
10		5197.500	28.40	11.59	39.99	54.00	-14.01	AVG	
11		5992.500	39.07	14.29	53.36	74.00	-20.64	peak	
12	*	5992.500	31.50	14.29	45.79	54.00	-8.21	AVG	

### 3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

#### 3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

**NOTE:**

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100526	Jul. 10, 2022
2	EMI Test Receiver	R&S	ESR3	101862	Jan. 23, 2023
3*	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Feb. 28, 2024
4	Cable	N/A	RG400	N/A(12m)	Mar. 09, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

"\*\*" calibration period of equipment list is three year.

Except \* item, all calibration period of equipment list is one year.


#### 3.3.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.3.5 TEST SETUP

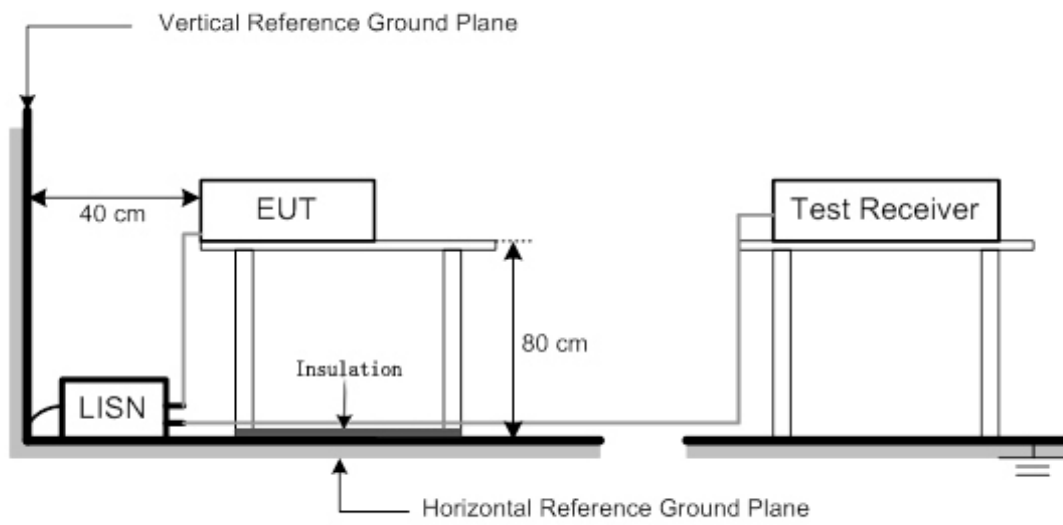


### 3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

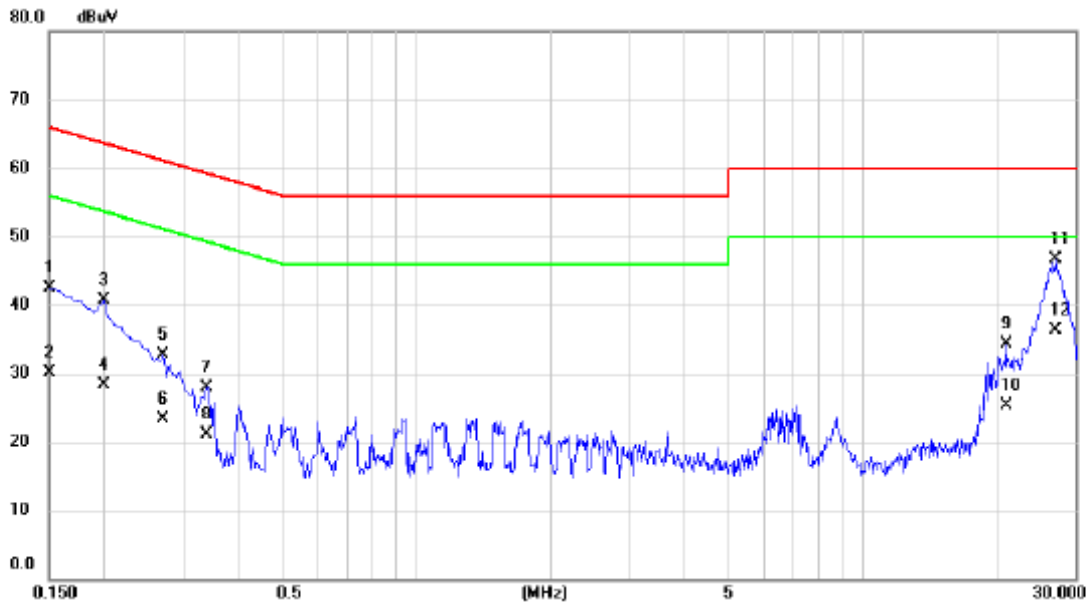

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	32.73	9.75	42.48	66.00	-23.52	QP	
2		0.1500	20.30	9.75	30.05	56.00	-25.95	AVG	
3		0.1995	30.91	9.77	40.68	63.63	-22.95	QP	
4		0.1995	18.60	9.77	28.37	53.63	-25.26	AVG	
5		0.2714	22.91	9.78	32.69	61.07	-28.38	QP	
6		0.2714	13.50	9.78	23.28	51.07	-27.79	AVG	
7		0.3390	18.18	9.78	27.96	59.23	-31.27	QP	
8		0.3390	11.40	9.78	21.18	49.23	-28.05	AVG	
9		20.9805	23.76	10.55	34.31	60.00	-25.69	QP	
10		20.9805	14.80	10.55	25.35	50.00	-24.65	AVG	
11	*	27.1320	36.01	10.75	46.76	60.00	-13.24	QP	
12		27.1320	25.60	10.75	36.35	50.00	-13.65	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

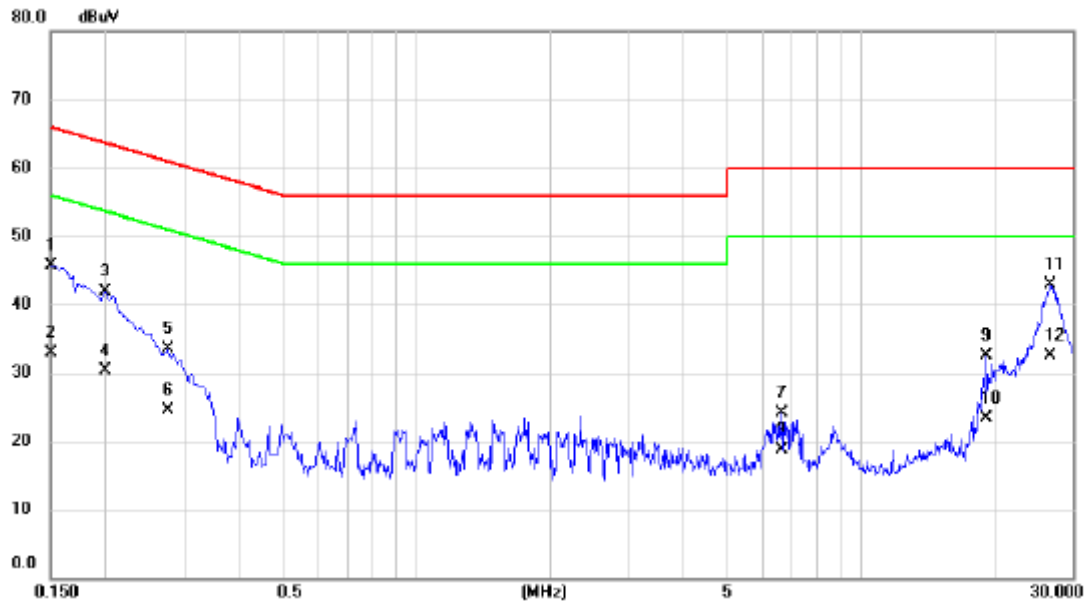

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.92	9.79	45.71	66.00	-20.29	QP	
2		0.1500	23.20	9.79	32.99	56.00	-23.01	AVG	
3		0.1995	32.04	9.80	41.84	63.63	-21.79	QP	
4		0.1995	20.50	9.80	30.30	53.63	-23.33	AVG	
5		0.2760	23.60	9.83	33.43	60.94	-27.51	QP	
6		0.2760	14.60	9.83	24.43	50.94	-26.51	AVG	
7		6.6435	13.81	10.30	24.11	60.00	-35.89	QP	
8		6.6435	8.50	10.30	18.80	50.00	-31.20	AVG	
9		19.1805	21.94	10.57	32.51	60.00	-27.49	QP	
10		19.1805	12.80	10.57	23.37	50.00	-26.63	AVG	
11	*	26.7405	32.05	10.82	42.87	60.00	-17.13	QP	
12		26.7405	21.70	10.82	32.52	50.00	-17.48	AVG	



#### 4. EMC EMISSION TEST- EN 55032:2015+A11:2020/EN 55032:2015+A1:2020

##### 4.1 RADIATED EMISSIONS UP TO 1 GHZ

###### 4.1.1 LIMITS

Class B equipment up to 1000MHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

###### 4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jul. 10, 2022
2	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jan. 22, 2023
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Jul. 10, 2022
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Jul. 10, 2022
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Oct. 19, 2022
6	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	946	Sep. 11, 2022
7	Cable	emci	LMR-400(5m+8m+8m)	N/A	Jan. 06, 2023
8	Cable	emci	LMR-400(5m+8m+8m)	N/A	Jan. 06, 2023
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Attenuator	EMCI	EMCI-N-6-06	AT-N0671	Sep. 11, 2022
13	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Oct. 19, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- For the actual test configuration, please refer to the related Item - Block Diagram of system tested.


#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

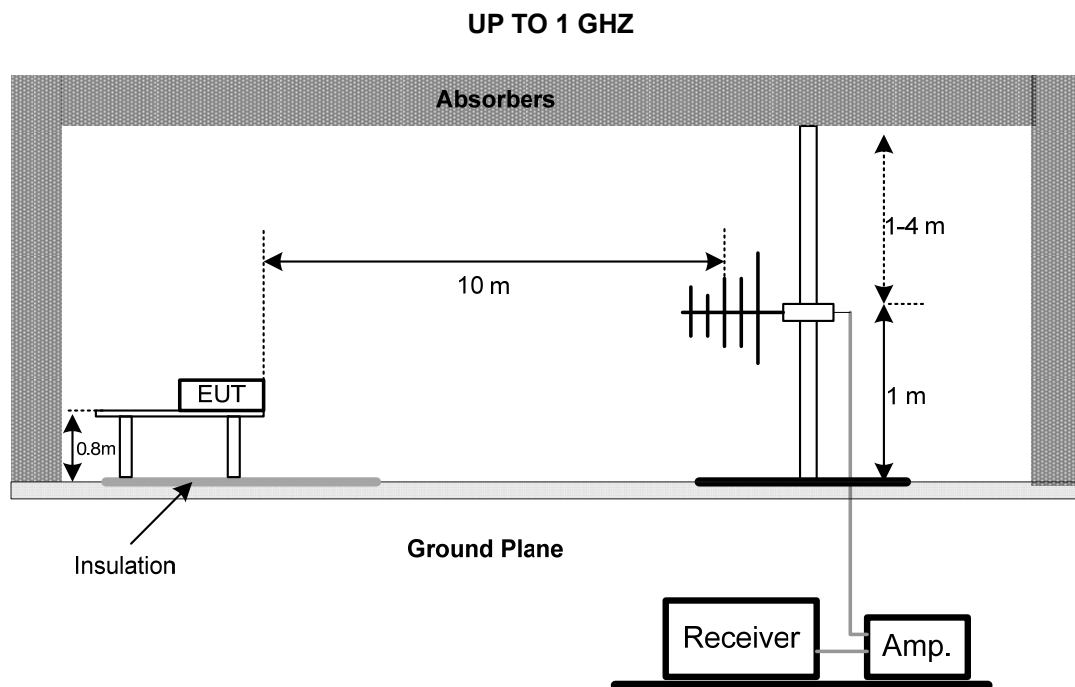


## 4.1.6 MEASUREMENT DISTANCE

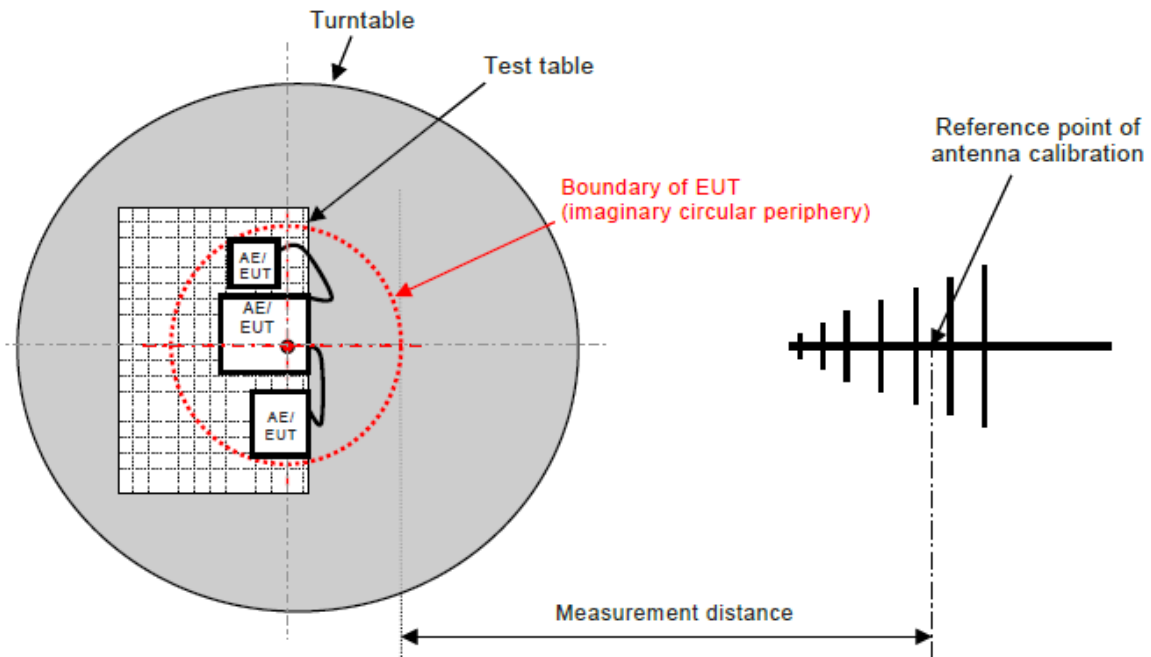

IEC

Figure C.1 – Measurement distance

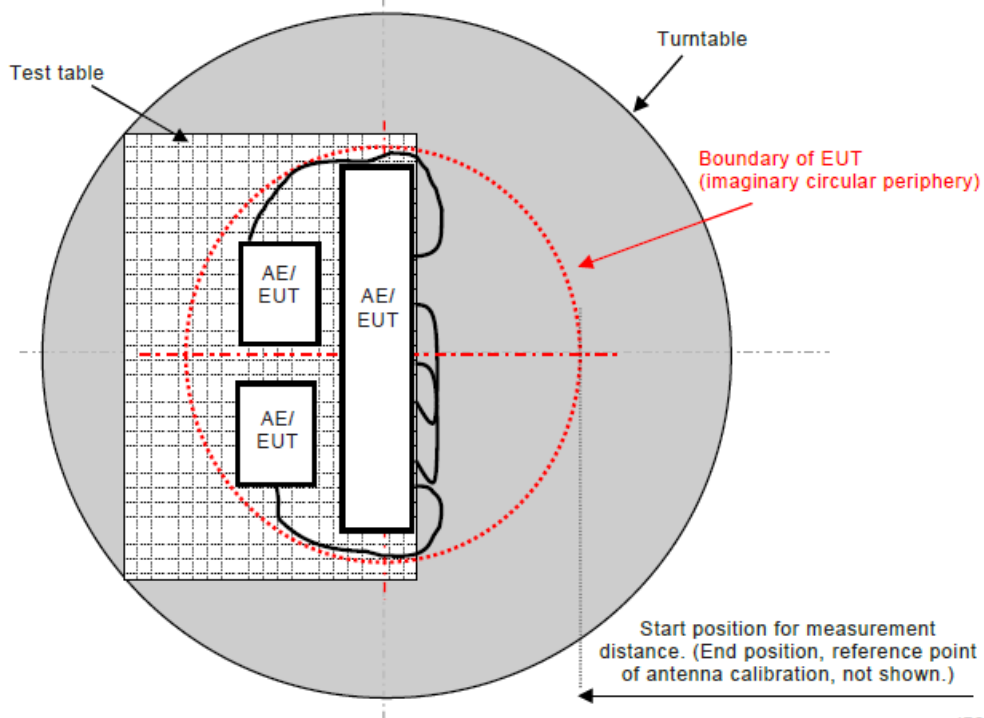


IEC

Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 4.1.7 TEST RESULTS (UP TO 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

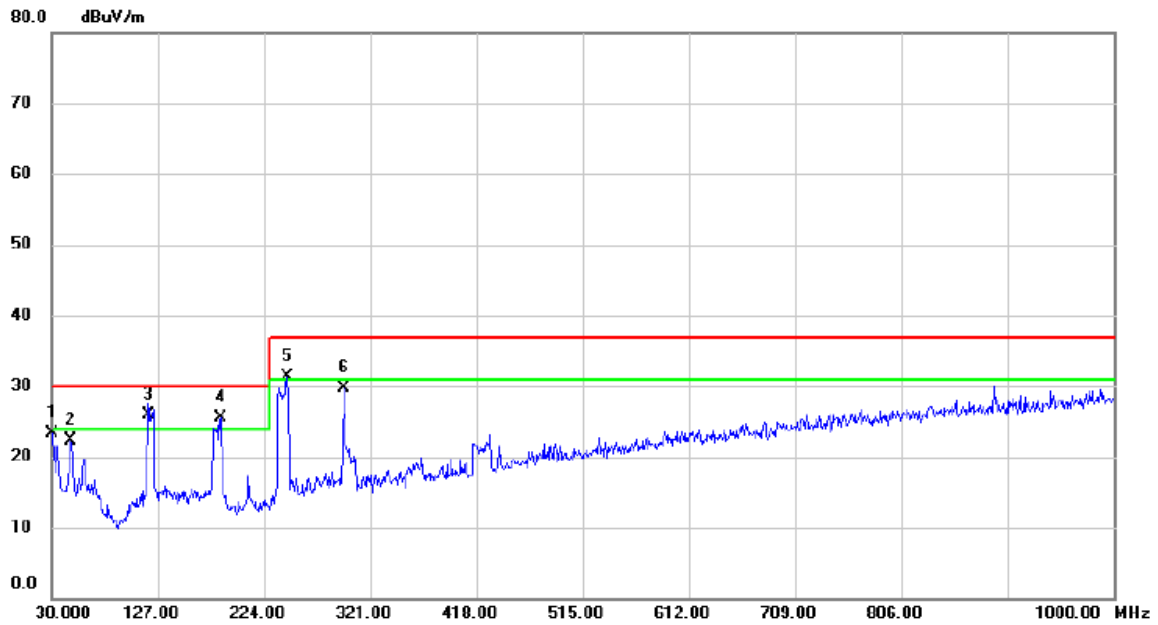


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	40.87	-17.55	23.32	30.00	-6.68	QP	
2		47.4600	39.61	-17.32	22.29	30.00	-7.71	QP	
3	*	118.2700	44.28	-18.39	25.89	30.00	-4.11	QP	
4	!	184.2300	43.01	-17.60	25.41	30.00	-4.59	QP	
5	!	245.3400	48.21	-16.87	31.34	37.00	-5.66	QP	
6		296.7500	44.57	-14.85	29.72	37.00	-7.28	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

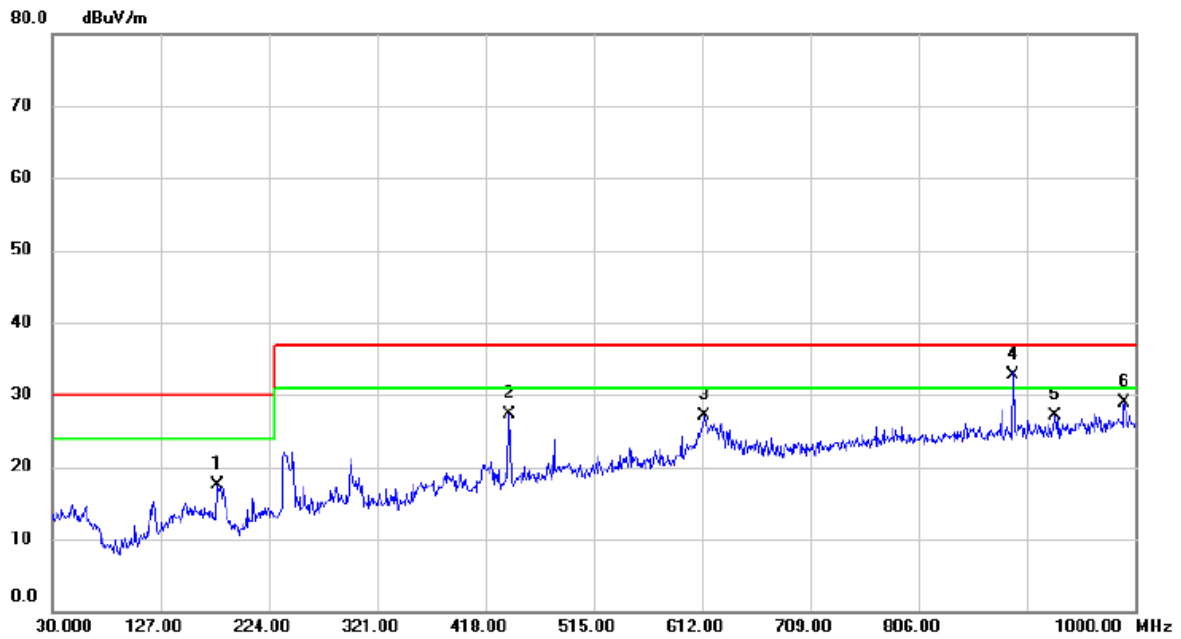


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		178.4100	34.80	-17.24	17.56	30.00	-12.44	QP	
2		439.3400	38.87	-11.63	27.24	37.00	-9.76	QP	
3		614.4250	35.64	-8.47	27.17	37.00	-9.83	QP	
4	*	890.3900	38.78	-6.13	32.65	37.00	-4.35	QP	
5		928.2200	32.80	-5.68	27.12	37.00	-9.88	QP	
6		990.3000	33.40	-4.42	28.98	37.00	-8.02	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

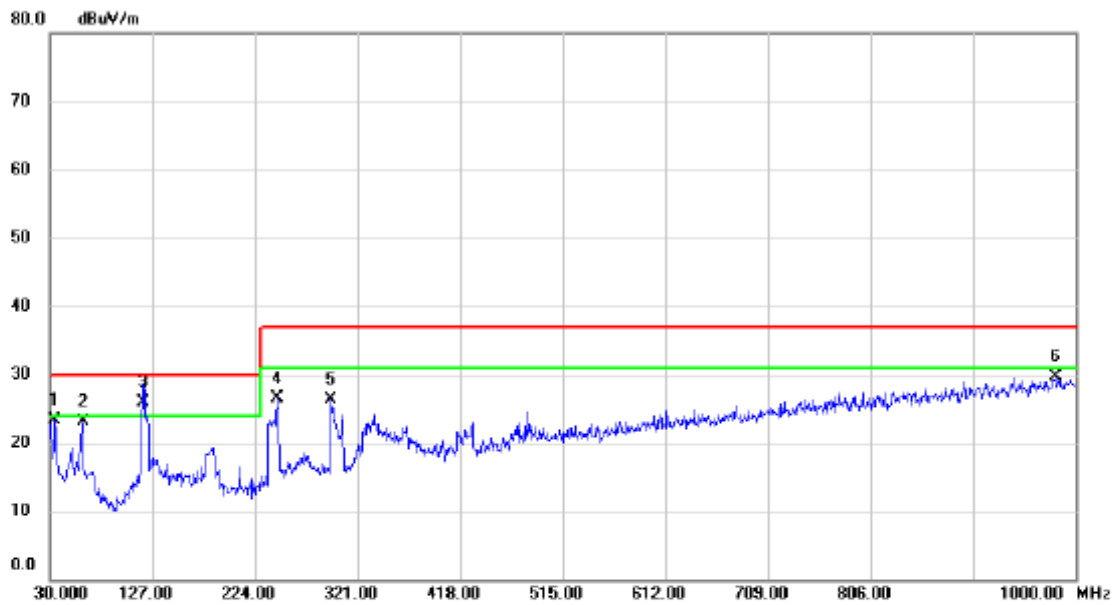


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		34.8500	41.13	-17.87	23.26	30.00	-6.74	QP	
2		61.0400	40.62	-17.51	23.11	30.00	-6.89	QP	
3	*	118.2700	44.26	-18.39	25.87	30.00	-4.13	QP	
4		245.3400	43.31	-16.87	26.44	37.00	-10.56	QP	
5		295.7800	41.28	-14.88	26.40	37.00	-10.60	QP	
6		980.6000	33.20	-3.53	29.67	37.00	-7.33	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

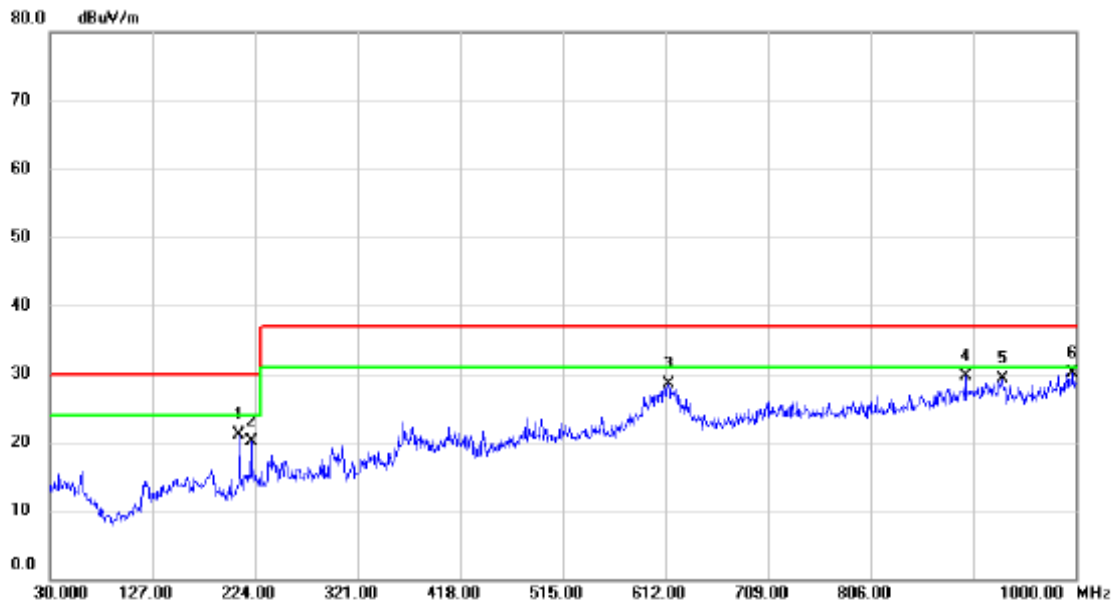

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		209.4500	38.85	-17.82	21.03	30.00	-8.97	QP	
2		220.1200	37.00	-16.82	20.18	30.00	-9.82	QP	
3		614.9100	36.99	-8.46	28.53	37.00	-8.47	QP	
4		895.2400	35.80	-6.08	29.72	37.00	-7.28	QP	
5		930.1600	35.00	-5.66	29.34	37.00	-7.66	QP	
6	*	997.0900	34.43	-4.25	30.18	37.00	-6.82	QP	


Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 6		

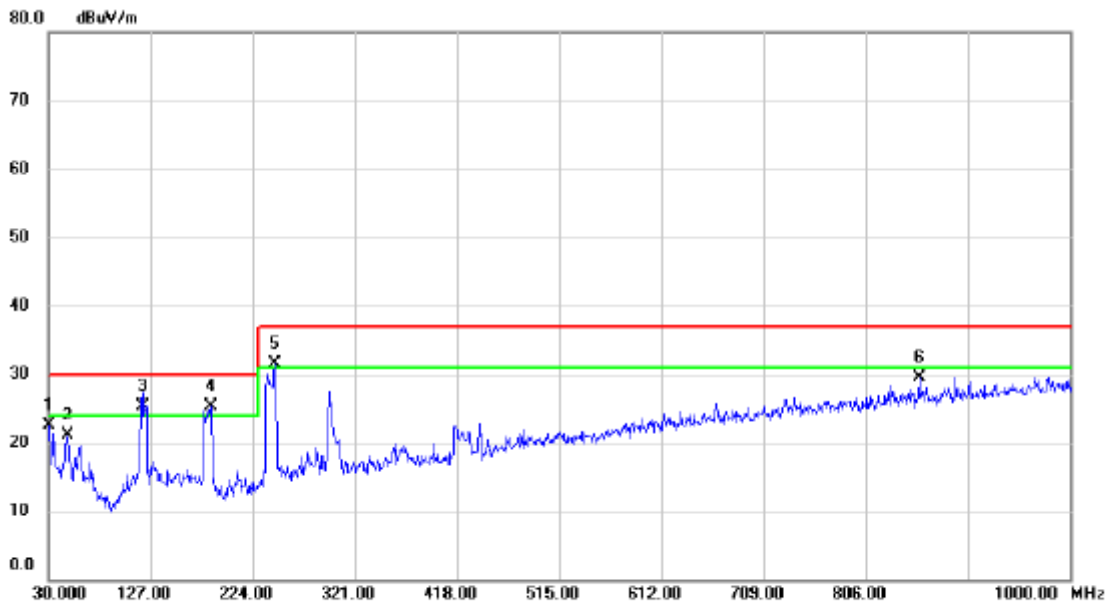

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	40.03	-17.55	22.48	30.00	-7.52	QP	
2		48.4300	38.40	-17.28	21.12	30.00	-8.88	QP	
3	*	119.2400	43.65	-18.29	25.36	30.00	-4.64	QP	
4	!	184.2300	42.88	-17.60	25.28	30.00	-4.72	QP	
5	!	245.3400	48.34	-16.87	31.47	37.00	-5.53	QP	
6		856.4400	34.73	-5.15	29.58	37.00	-7.42	QP	




Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 6		

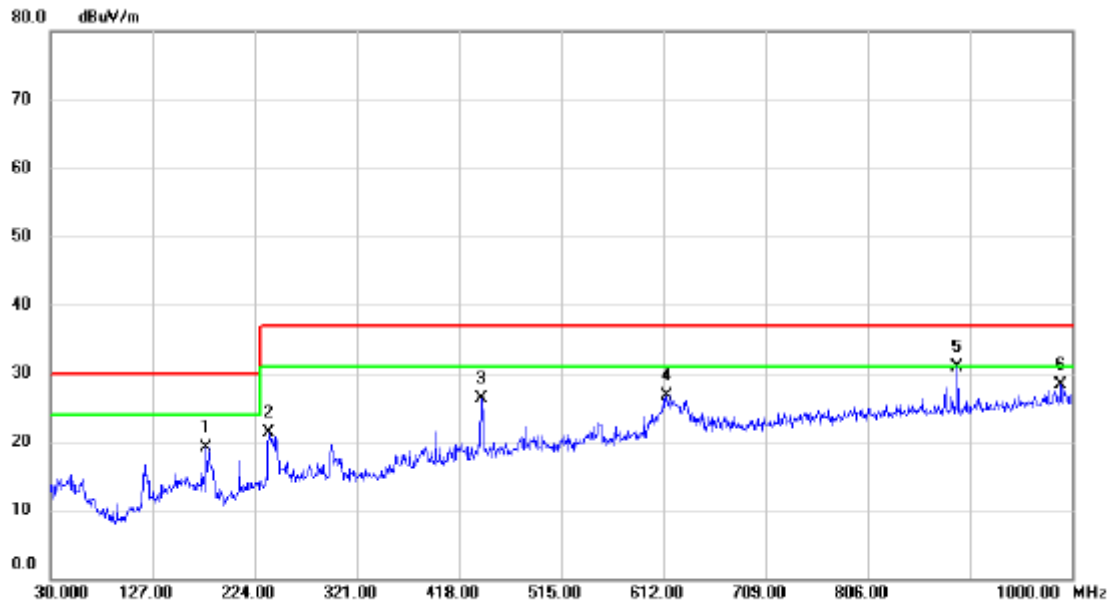


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		178.4100	36.30	-17.24	19.06	30.00	-10.94	QP	
2		237.5800	37.88	-16.50	21.38	37.00	-15.62	QP	
3		439.8250	37.90	-11.61	26.29	37.00	-10.71	QP	
4		614.9100	35.23	-8.46	26.77	37.00	-10.23	QP	
5	*	890.3900	36.95	-6.13	30.82	37.00	-6.18	QP	
6		989.3300	32.77	-4.44	28.33	37.00	-8.67	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 11		

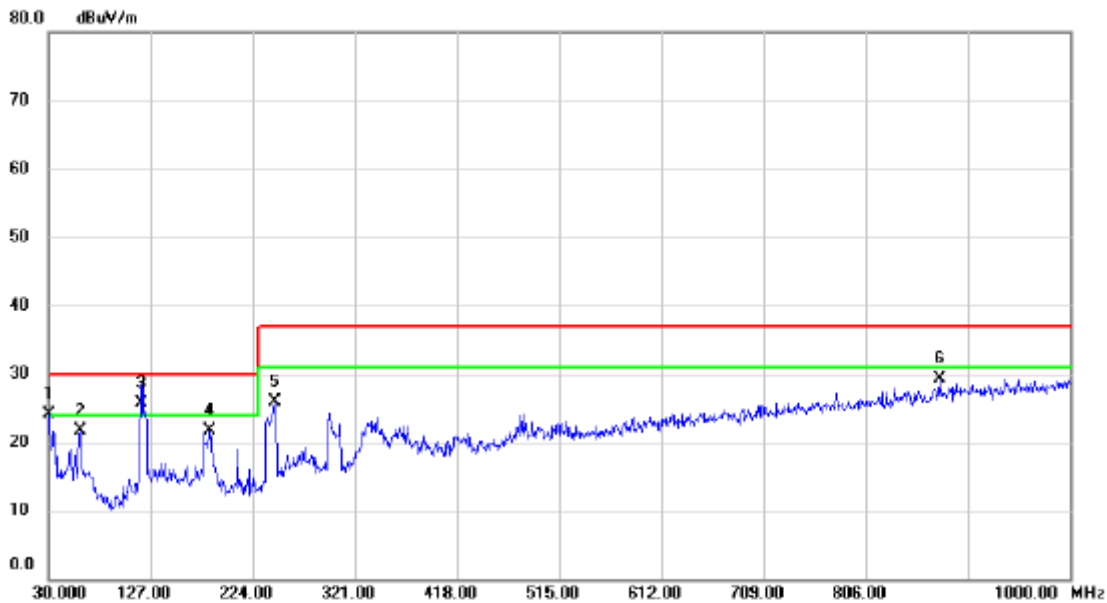


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	30.0000	41.70	-17.55	24.15	30.00	-5.85	QP	
2		60.0700	39.13	-17.43	21.70	30.00	-8.30	QP	
3	*	118.2700	44.14	-18.39	25.75	30.00	-4.25	QP	
4		183.2600	39.14	-17.49	21.65	30.00	-8.35	QP	
5		245.3400	42.77	-16.87	25.90	37.00	-11.10	QP	
6		875.8400	34.24	-4.96	29.28	37.00	-7.72	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 11		

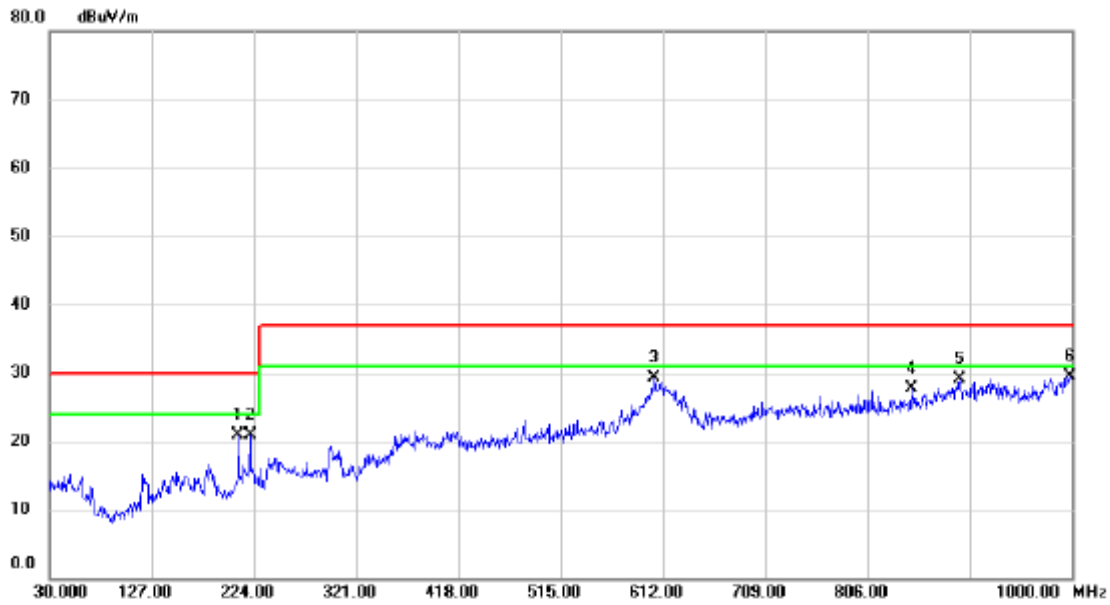


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		209.4500	38.63	-17.82	20.81	30.00	-9.19	QP	
2		220.1200	37.65	-16.82	20.83	30.00	-9.17	QP	
3		603.2700	37.88	-8.60	29.28	37.00	-7.72	QP	
4		847.7100	34.20	-6.57	27.63	37.00	-9.37	QP	
5		893.3000	35.12	-6.09	29.03	37.00	-7.97	QP	
6	*	997.5750	33.72	-4.24	29.48	37.00	-7.52	QP	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

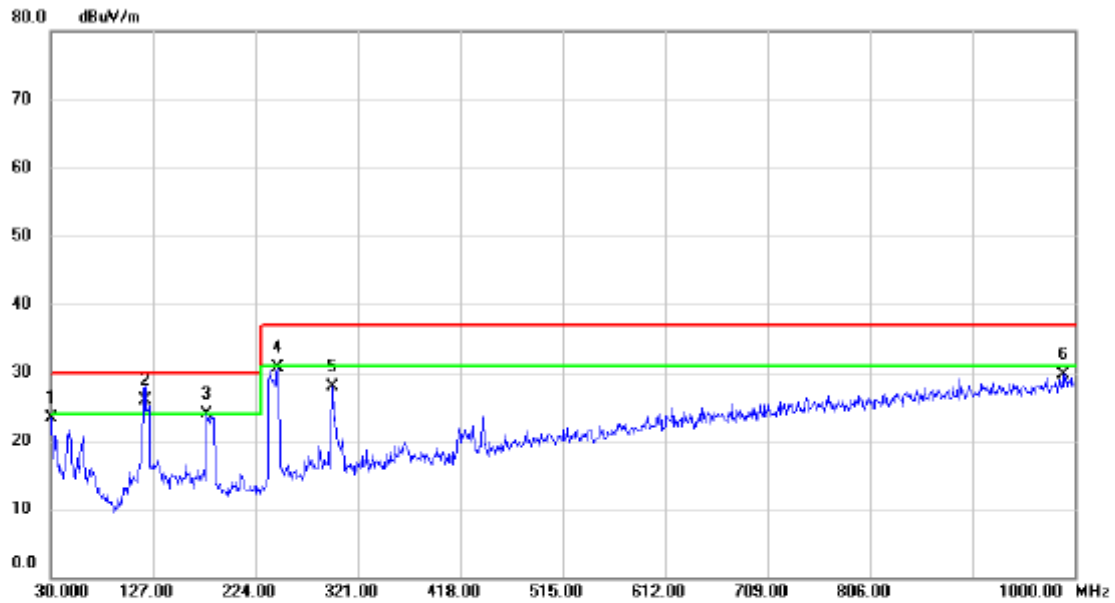

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	40.93	-17.55	23.38	30.00	-6.62	QP	
2	*	119.2400	44.17	-18.29	25.88	30.00	-4.12	QP	
3		177.4400	40.78	-16.95	23.83	30.00	-6.17	QP	
4		245.3400	47.56	-16.87	30.69	37.00	-6.31	QP	
5		296.7500	42.67	-14.85	27.82	37.00	-9.18	QP	
6		988.3600	33.07	-3.38	29.69	37.00	-7.31	QP	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

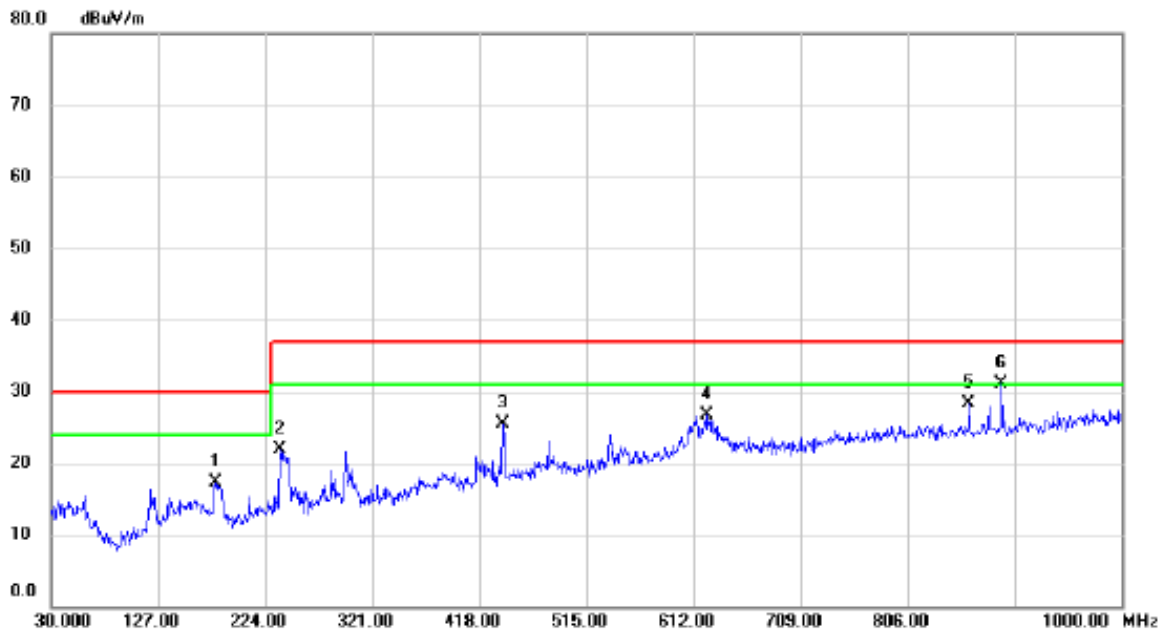

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		179.3800	34.65	-17.31	17.34	30.00	-12.66	QP	
2		237.5800	38.40	-16.50	21.90	37.00	-15.10	QP	
3		439.3400	37.17	-11.63	25.54	37.00	-11.46	QP	
4		624.6100	35.05	-8.34	26.71	37.00	-10.29	QP	
5		861.2900	34.72	-6.45	28.27	37.00	-8.73	QP	
6	*	890.3900	37.25	-6.13	31.12	37.00	-5.88	QP	

## 4.2 RADIATED EMISSIONS ABOVE 1 GHZ

### 4.2.1 LIMITS

Class B equipment above 1000MHz

Limit For EN 55032:2015+A11:2020

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000				54
1000 - 3000			Peak / 1 MHz	70
3000 - 6000				74

Limit For EN 55032:2015+A1:2020

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 6000	FSOATS	3	Average / 1 MHz	54
1000 - 6000			Peak / 1 MHz	74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency ( $F_x$ )	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108 < F_x \leq 500$ MHz	2 GHz
$500 < F_x \leq 1000$ MHz	5 GHz
$F_x > 1$ GHz	$5 \times F_x$ up to a maximum of 6 GHz

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	May 26, 2022
2	Amplifier	Agilent	8449B	3008A02333	Jan. 22, 2023
3	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jan. 22, 2023
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	Micable	RWLP50-4.0A-S MSM-12M-KJ	20191107 002	Mar. 31, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.


All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.


#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

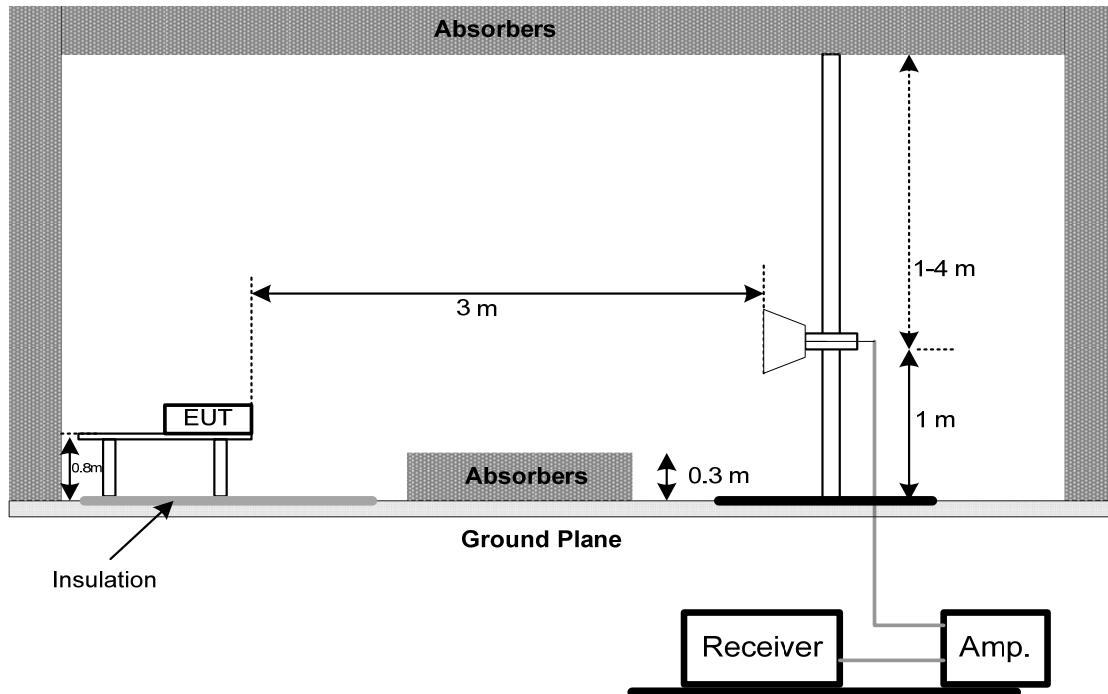
**4.2.5 TEST SETUP****ABOVE 1 GHZ**



**4.2.6 MEASUREMENT DISTANCE**

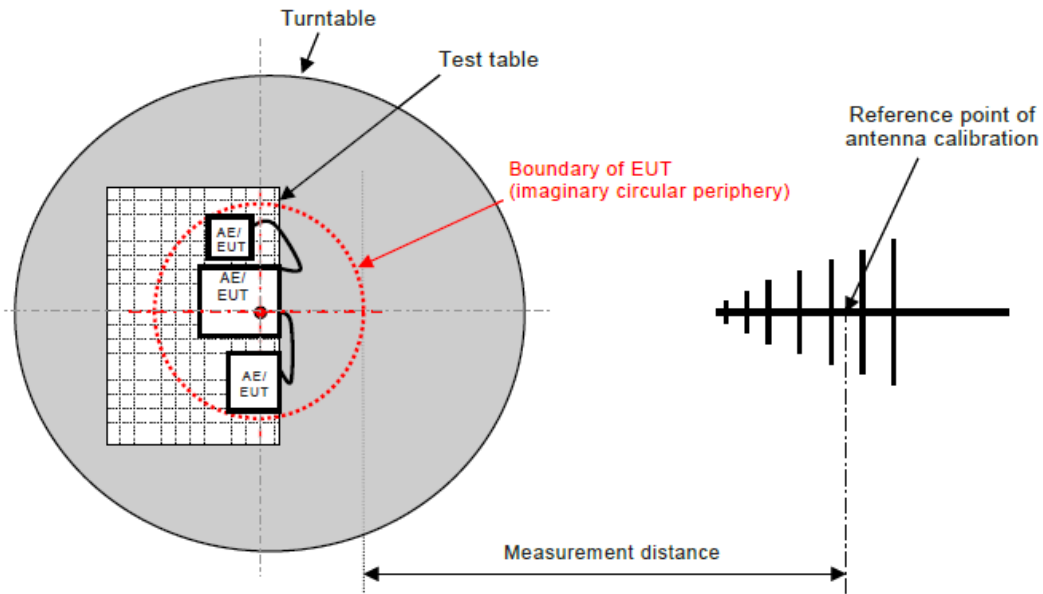

**Figure C.1 – Measurement distance**

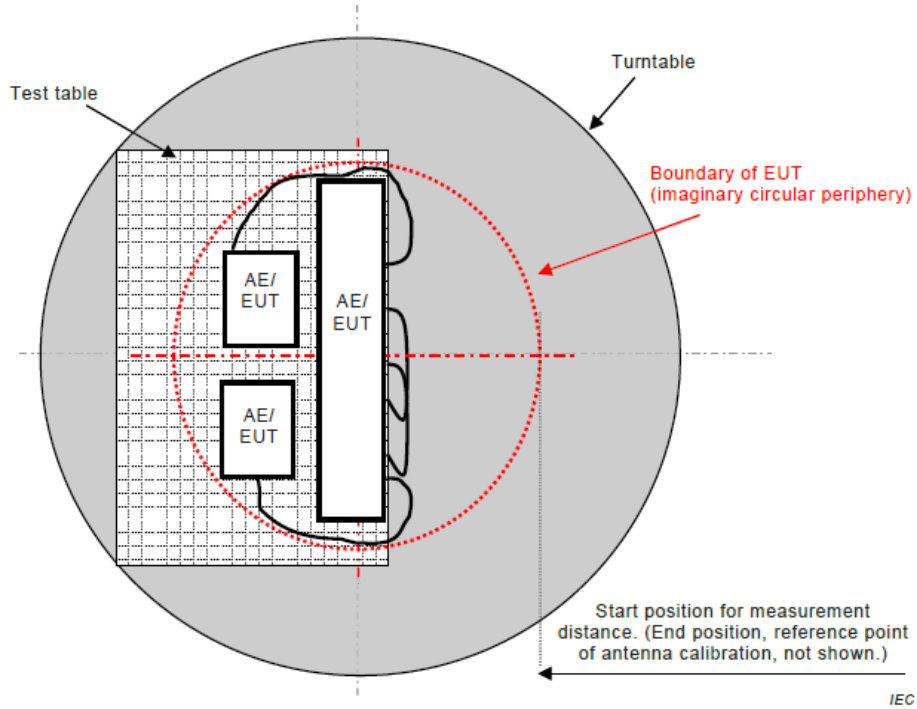


**Figure C.2 – Boundary of EUT, Local AE and associated cabling**

### 4.2.7 TEST RESULTS (ABOVE 1 GHZ)


For EN 55032:2015+A11:2020

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

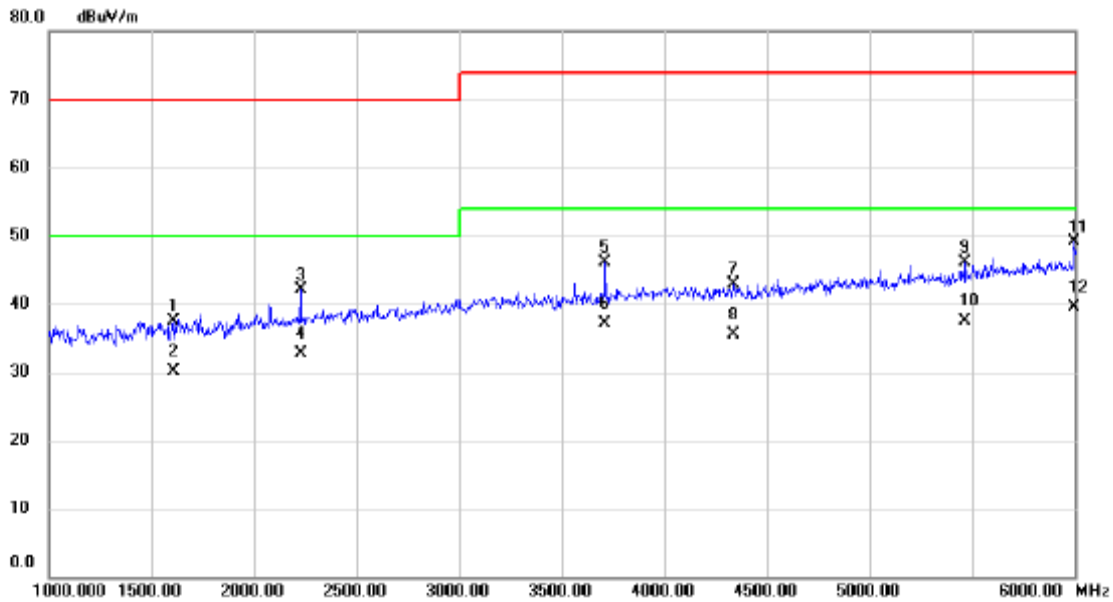


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1607.500	39.86	-2.30	37.56	70.00	-32.44	peak	
2		1607.500	32.40	-2.30	30.10	50.00	-19.90	AVG	
3		2227.500	40.92	1.18	42.10	70.00	-27.90	peak	
4		2227.500	31.50	1.18	32.68	50.00	-17.32	AVG	
5		3712.500	39.23	6.92	46.15	74.00	-27.85	peak	
6		3712.500	30.10	6.92	37.02	54.00	-16.98	AVG	
7		4337.500	34.12	8.76	42.88	74.00	-31.12	peak	
8		4337.500	26.70	8.76	35.46	54.00	-18.54	AVG	
9		5465.000	33.38	12.76	46.14	74.00	-27.86	peak	
10		5465.000	24.80	12.76	37.56	54.00	-16.44	AVG	
11		5995.000	34.86	14.30	49.16	74.00	-24.84	peak	
12	*	5995.000	25.20	14.30	39.50	54.00	-14.50	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

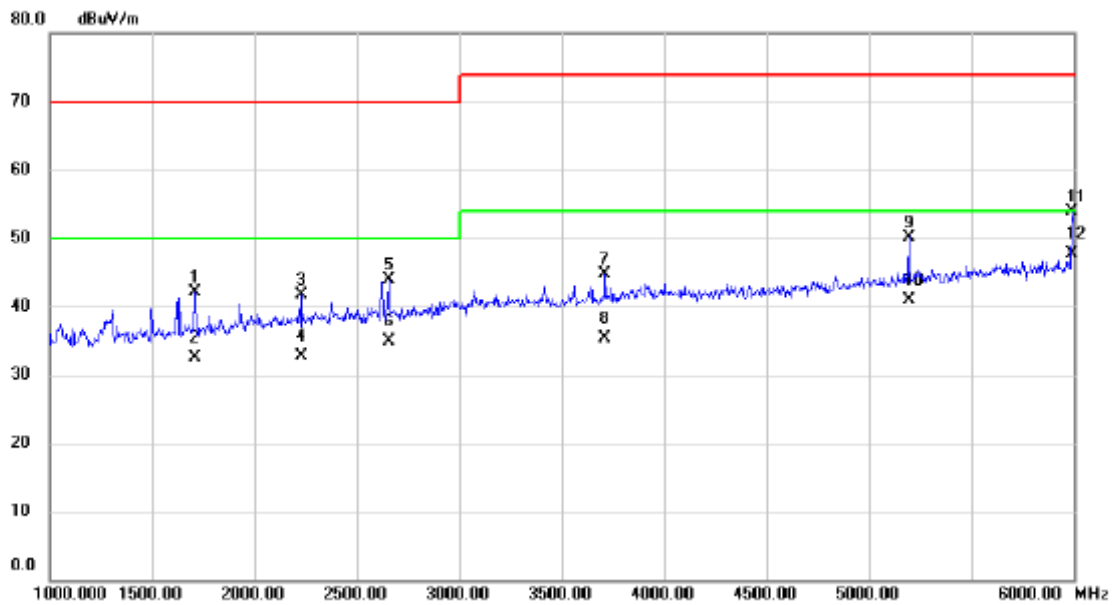


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1710.000	43.70	-1.61	42.09	70.00	-27.91	peak	
2		1710.000	34.20	-1.61	32.59	50.00	-17.41	AVG	
3		2227.500	40.56	1.18	41.74	70.00	-28.26	peak	
4		2227.500	31.50	1.18	32.68	50.00	-17.32	AVG	
5		2655.000	41.06	2.87	43.93	70.00	-26.07	peak	
6		2655.000	32.10	2.87	34.97	50.00	-15.03	AVG	
7		3712.500	37.81	6.92	44.73	74.00	-29.27	peak	
8		3712.500	28.40	6.92	35.32	54.00	-18.68	AVG	
9		5197.500	38.61	11.59	50.20	74.00	-23.80	peak	
10		5197.500	29.40	11.59	40.99	54.00	-13.01	AVG	
11		5992.500	39.61	14.29	53.90	74.00	-20.10	peak	
12	*	5992.500	33.50	14.29	47.79	54.00	-6.21	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

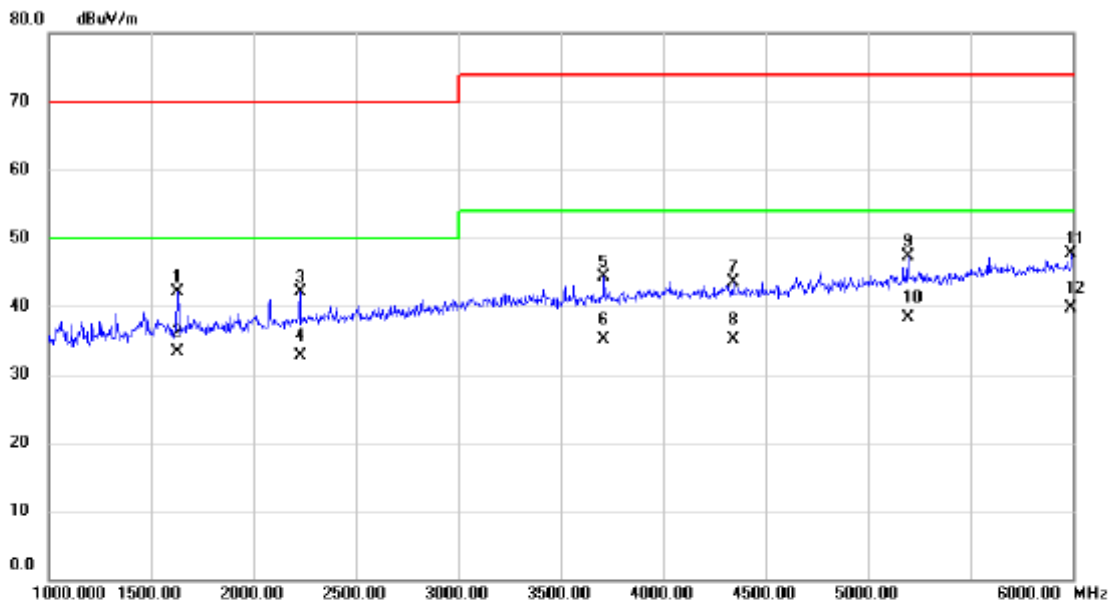


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1632.500	44.16	-2.12	42.04	70.00	-27.96	peak	
2		1632.500	35.40	-2.12	33.28	50.00	-16.72	AVG	
3		2227.500	40.95	1.18	42.13	70.00	-27.87	peak	
4		2227.500	31.50	1.18	32.68	50.00	-17.32	AVG	
5		3712.500	37.36	6.92	44.28	74.00	-29.72	peak	
6		3712.500	28.10	6.92	35.02	54.00	-18.98	AVG	
7		4340.000	34.72	8.77	43.49	74.00	-30.51	peak	
8		4340.000	26.30	8.77	35.07	54.00	-18.93	AVG	
9		5197.500	35.70	11.59	47.29	74.00	-26.71	peak	
10		5197.500	26.70	11.59	38.29	54.00	-15.71	AVG	
11		5992.500	33.46	14.29	47.75	74.00	-26.25	peak	
12	*	5992.500	25.40	14.29	39.69	54.00	-14.31	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

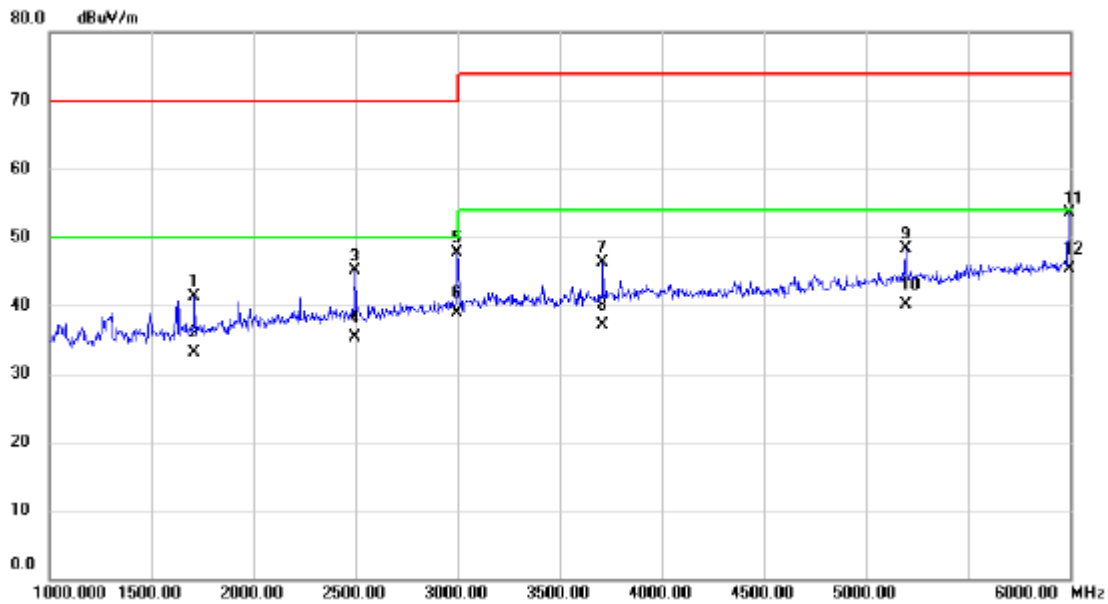


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1710.000	42.91	-1.61	41.30	70.00	-28.70	peak	
2		1710.000	34.80	-1.61	33.19	50.00	-16.81	AVG	
3		2495.000	42.85	2.16	45.01	70.00	-24.99	peak	
4		2495.000	33.10	2.16	35.26	50.00	-14.74	AVG	
5		2997.500	43.28	4.39	47.67	70.00	-22.33	peak	
6		2997.500	34.50	4.39	38.89	50.00	-11.11	AVG	
7		3712.500	39.44	6.92	46.36	74.00	-27.64	peak	
8		3712.500	30.10	6.92	37.02	54.00	-16.98	AVG	
9		5197.500	36.75	11.59	48.34	74.00	-25.66	peak	
10		5197.500	28.60	11.59	40.19	54.00	-13.81	AVG	
11		5995.000	39.27	14.30	53.57	74.00	-20.43	peak	
12	*	5995.000	31.10	14.30	45.40	54.00	-8.60	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 6		

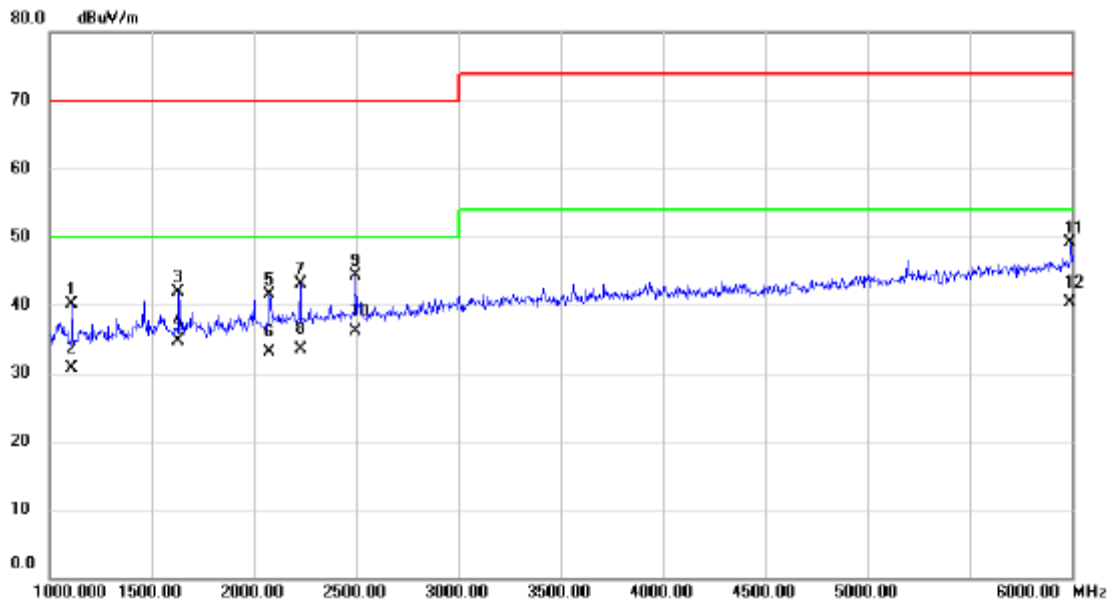


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1112.500	44.73	-4.66	40.07	70.00	-29.93	peak	
2		1112.500	35.40	-4.66	30.74	50.00	-19.26	AVG	
3		1632.500	44.10	-2.12	41.98	70.00	-28.02	peak	
4		1632.500	36.80	-2.12	34.68	50.00	-15.32	AVG	
5		2077.500	40.78	0.64	41.42	70.00	-28.58	peak	
6		2077.500	32.40	0.64	33.04	50.00	-16.96	AVG	
7		2227.500	41.85	1.18	43.03	70.00	-26.97	peak	
8		2227.500	32.40	1.18	33.58	50.00	-16.42	AVG	
9		2495.000	42.10	2.16	44.26	70.00	-25.74	peak	
10		2495.000	33.90	2.16	36.06	50.00	-13.94	AVG	
11		5992.500	34.83	14.29	49.12	74.00	-24.88	peak	
12	*	5992.500	26.10	14.29	40.39	54.00	-13.61	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 6		

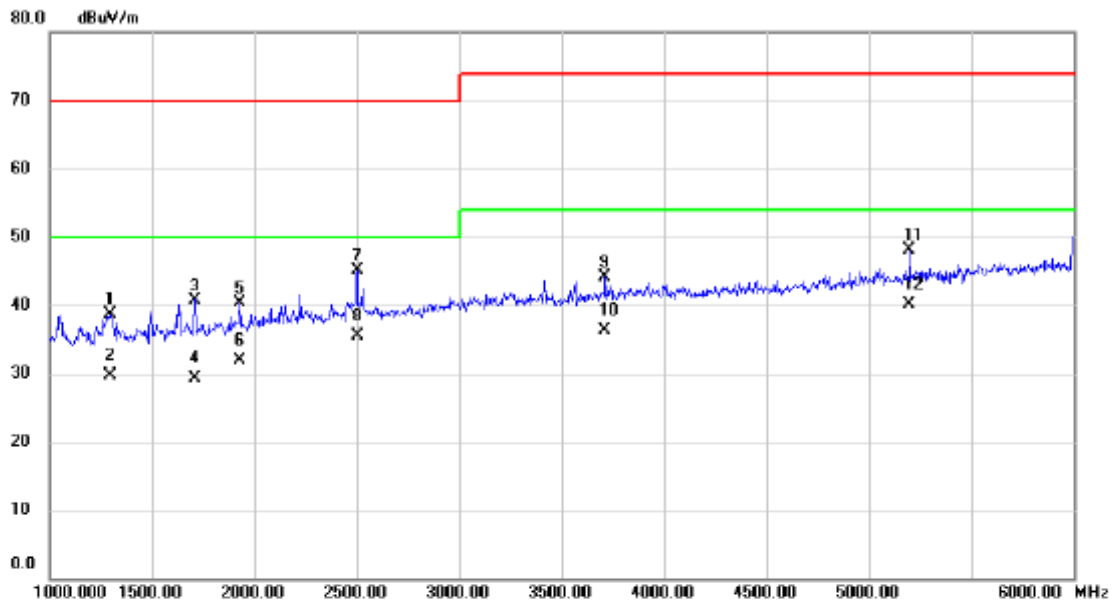

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1295.295	42.53	-3.90	38.63	70.00	-31.37	peak	
2		1295.295	33.60	-3.90	29.70	50.00	-20.30	AVG	
3		1710.711	42.40	-1.60	40.80	70.00	-29.20	peak	
4		1710.711	30.90	-1.60	29.30	50.00	-20.70	AVG	
5		1930.931	40.43	-0.11	40.32	70.00	-29.68	peak	
6		1930.931	32.10	-0.11	31.99	50.00	-18.01	AVG	
7		2501.502	42.83	2.18	45.01	70.00	-24.99	peak	
8		2501.502	33.40	2.18	35.58	50.00	-14.42	AVG	
9		3712.713	37.14	6.92	44.06	74.00	-29.94	peak	
10		3712.713	29.40	6.92	36.32	54.00	-17.68	AVG	
11		5199.199	36.45	11.59	48.04	74.00	-25.96	peak	
12	*	5199.199	28.60	11.59	40.19	54.00	-13.81	AVG	


Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 11		

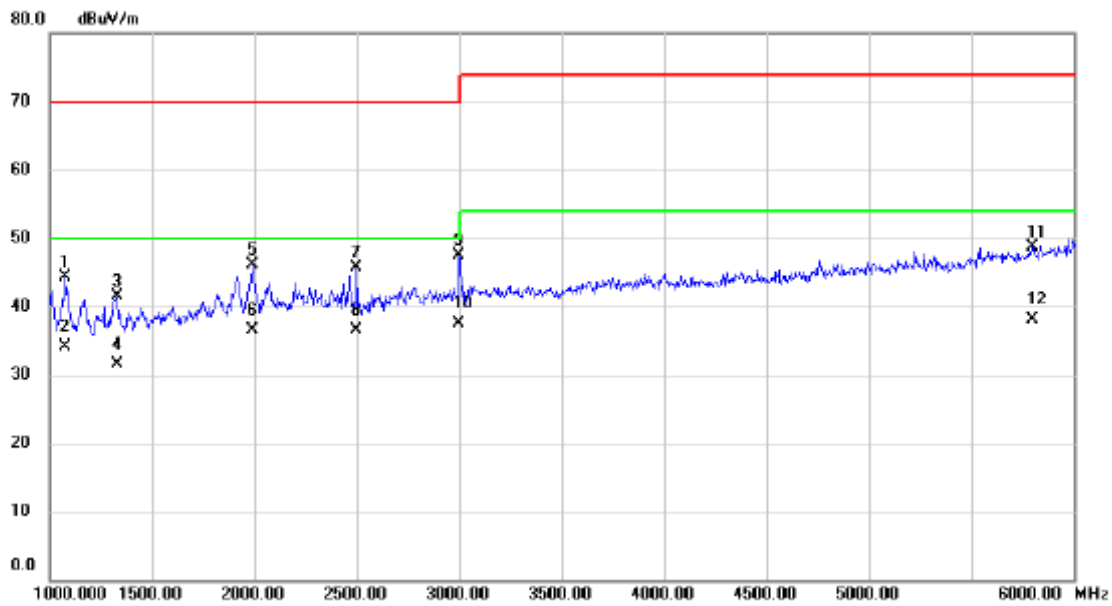

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1077.500	48.15	-3.92	44.23	70.00	-25.77	peak	
2		1077.500	38.10	-3.92	34.18	50.00	-15.82	AVG	
3		1327.500	44.37	-2.79	41.58	70.00	-28.42	peak	
4		1327.500	34.27	-2.79	31.48	50.00	-18.52	AVG	
5		1992.500	44.73	1.42	46.15	70.00	-23.85	peak	
6		1992.500	35.06	1.42	36.48	50.00	-13.52	AVG	
7		2495.000	42.37	3.39	45.76	70.00	-24.24	peak	
8		2495.000	33.09	3.39	36.48	50.00	-13.52	AVG	
9		2997.500	41.88	5.67	47.55	70.00	-22.45	peak	
10	*	2997.500	31.79	5.67	37.46	50.00	-12.54	AVG	
11		5795.000	32.87	15.84	48.71	74.00	-25.29	peak	
12		5795.000	22.31	15.84	38.15	54.00	-15.85	AVG	




Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 11		

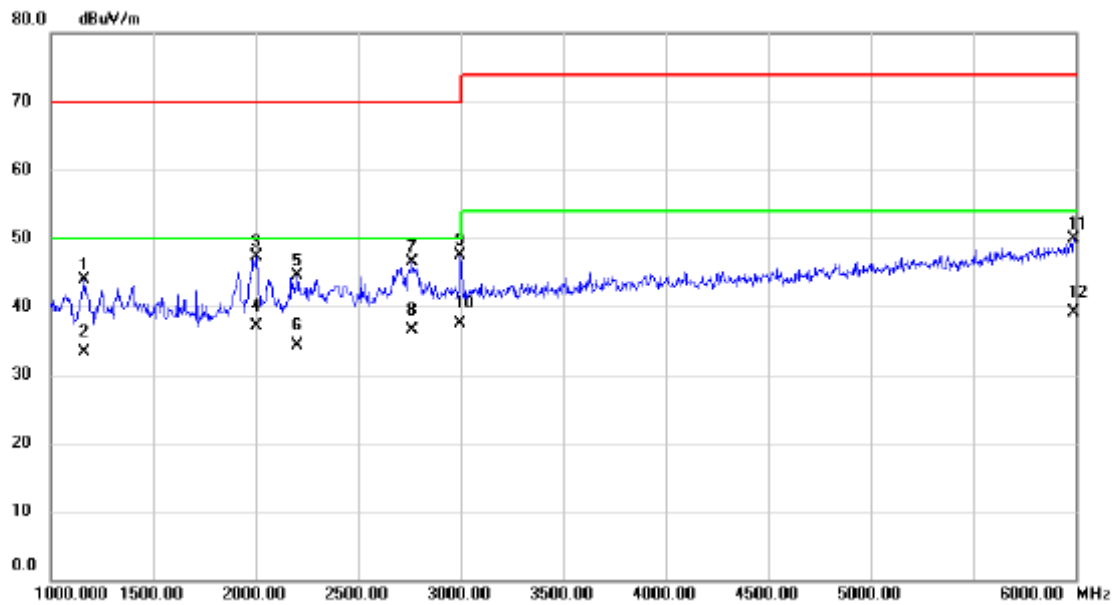


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1165.000	47.40	-3.52	43.88	70.00	-26.12	peak	
2		1165.000	36.80	-3.52	33.28	50.00	-16.72	AVG	
3		2002.500	45.91	1.49	47.40	70.00	-22.60	peak	
4		2002.500	35.66	1.49	37.15	50.00	-12.85	AVG	
5		2202.500	42.30	2.26	44.56	70.00	-25.44	peak	
6		2202.500	31.99	2.26	34.25	50.00	-15.75	AVG	
7		2765.000	41.89	4.61	46.50	70.00	-23.50	peak	
8		2765.000	31.88	4.61	36.49	50.00	-13.51	AVG	
9		2995.000	41.86	5.65	47.51	70.00	-22.49	peak	
10	*	2995.000	31.83	5.65	37.48	50.00	-12.52	AVG	
11		5992.500	33.29	16.52	49.81	74.00	-24.19	peak	
12		5992.500	22.63	16.52	39.15	54.00	-14.85	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

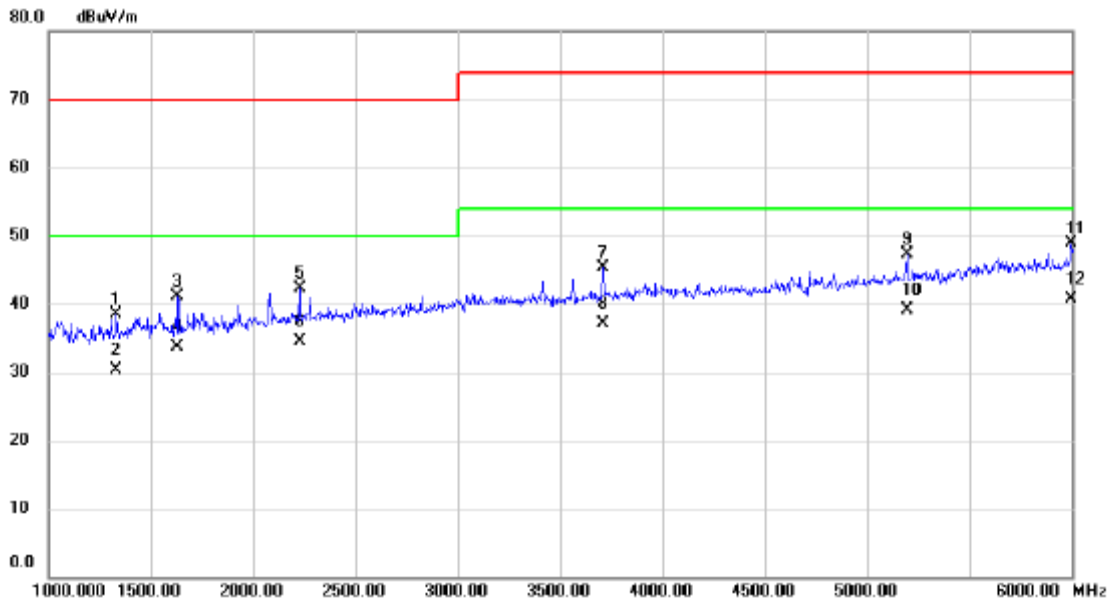

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1330.000	42.16	-3.75	38.41	70.00	-31.59	peak	
2		1330.000	34.10	-3.75	30.35	50.00	-19.65	AVG	
3		1632.500	43.20	-2.12	41.08	70.00	-28.92	peak	
4		1632.500	35.80	-2.12	33.68	50.00	-16.32	AVG	
5		2227.500	41.12	1.18	42.30	70.00	-27.70	peak	
6		2227.500	33.40	1.18	34.58	50.00	-15.42	AVG	
7		3712.500	38.42	6.92	45.34	74.00	-28.66	peak	
8		3712.500	30.10	6.92	37.02	54.00	-16.98	AVG	
9		5197.500	35.65	11.59	47.24	74.00	-26.76	peak	
10		5197.500	27.50	11.59	39.09	54.00	-14.91	AVG	
11		5997.500	34.55	14.32	48.87	74.00	-25.13	peak	
12	*	5997.500	26.30	14.32	40.62	54.00	-13.38	AVG	


Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

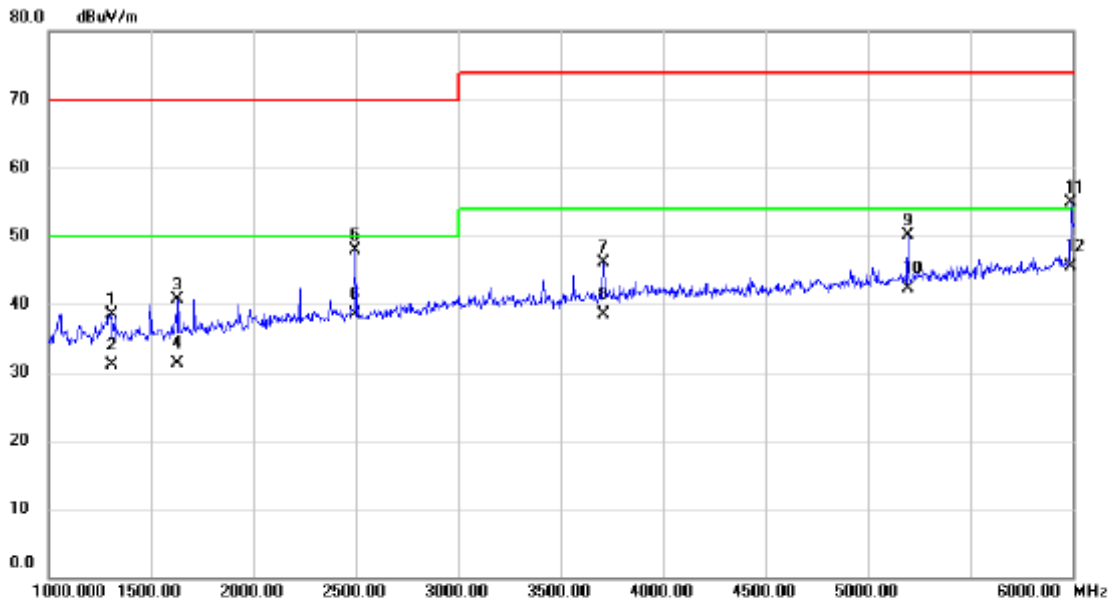

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1307.500	42.37	-3.84	38.53	70.00	-31.47	peak	
2		1307.500	34.90	-3.84	31.06	50.00	-18.94	AVG	
3		1632.500	42.92	-2.12	40.80	70.00	-29.20	peak	
4		1632.500	33.40	-2.12	31.28	50.00	-18.72	AVG	
5		2495.000	45.72	2.16	47.88	70.00	-22.12	peak	
6		2495.000	36.40	2.16	38.56	50.00	-11.44	AVG	
7		3712.500	39.17	6.92	46.09	74.00	-27.91	peak	
8		3712.500	31.50	6.92	38.42	54.00	-15.58	AVG	
9		5197.500	38.50	11.59	50.09	74.00	-23.91	peak	
10		5197.500	30.80	11.59	42.39	54.00	-11.61	AVG	
11		5992.500	40.65	14.29	54.94	74.00	-19.06	peak	
12	*	5992.500	31.20	14.29	45.49	54.00	-8.51	AVG	


For EN 55032:2015+A1:2020

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

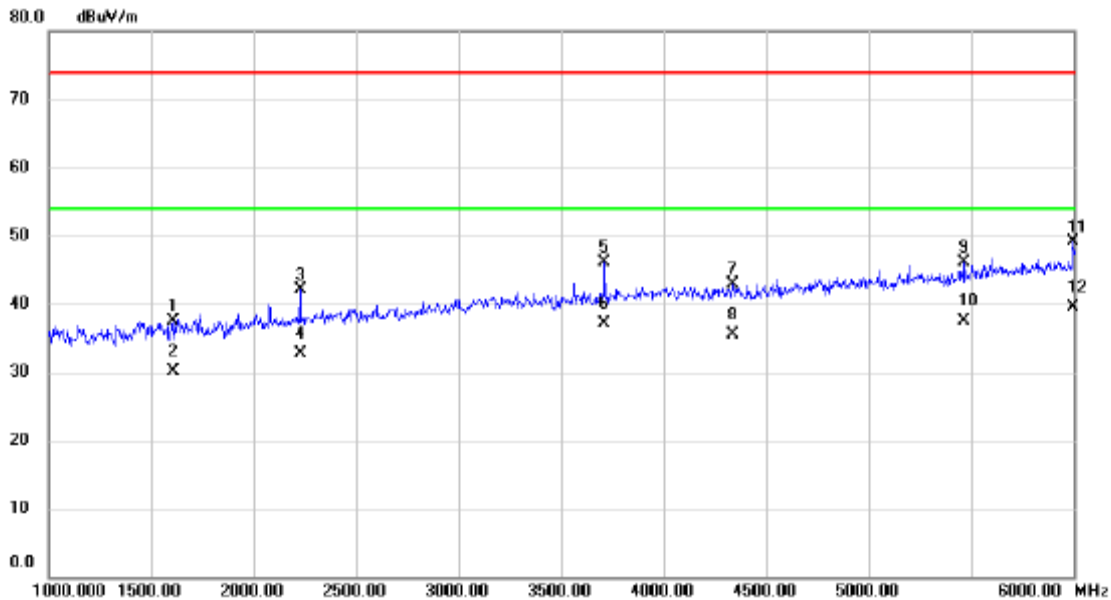

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1607.500	39.86	-2.30	37.56	74.00	-36.44	peak	
2		1607.500	32.40	-2.30	30.10	54.00	-23.90	AVG	
3		2227.500	40.92	1.18	42.10	74.00	-31.90	peak	
4		2227.500	31.50	1.18	32.68	54.00	-21.32	AVG	
5		3712.500	39.23	6.92	46.15	74.00	-27.85	peak	
6		3712.500	30.10	6.92	37.02	54.00	-16.98	AVG	
7		4337.500	34.12	8.76	42.88	74.00	-31.12	peak	
8		4337.500	26.70	8.76	35.46	54.00	-18.54	AVG	
9		5465.000	33.38	12.76	46.14	74.00	-27.86	peak	
10		5465.000	24.80	12.76	37.56	54.00	-16.44	AVG	
11		5995.000	34.86	14.30	49.16	74.00	-24.84	peak	
12	*	5995.000	25.20	14.30	39.50	54.00	-14.50	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

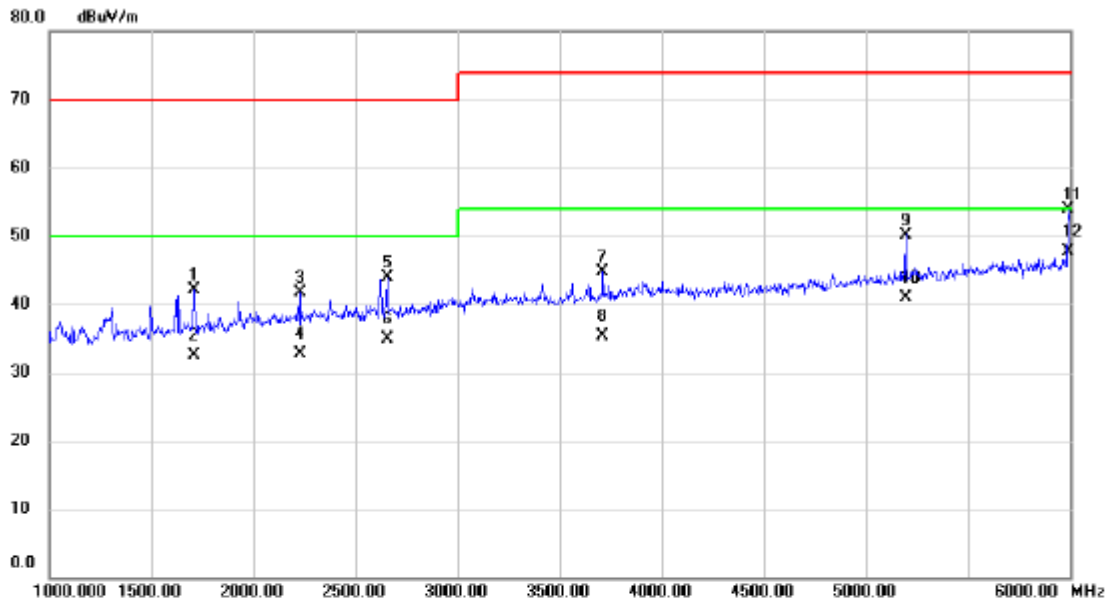

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1710.000	43.70	-1.61	42.09	70.00	-27.91	peak	
2		1710.000	34.20	-1.61	32.59	50.00	-17.41	AVG	
3		2227.500	40.56	1.18	41.74	70.00	-28.26	peak	
4		2227.500	31.50	1.18	32.68	50.00	-17.32	AVG	
5		2655.000	41.06	2.87	43.93	70.00	-26.07	peak	
6		2655.000	32.10	2.87	34.97	50.00	-15.03	AVG	
7		3712.500	37.81	6.92	44.73	74.00	-29.27	peak	
8		3712.500	28.40	6.92	35.32	54.00	-18.68	AVG	
9		5197.500	38.61	11.59	50.20	74.00	-23.80	peak	
10		5197.500	29.40	11.59	40.99	54.00	-13.01	AVG	
11		5992.500	39.61	14.29	53.90	74.00	-20.10	peak	
12	*	5992.500	33.50	14.29	47.79	54.00	-6.21	AVG	

### 4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

#### 4.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

**NOTE:**

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100526	Jul. 10, 2022
2	EMI Test Receiver	R&S	ESR3	101862	Jan. 23, 2023
3*	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Feb. 28, 2024
4	Cable	N/A	RG400	N/A(12m)	Mar. 09, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.


“\*\*” calibration period of equipment list is three year.

Except \* item, all calibration period of equipment list is one year.

#### 4.3.3 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.3.4 TEST SETUP

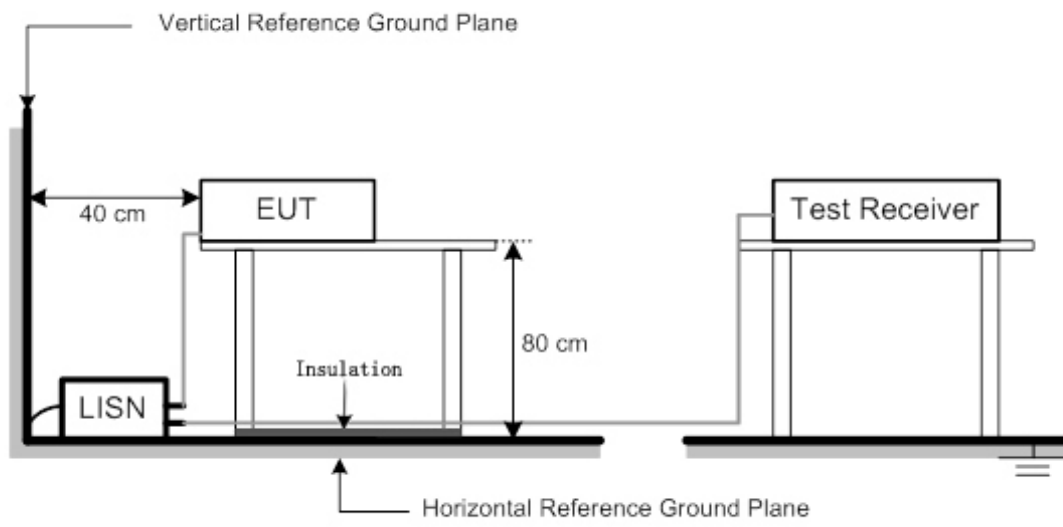

### 4.3.5 TEST RESULTS


Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

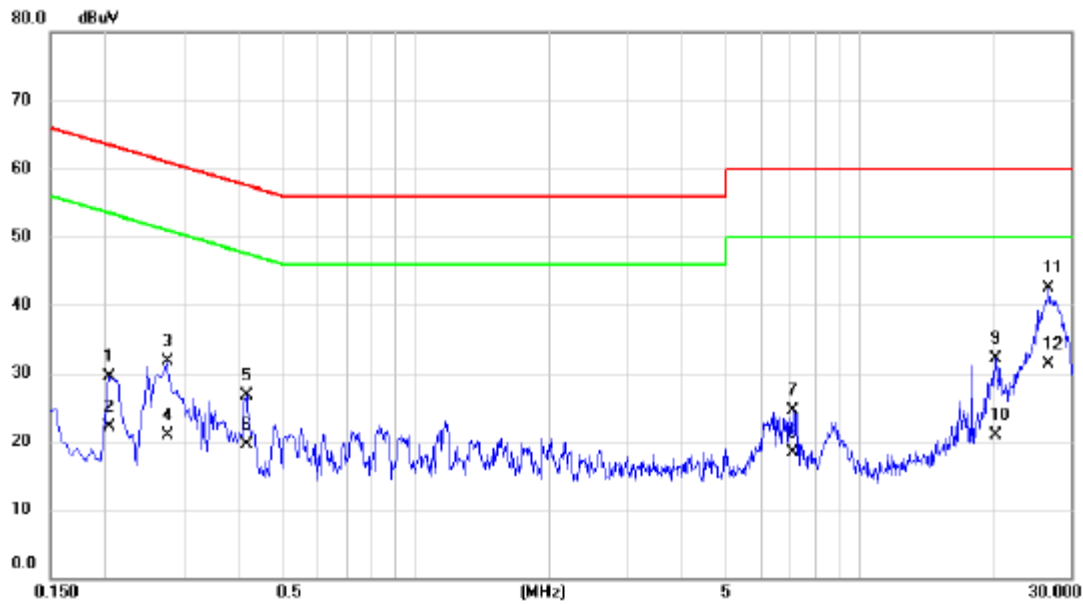

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2040	19.71	9.77	29.48	63.45	-33.97	QP	
2		0.2040	12.30	9.77	22.07	53.45	-31.38	AVG	
3		0.2760	21.89	9.79	31.68	60.94	-29.26	QP	
4		0.2760	11.20	9.79	20.99	50.94	-29.95	AVG	
5		0.4155	16.93	9.81	26.74	57.54	-30.80	QP	
6		0.4155	9.60	9.81	19.41	47.54	-28.13	AVG	
7		7.0710	14.26	10.26	24.52	60.00	-35.48	QP	
8		7.0710	8.10	10.26	18.36	50.00	-31.64	AVG	
9		20.3370	21.52	10.53	32.05	60.00	-27.95	QP	
10		20.3370	10.40	10.53	20.93	50.00	-29.07	AVG	
11	*	26.7495	31.68	10.73	42.41	60.00	-17.59	QP	
12		26.7495	20.50	10.73	31.23	50.00	-18.77	AVG	




Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

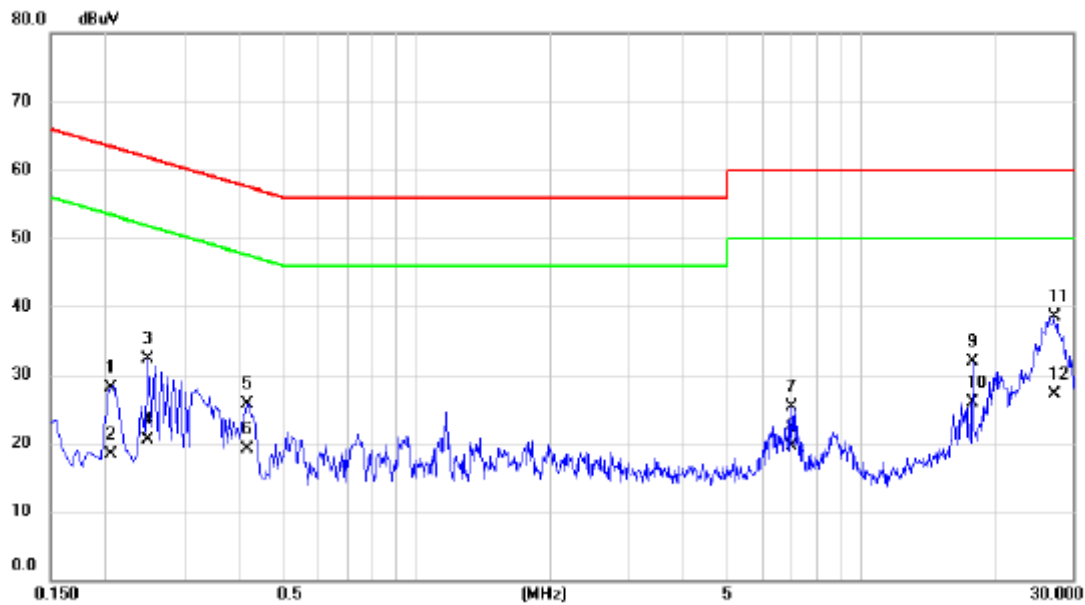


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2061	18.33	9.80	28.13	63.36	-35.23	QP	
2		0.2061	8.60	9.80	18.40	53.36	-34.96	AVG	
3		0.2490	22.43	9.81	32.24	61.79	-29.55	QP	
4		0.2490	10.70	9.81	20.51	51.79	-31.28	AVG	
5		0.4155	15.78	9.87	25.65	57.54	-31.89	QP	
6		0.4155	9.20	9.87	19.07	47.54	-28.47	AVG	
7		6.9855	15.04	10.33	25.37	60.00	-34.63	QP	
8		6.9855	9.10	10.33	19.43	50.00	-30.57	AVG	
9		17.8890	21.29	10.52	31.81	60.00	-28.19	QP	
10		17.8890	15.30	10.52	25.82	50.00	-24.18	AVG	
11	*	27.2670	27.72	10.84	38.56	60.00	-21.44	QP	
12		27.2670	16.34	10.84	27.18	50.00	-22.82	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 2		

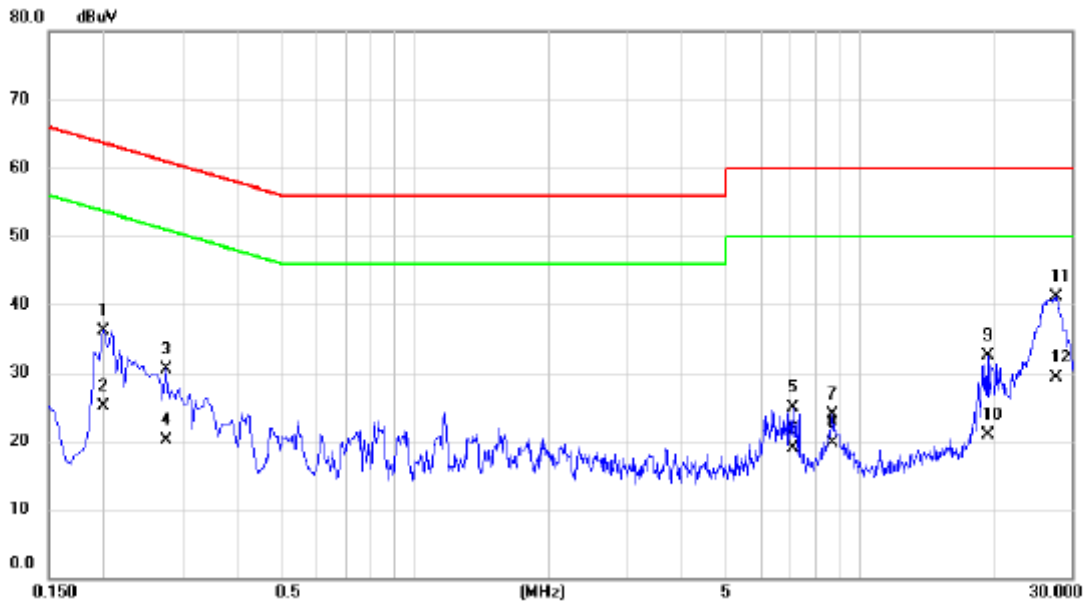


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1995	26.43	9.77	36.20	63.63	-27.43	QP	
2		0.1995	15.30	9.77	25.07	53.63	-28.56	AVG	
3		0.2760	20.81	9.79	30.60	60.94	-30.34	QP	
4		0.2760	10.40	9.79	20.19	50.94	-30.75	AVG	
5		7.0575	14.65	10.26	24.91	60.00	-35.09	QP	
6		7.0575	8.70	10.26	18.96	50.00	-31.04	AVG	
7		8.6550	13.65	10.18	23.83	60.00	-36.17	QP	
8		8.6550	9.50	10.18	19.68	50.00	-30.32	AVG	
9		19.3920	21.93	10.50	32.43	60.00	-27.57	QP	
10		19.3920	10.40	10.50	20.90	50.00	-29.10	AVG	
11	*	27.6135	30.26	10.76	41.02	60.00	-18.98	QP	
12		27.6135	18.60	10.76	29.36	50.00	-20.64	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 2		

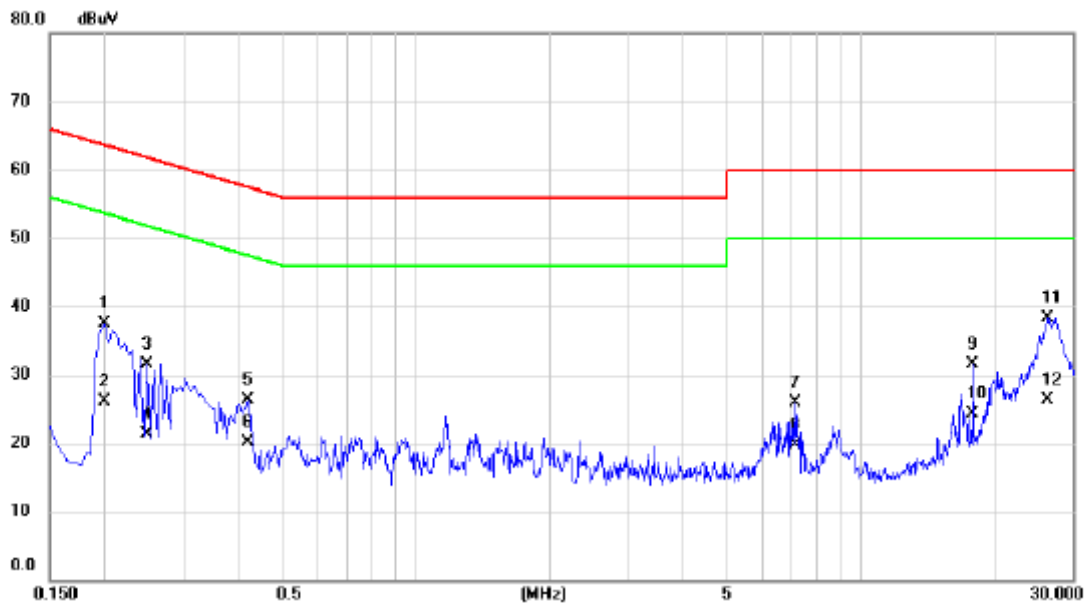


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1995	27.61	9.80	37.41	63.63	-26.22	QP	
2		0.1995	16.40	9.80	26.20	53.63	-27.43	AVG	
3		0.2490	21.75	9.81	31.56	61.79	-30.23	QP	
4		0.2490	11.50	9.81	21.31	51.79	-30.48	AVG	
5		0.4200	16.52	9.87	26.39	57.45	-31.06	QP	
6		0.4200	10.20	9.87	20.07	47.45	-27.38	AVG	
7		7.1385	15.67	10.32	25.99	60.00	-34.01	QP	
8		7.1385	9.30	10.32	19.62	50.00	-30.38	AVG	
9		17.8890	20.91	10.52	31.43	60.00	-28.57	QP	
10		17.8890	13.70	10.52	24.22	50.00	-25.78	AVG	
11	*	26.4075	27.46	10.81	38.27	60.00	-21.73	QP	
12		26.4075	15.40	10.81	26.21	50.00	-23.79	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 6		

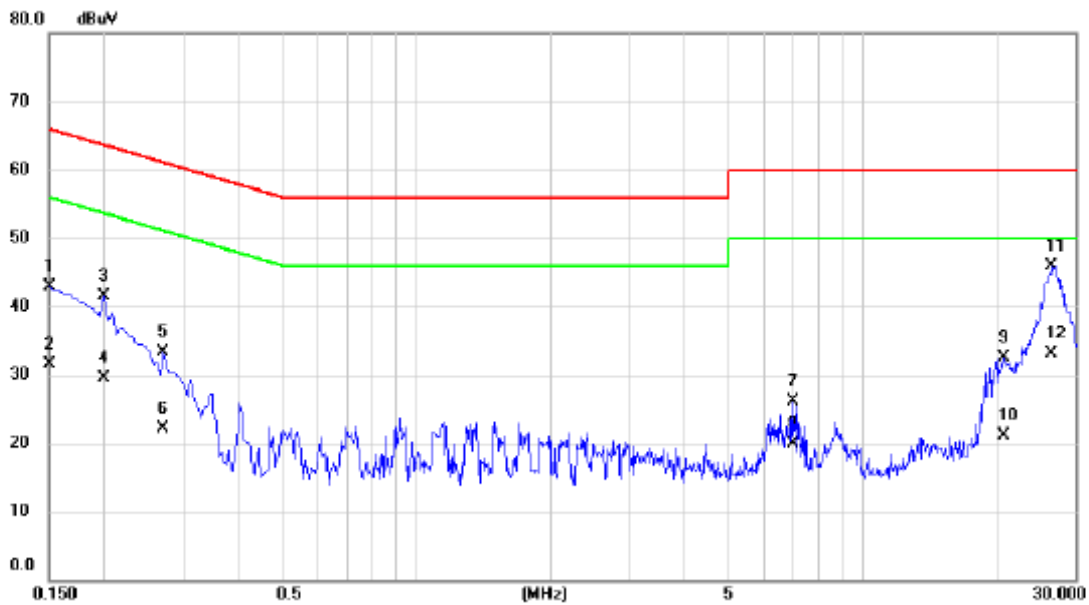


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	33.14	9.75	42.89	66.00	-23.11	QP	
2		0.1500	21.70	9.75	31.45	56.00	-24.55	AVG	
3		0.1995	31.73	9.77	41.50	63.63	-22.13	QP	
4		0.1995	19.80	9.77	29.57	53.63	-24.06	AVG	
5		0.2714	23.55	9.78	33.33	61.07	-27.74	QP	
6		0.2714	12.40	9.78	22.18	51.07	-28.89	AVG	
7		6.9855	15.82	10.26	26.08	60.00	-33.92	QP	
8		6.9855	9.60	10.26	19.86	50.00	-30.14	AVG	
9		20.6970	21.86	10.55	32.41	60.00	-27.59	QP	
10		20.6970	10.50	10.55	21.05	50.00	-28.95	AVG	
11	*	26.5965	35.24	10.73	45.97	60.00	-14.03	QP	
12		26.5965	22.30	10.73	33.03	50.00	-16.97	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 6		

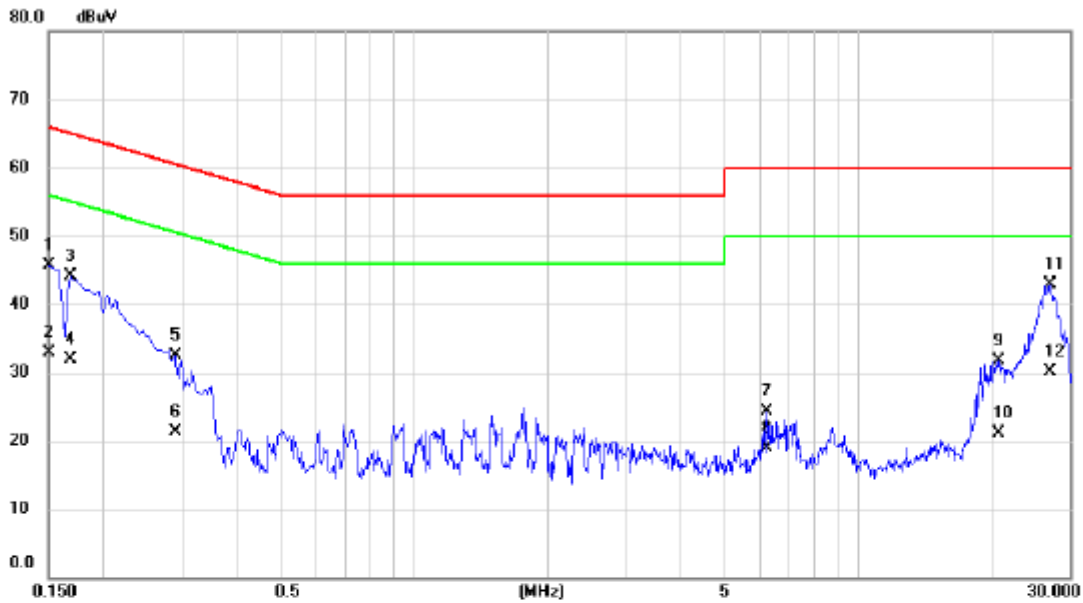


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.88	9.79	45.67	66.00	-20.33	QP	
2		0.1500	23.20	9.79	32.99	56.00	-23.01	AVG	
3		0.1685	34.25	9.80	44.05	65.03	-20.98	QP	
4		0.1685	22.10	9.80	31.90	55.03	-23.13	AVG	
5		0.2895	22.65	9.84	32.49	60.54	-28.05	QP	
6		0.2895	11.40	9.84	21.24	50.54	-29.30	AVG	
7		6.2204	14.06	10.28	24.34	60.00	-35.66	QP	
8		6.2204	8.60	10.28	18.88	50.00	-31.12	AVG	
9		20.7150	21.00	10.63	31.63	60.00	-28.37	QP	
10		20.7150	10.50	10.63	21.13	50.00	-28.87	AVG	
11	*	27.0600	31.98	10.84	42.82	60.00	-17.18	QP	
12		27.0600	19.30	10.84	30.14	50.00	-19.86	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 1		

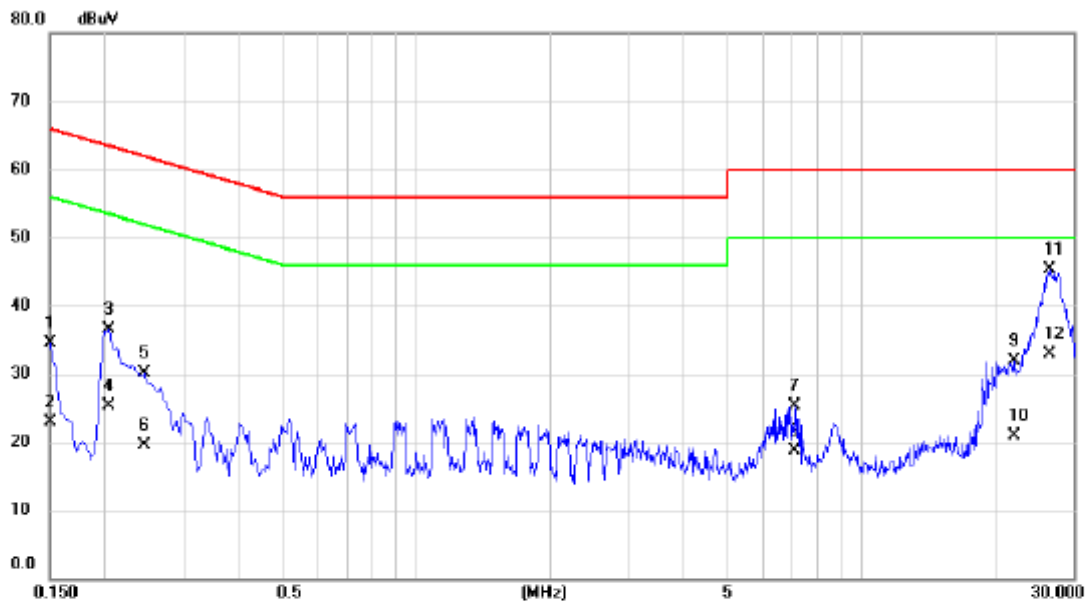

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	24.80	9.75	34.55	66.00	-31.45	QP	
2		0.1500	13.20	9.75	22.95	56.00	-33.05	AVG	
3		0.2040	26.64	9.77	36.41	63.45	-27.04	QP	
4		0.2040	15.60	9.77	25.37	53.45	-28.08	AVG	
5		0.2445	20.32	9.77	30.09	61.94	-31.85	QP	
6		0.2445	9.70	9.77	19.47	51.94	-32.47	AVG	
7		7.0665	14.97	10.26	25.23	60.00	-34.77	QP	
8		7.0665	8.50	10.26	18.76	50.00	-31.24	AVG	
9		22.0155	21.32	10.58	31.90	60.00	-28.10	QP	
10		22.0155	10.40	10.58	20.98	50.00	-29.02	AVG	
11	*	26.5695	34.55	10.72	45.27	60.00	-14.73	QP	
12		26.5695	22.20	10.72	32.92	50.00	-17.08	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 1		

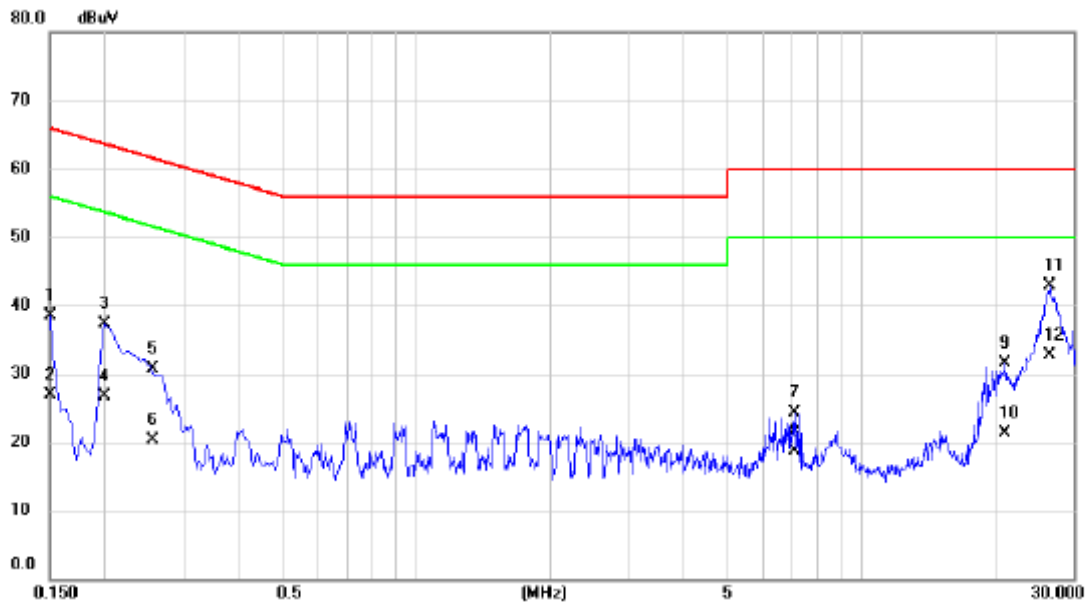

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	28.79	9.79	38.58	66.00	-27.42	QP	
2		0.1500	17.20	9.79	26.99	56.00	-29.01	AVG	
3		0.1995	27.59	9.80	37.39	63.63	-26.24	QP	
4		0.1995	16.90	9.80	26.70	53.63	-26.93	AVG	
5		0.2548	20.91	9.81	30.72	61.60	-30.88	QP	
6		0.2548	10.50	9.81	20.31	51.60	-31.29	AVG	
7		7.0710	13.98	10.33	24.31	60.00	-35.69	QP	
8		7.0710	8.30	10.33	18.63	50.00	-31.37	AVG	
9		20.9760	20.86	10.63	31.49	60.00	-28.51	QP	
10		20.9760	10.70	10.63	21.33	50.00	-28.67	AVG	
11	*	26.6010	32.06	10.82	42.88	60.00	-17.12	QP	
12		26.6010	21.90	10.82	32.72	50.00	-17.28	AVG	

## 5. HARMONIC AND FLICKER TEST

### 5.1 HARMONIC CURRENT EMISSIONS

#### 5.1.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

#### 5.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 10, 2022
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 10, 2022
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.


#### 5.1.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The classification of EUT is according to of EN 61000-3-2. The EUT is classified as Class D.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

#### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.1.5 TEST SETUP

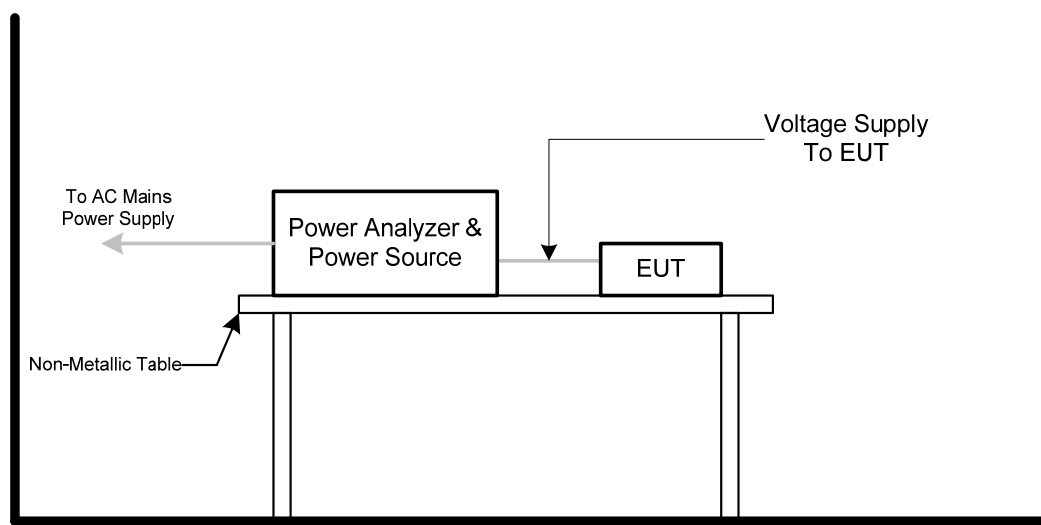





### 5.1.6 TEST RESULTS

Harmonic - Class D	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Current & voltage waveforms**

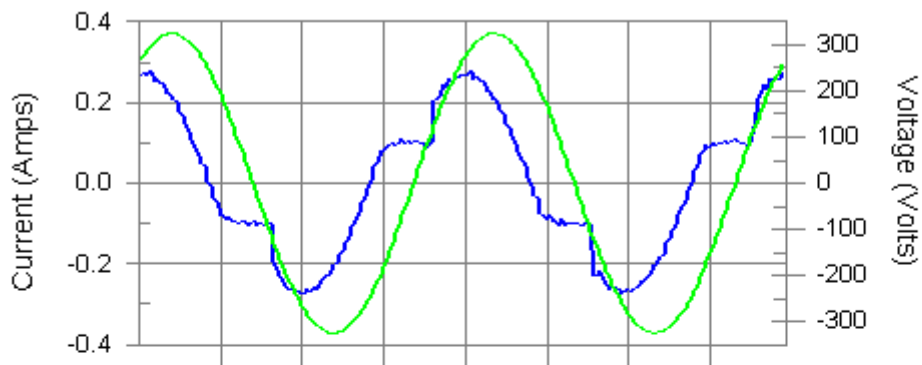

**Harmonics and Class D limit line      European Limits**

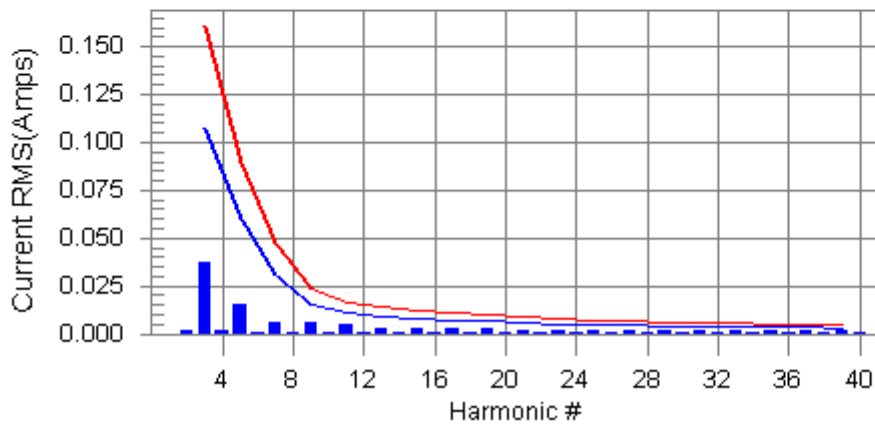

**Test result: N/L      Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit**

## Current Test Result Summary (Run time)

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

## Highest parameter values during test:

V_RMS (Volts): 229.95	Frequency(Hz): 50.00
I_Peak (Amps): 0.307	I_RMS (Amps): 0.184
I_Fund (Amps): 0.174	CrestFactor: 2.296
Power(Watts): 31.5	PowerFactor: 0.770

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.016	0.000	N/A	N/L
3	0.037	0.107	N/A	0.038	0.160	N/A	N/L
4	0.001	0.000	N/A	0.009	0.000	N/A	N/L
5	0.015	0.060	N/A	0.016	0.090	N/A	N/L
6	0.001	0.000	N/A	0.007	0.000	N/A	N/L
7	0.006	0.031	N/A	0.007	0.047	N/A	N/L
8	0.001	0.000	N/A	0.006	0.000	N/A	N/L
9	0.006	0.016	N/A	0.008	0.024	N/A	N/L
10	0.001	0.000	N/A	0.005	0.000	N/A	N/L
11	0.005	0.011	N/A	0.006	0.017	N/A	N/L
12	0.001	0.000	N/A	0.005	0.000	N/A	N/L
13	0.003	0.009	N/A	0.004	0.014	N/A	N/L
14	0.001	0.000	N/A	0.004	0.000	N/A	N/L
15	0.003	0.008	N/A	0.004	0.012	N/A	N/L
16	0.000	0.000	N/A	0.004	0.000	N/A	N/L
17	0.003	0.007	N/A	0.004	0.011	N/A	N/L
18	0.000	0.000	N/A	0.004	0.000	N/A	N/L
19	0.002	0.006	N/A	0.003	0.010	N/A	N/L
20	0.000	0.000	N/A	0.003	0.000	N/A	N/L
21	0.002	0.006	N/A	0.003	0.009	N/A	N/L
22	0.000	0.000	N/A	0.003	0.000	N/A	N/L
23	0.002	0.005	N/A	0.003	0.008	N/A	N/L
24	0.000	0.000	N/A	0.003	0.000	N/A	N/L
25	0.002	0.005	N/A	0.003	0.007	N/A	N/L
26	0.000	0.000	N/A	0.003	0.000	N/A	N/L
27	0.002	0.004	N/A	0.002	0.007	N/A	N/L
28	0.001	0.000	N/A	0.002	0.000	N/A	N/L
29	0.002	0.004	N/A	0.002	0.006	N/A	N/L
30	0.000	0.000	N/A	0.002	0.000	N/A	N/L
31	0.002	0.004	N/A	0.002	0.006	N/A	N/L
32	0.001	0.000	N/A	0.002	0.000	N/A	N/L
33	0.001	0.004	N/A	0.002	0.005	N/A	N/L
34	0.000	0.000	N/A	0.002	0.000	N/A	N/L
35	0.002	0.003	N/A	0.002	0.005	N/A	N/L
36	0.000	0.000	N/A	0.002	0.000	N/A	N/L
37	0.001	0.003	N/A	0.002	0.005	N/A	N/L
38	0.000	0.000	N/A	0.002	0.000	N/A	N/L
39	0.001	0.003	N/A	0.002	0.005	N/A	N/L
40	0.000	0.000	N/A	0.001	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Highest parameter values during test:**

Voltage (Vrms): 229.95	Frequency(Hz): 50.00
I_Peak (Amps): 0.307	I_RMS (Amps): 0.184
I_Fund (Amps): 0.174	CrestFactor: 2.296
Power (Watts): 31.5	PowerFactor: 0.770

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.116	0.460	25.17	OK
3	0.524	2.069	25.34	OK
4	0.064	0.460	13.90	OK
5	0.064	0.920	7.00	OK
6	0.036	0.460	7.79	OK
7	0.031	0.690	4.51	OK
8	0.022	0.460	4.89	OK
9	0.049	0.460	10.62	OK
10	0.021	0.460	4.54	OK
11	0.023	0.230	9.79	OK
12	0.016	0.230	6.88	OK
13	0.018	0.230	7.80	OK
14	0.015	0.230	6.59	OK
15	0.014	0.230	6.20	OK
16	0.018	0.230	8.03	OK
17	0.012	0.230	5.42	OK
18	0.014	0.230	6.21	OK
19	0.011	0.230	4.82	OK
20	0.017	0.230	7.52	OK
21	0.013	0.230	5.46	OK
22	0.013	0.230	5.45	OK
23	0.008	0.230	3.68	OK
24	0.005	0.230	2.32	OK
25	0.008	0.230	3.33	OK
26	0.008	0.230	3.57	OK
27	0.006	0.230	2.62	OK
28	0.007	0.230	3.05	OK
29	0.005	0.230	2.35	OK
30	0.006	0.230	2.69	OK
31	0.004	0.230	1.52	OK
32	0.005	0.230	2.19	OK
33	0.008	0.230	3.27	OK
34	0.004	0.230	1.56	OK
35	0.005	0.230	1.96	OK
36	0.003	0.230	1.48	OK
37	0.006	0.230	2.63	OK
38	0.003	0.230	1.34	OK
39	0.005	0.230	2.39	OK
40	0.006	0.230	2.61	OK

## 5.2 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST

### 5.2.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	$\leq 1.0$ , $T_p= 10$ min.	Short Term Flicker Indicator
Plt	$\leq 0.65$ , $T_p=2$ hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	$\leq 500$ ms	Relative V-change characteristic

### 5.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 10, 2022
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 10, 2022
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.


All calibration period of equipment list is one year.

### 5.2.3 TEST PROCEDURE

- a. Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- b. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation

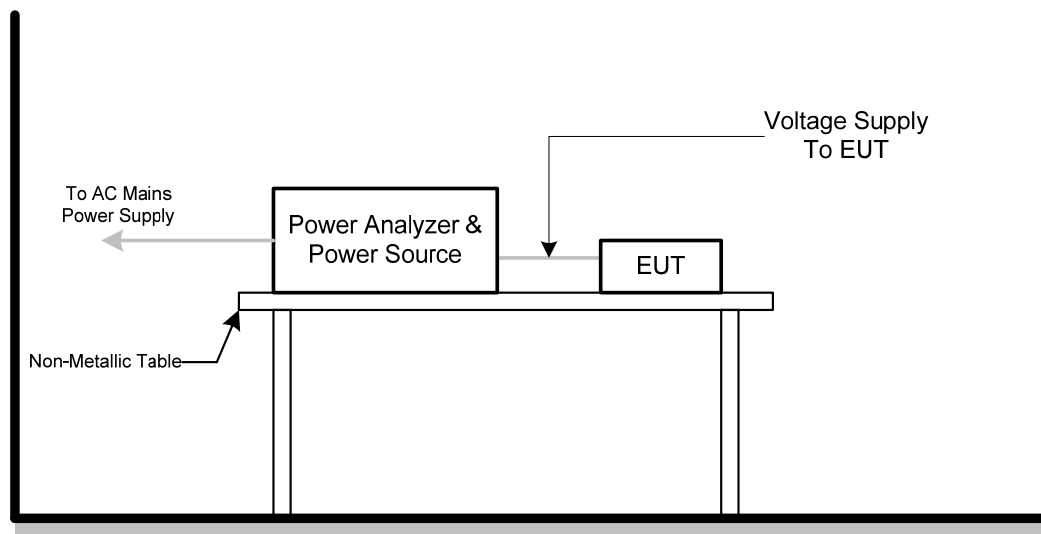**5.2.5 TEST SETUP**

### 5.2.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Pst<sub>t</sub> and limit line**

**European Limits**



**Plt and limit line**



**Parameter values recorded during the test:**

Vrms at the end of test (Volt): 229.88

Highest dt (%):

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.273

Highest Plt (2 hr. period): 0.119

Test limit (%):

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass

## 6. EMC IMMUNITY TEST

### 6.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances, swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances, spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports <b>(NOTE 2)</b>	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports <b>(NOTE 2)</b>	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	<b>Port Type: unshielded symmetrical</b>		
	<b>Apply: lines to ground</b>		
	<b>Primary protection is Intended</b> ±1 kV 10/700(5/320)Tr/Th µs	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	C
	<b>Primary protection is not Intended</b> ±1 kV 10/700(5/320) Tr/Th µs		C
	<b>Port type: coaxial or shielded</b>		
	<b>Apply: shield to ground</b>		
±0.5 kV 1.2/50(8/20) Tr/Th µs	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	B	
<b>line to reference ground for each individual line:</b> ±0.5 kV(peak) 1.2/50(8/20) Tr/Th µs	DC network power ports <b>(NOTE 2)</b>	B	
±1 kV(peak) 1.2/50(8/20) Tr/Th µs (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th µs (line to earth or ground)	AC mains power ports	B	
Continuous induced RF disturbances IEC 61000-4-6 (CS)	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Analogue/digital data ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC network power ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC mains power ports	A



Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage < 5% 0.5 cycle Residual voltage < 70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage < 5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances, repetitive (BIN-R)	0.15MHz to 0.5 MHz 107dBuV 0.5 MHz to 10 MHz 107dBuV to 36dBuV 10 MHz to 30 MHz 36dBuV to 30 dBuV	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	A
	0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports <b>(Apply period based on the AC mains frequency)</b>	A
Broadband impulse noise disturbances, isolated (BIN-I)	0.15MHz to 30 MHz 110dBuV	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports <b>(Apply all burst durations)</b>	B

**Note.**

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

## 6.2 GENERAL PERFORMANCE CRITERIA

According to **EN55035** standard, the general performance criteria as following:

<p><b>Criterion A</b></p>	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<p><b>Criterion B</b></p>	<p>During the application of the disturbance, degradation of performance is allowed. However, nonintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<p><b>Criterion C</b></p>	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Areboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

## 6.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION

### 6.3.1 PERFORMANCE CRITERIA

#### Performance criterion A

##### for continuous radiated and conducted disturbances tests:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA. Additionally, an increase in any degradation greater than

just perceptible by observation of the image shall not occur as a consequence of the application of the test. Examples of such degradations are:

- superimposed patterning;
- positional disturbances due to synchronisation errors;
- geometric distortion;
- change of contrast or brightness;
- picture artefacts;
- freezing or disturbance of motion;
- image loss;
- video data or decoding errors.

#### Performance criterion A

##### for the power frequency magnetic field tests:

Alternative 1: A continuous magnetic field of 1 A/m:

The jitter (in mm) shall not exceed the value  $\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$

#### Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA.

#### Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

## 6.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION

### 6.4.1 PERFORMANCE CRITERIA

#### Performance criterion A:

For devices that support telephony functions the limits of Table G.3 shall apply.

With respect to Table G.3:

- the interference ratio (electrical or acoustic) shall meet the limits in column 3; or,
- the acoustic level of the demodulated audio shall be less than the limits in column 4; or,
- the digitally coded level of demodulated audio shall be less than limits in column 5; or,
- the analogue level of the demodulated audio shall be less than the limits in column 6.

**Table G.3 – Performance criterion A – Limits for devices supporting telephony**

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB (SPL)	Digital dBm0	Analogue dBm
Conducted	0,15 to 30	-20 dB	55	-50	-50
	30 to 80	-10 dB	65	-40	-40
Radiated	80 to 1000	0 dB	75	-30	-30

For terminals connected to digital wired network ports (such as Ethernet, ISDN), measurements of the demodulated 1 kHz may be performed on a remote AE, ideally of the same design.

For all other devices:

The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

#### Performance criterion B:

Use the general performance criterion B. See GENERAL PERFORMANCE CRITERIA.

#### Performance criterion C:

Use the general performance criterion C. See GENERAL PERFORMANCE CRITERIA.

## 6.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 6.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ Contact Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

### 6.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Dec. 01, 2022

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.5.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- b. For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

### 6.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 6.5.5 TEST SETUP

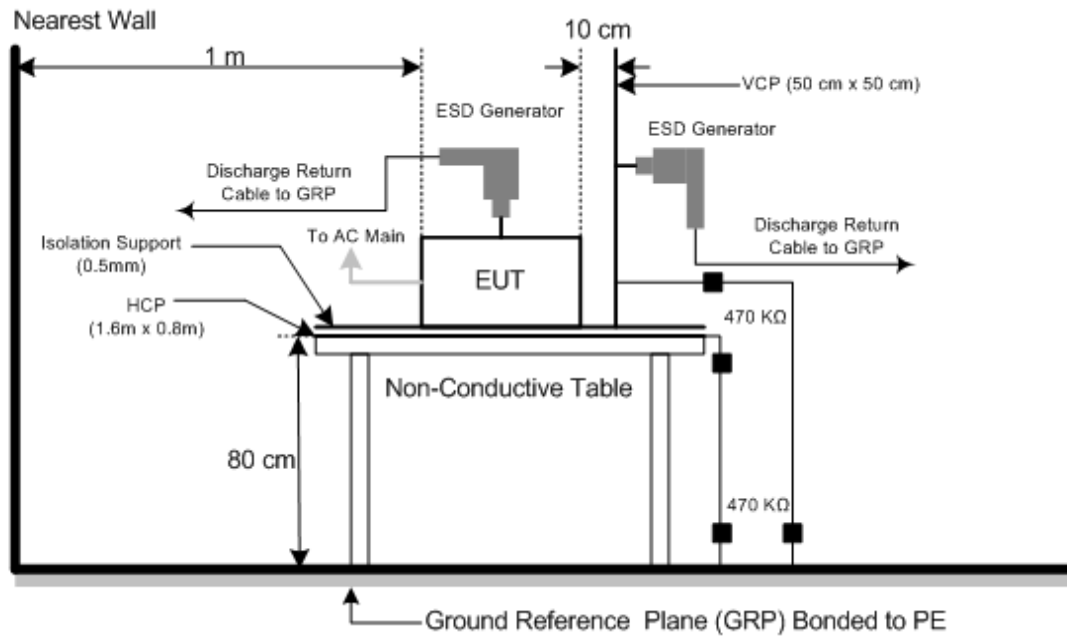

### 6.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9, Mode 10



Mode	Air Discharge						Contact Discharge					
	2kV		4kV		8kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	B	B	A	A	B	B	-	-
2	A	A	A	A	B	B	A	A	A	A	-	-
3	A	A	A	A	B	B	-	-	-	-	-	-
Criteria	B						B					
Result	B						B					

Mode	HCP Contact Discharge						VCP Contact Discharge					
	2kV		4kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	A	A	B	B	-	-	A	A	A	A	-	-
Right side	A	A	A	A	-	-	A	A	A	A	-	-
Front side	A	A	B	B	-	-	A	A	B	B	-	-
Rear side	A	A	A	A	-	-	A	A	B	B	-	-
Criteria	B						B					
Result	B						B					


Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

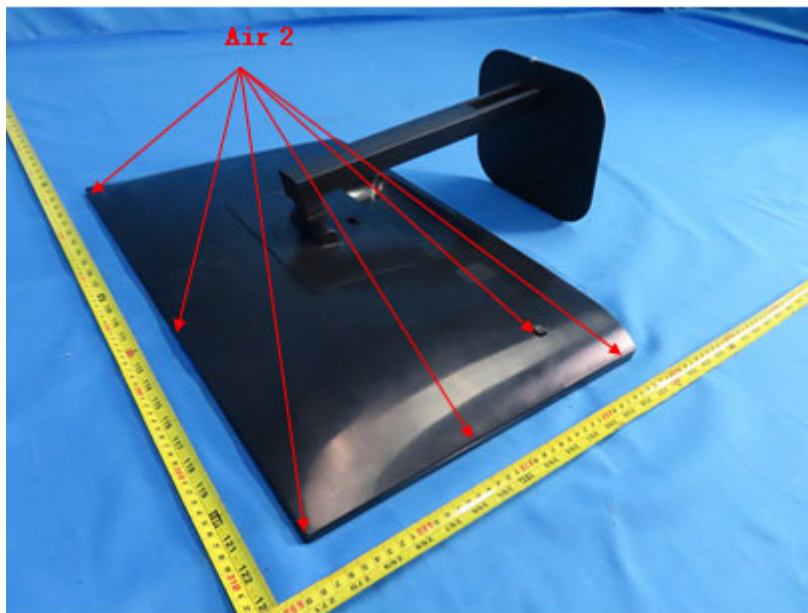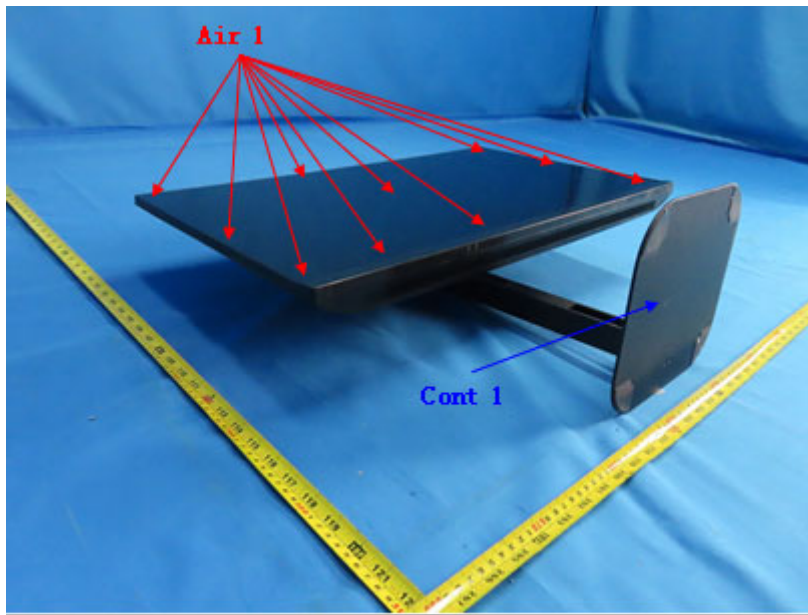



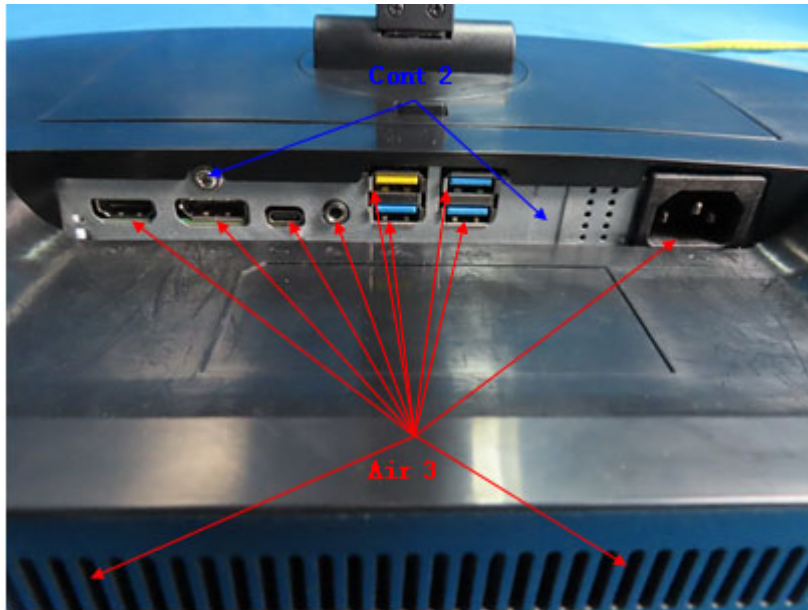

## 6.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 6.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz(±1%)
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

### 6.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Antenna	EMCO	3142C	66462	Mar. 26, 2022
2	Amplifier	AR	50S1G4A	326720	Jan. 23, 2023
3	Power amplifier	MILMEGA	AS1860-50	1064834	Jan. 23, 2023
4	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	9149-277	Apr. 14, 2022
5	Power amplifier	MILMEGA	80RF1000-250	1064833	Jan. 23, 2023
6	Measurement Software	Farad	(EZ-RS ) V2.0.1.3	N/A	N/A
7	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Jul. 10, 2022
8	Conditioning Amplifier	B&K	_2690__0F2_	2723746	Jun. 10, 2022
9	Free-field 1/2` Microphone	B&K	4190-L-001	2878077	Jun. 10, 2022
10	UPV Audio Analyzer	R&S	UPV	104259	Jan. 23, 2023

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.6.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

The other condition as following manner:

- The field strength level was 3 V/m(unmodulated, r.m.s).
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Display and display output functions:

- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output. the diagonal screen size shall be at least 0,50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

For Acoustic measurements:


- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of  $L_0$ . (BTL lab uses the software to take  $L_0$  as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of  $L_1$ .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:  
 Acoustic interference ratio =  $L_1 - L_0$ .  
 (For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio =  $L_1 - L_0$ ).

#### 6.6.4 DEVIATION FROM TEST STANDARD

No deviation


#### 6.6.5 TEST SETUP

- a) For Continuous induced RF disturbances

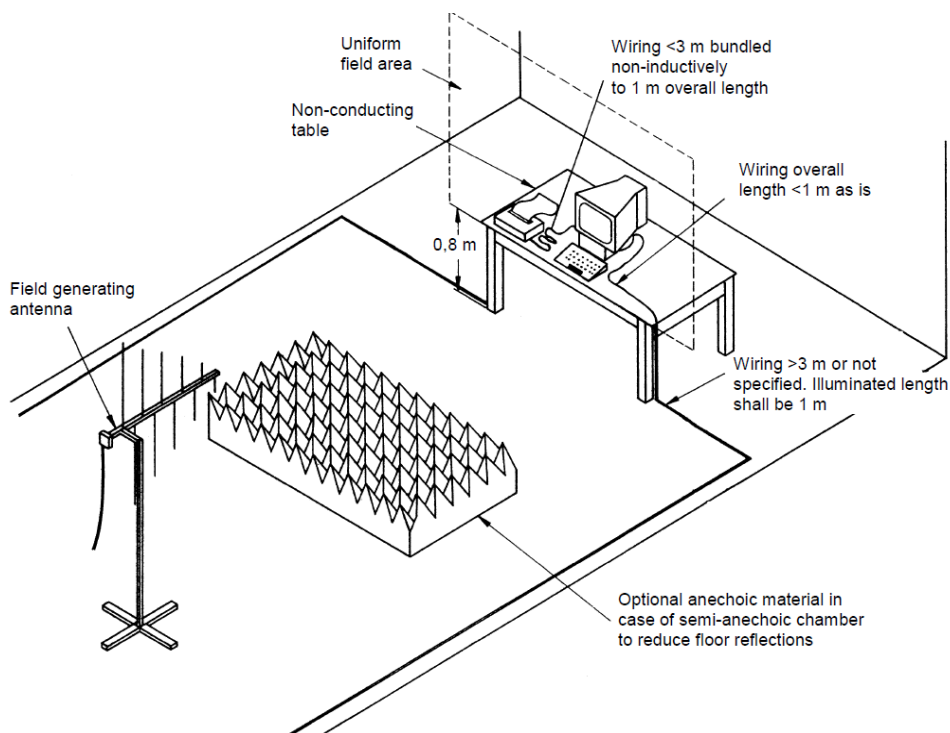


**For Audio output function**

(1) Audio output port

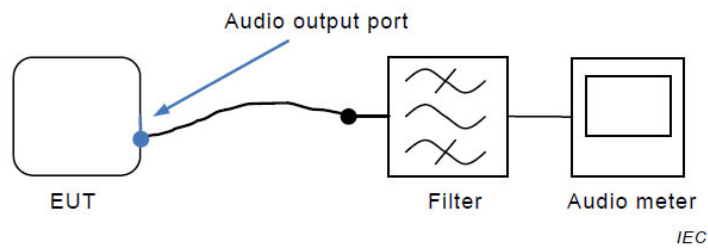

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

(2) Loudspeaker

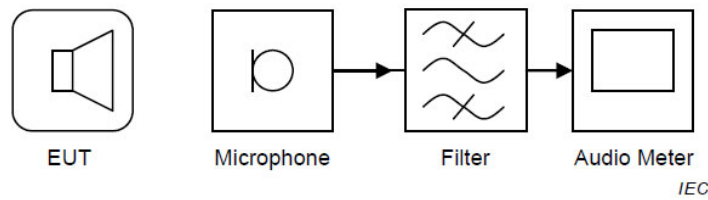

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

### 6.6.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9, Mode 10

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		


**For Audio output function**

(1) Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Front_Vertical

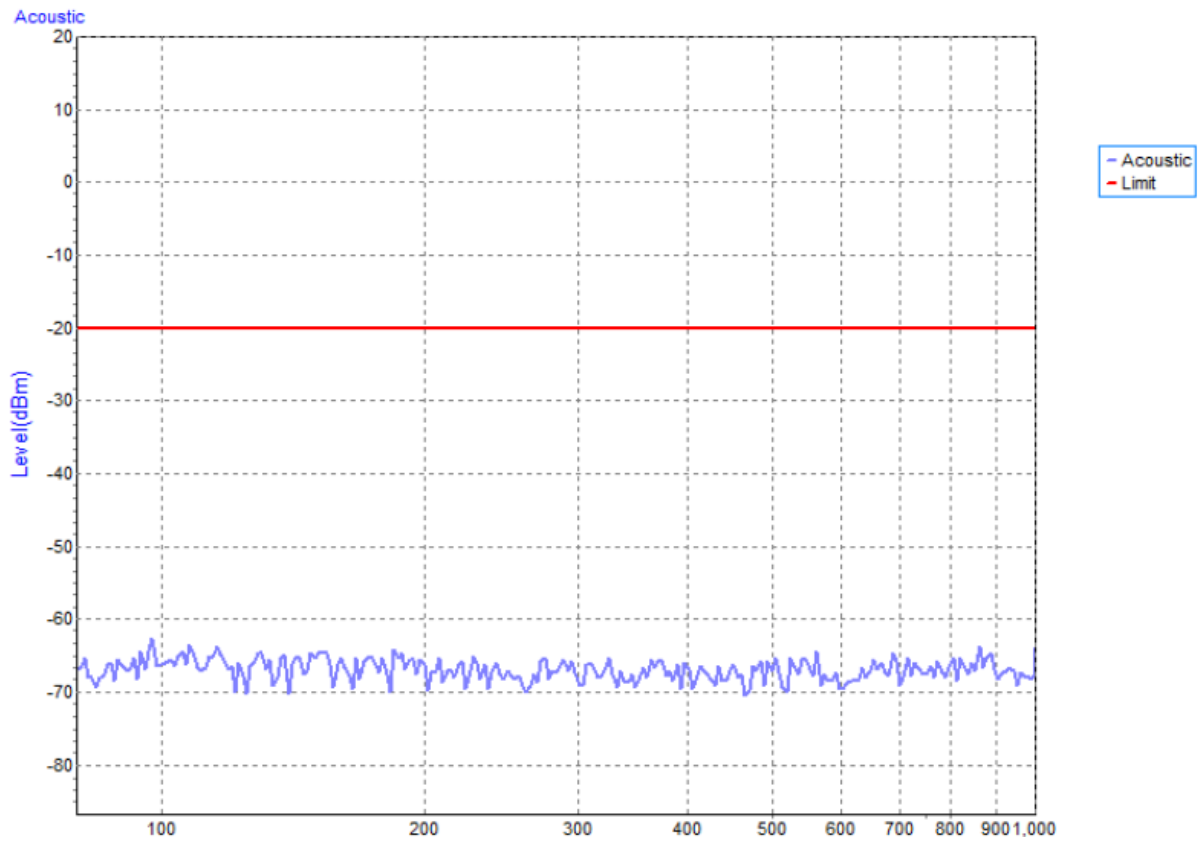


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Front_Horizontal

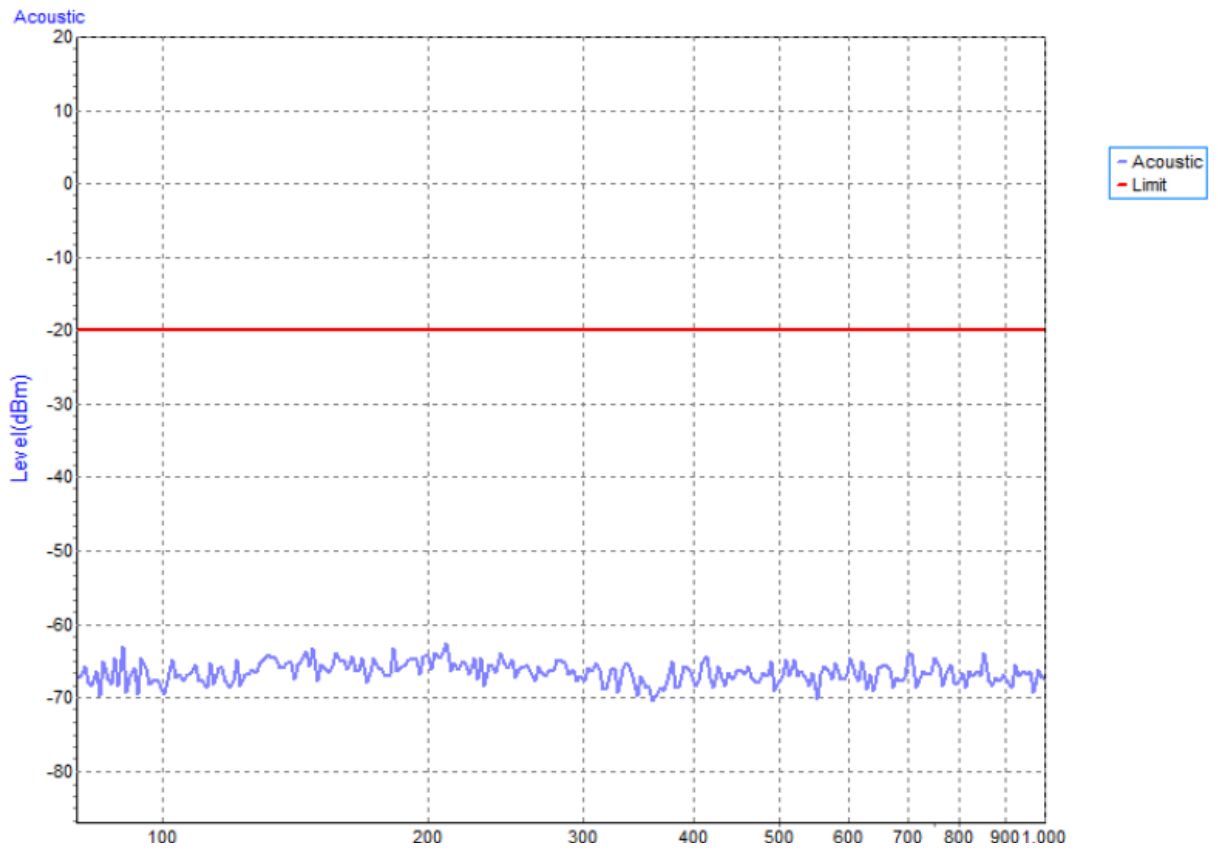


(2) Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Front_Vertical

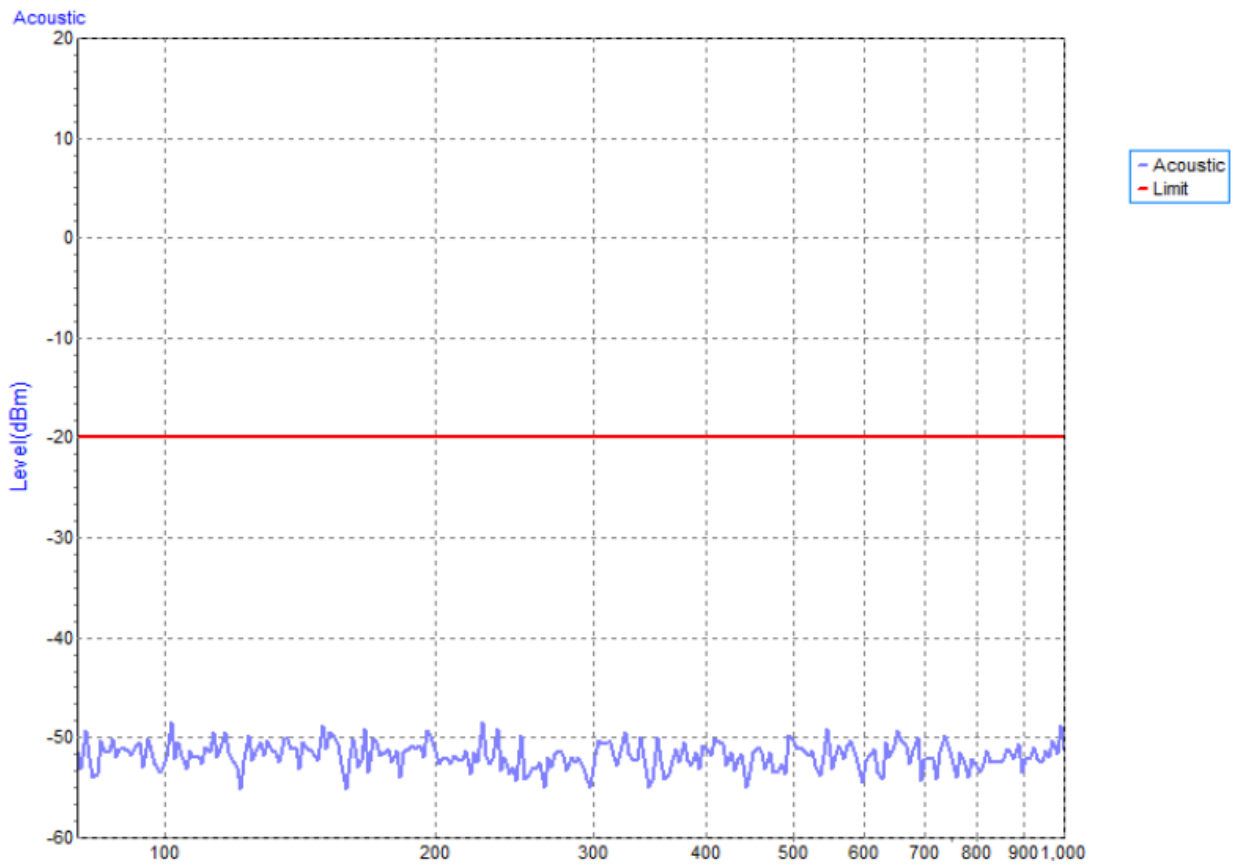



Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Front_Horizontal

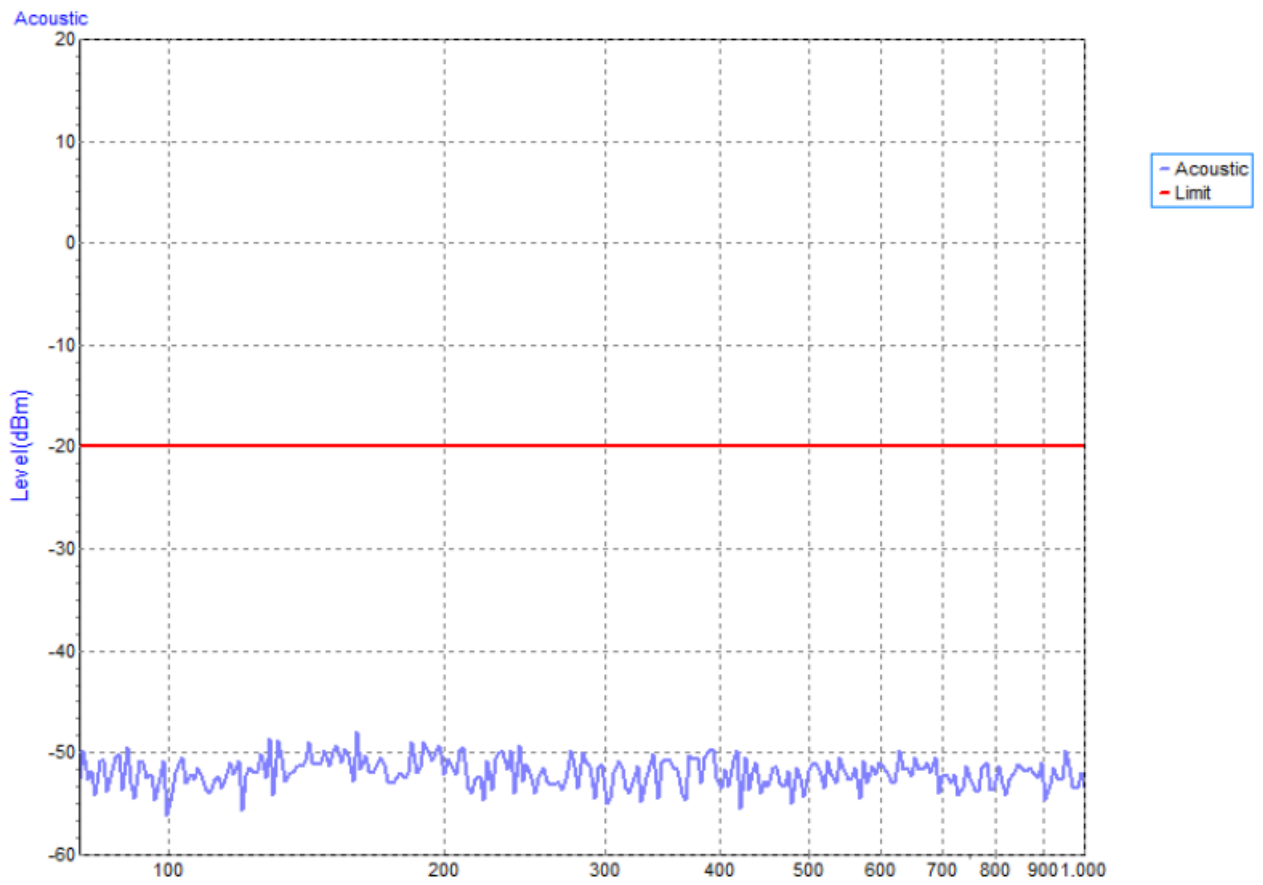

## 6.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)

### 6.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC Power Ports:±1 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz: except for xDSL ports.
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

### 6.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	Jul. 10, 2022
2	EFT	Prima	EFT_Series V1.0.0.0.201 80710	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.7.3 TEST PROCEDURE

For TABLE-TOP equipment:


The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m+/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

The other condition as following manner:

- a. Both positive and negative polarity discharges were applied.
- b. The duration time of each test sequential was 1 minute.

### 6.7.4 DEVIATION FROM TEST STANDARD

No deviation

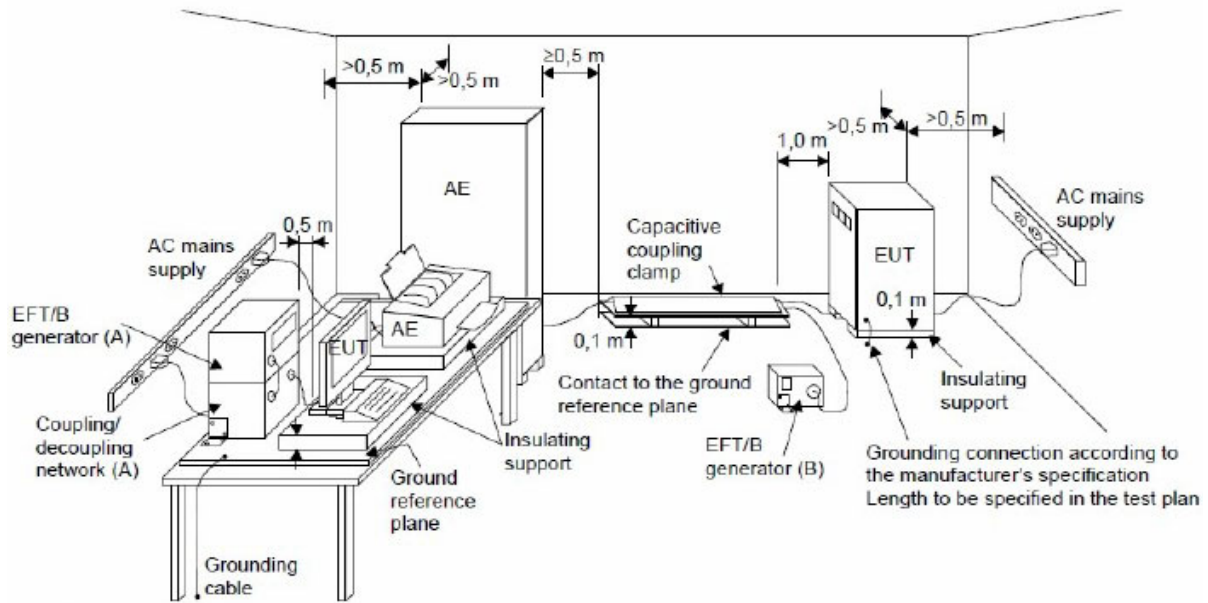**6.7.5 TEST SETUP**

**6.7.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9, Mode 10

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				1kV		
AC Power Port	Line (L)	+	5 kHz	B	B	B
		-	5 kHz	B		
	Neutral (N)	+	5 kHz	B	B	B
		-	5 kHz	B		
	Ground (PE)	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+N	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+PE	+	5 kHz	B	B	B
		-	5 kHz	B		
	N+PE	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+N+PE	+	5 kHz	B	B	B
		-	5 kHz	B		

## 6.8 SURGE IMMUNITY TEST

### 6.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B
Wave-Shape	1.2/50(8/20) Tr/Th $\mu$ s combination wave
Test Voltage	AC Power Port: $\pm 0.5$ kV, $\pm 1$ kV, $\pm 2$ kV
Generator Source Impedance	2 $\Omega$ of the low-voltage power supply network. 12 $\Omega$ (10 $\Omega$ +2 $\Omega$ ) of the low-voltage power supply network and ground.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90° phase Five negative pulses line-to-neutral at 270° phase Five positive pulses line-to-earth at 90° phase Five negative pulses line-to-earth at 270° phase Five negative pulses neutral-to-earth at 90° phase Five positive pulses neutral-to-earth at 270° phase
Pulse Repetition Rate	1 time / min.

### 6.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	Jul. 10, 2022
2	Surge	Prima	SUG_Series V1.0.0.7.2019 0827	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.8.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

#### 6.8.4 DEVIATION FROM TEST STANDARD

No deviation

#### 6.8.5 TEST SETUP

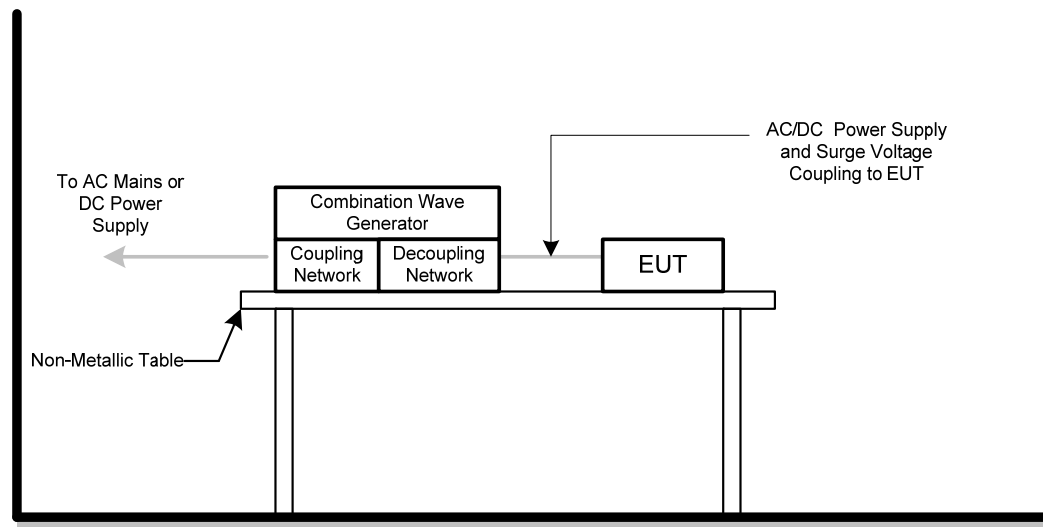

**6.8.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9, Mode 10

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th $\mu$ s						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	-- kV	-- kV		
AC	L – N	+	90°	B	B	-	-	B	B
		-	270°	B	B	-	-		

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th $\mu$ s						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	2kV	-- kV		
AC	L – PE	+	90°	B	B	B	-	B	B
		-	270°	B	B	B	-		
	N – PE	-	90°	B	B	B	-	B	B
		+	270°	B	B	B	-		

## 6.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

### 6.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Dwell Time	3 seconds

### 6.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Power CDN	FCC	FCC-801-M2/M3-16A	100270	Jan. 23, 2023
2	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jul. 10, 2022
3	Measurement Software	Farad	EZ-CS (V2.0.1.4)	N/A	N/A
4	Conditioning Amplifier	B&K	2690_0F2	2723746	Jun. 10, 2022
5	Free-field 1/2" Microphone	B&K	4190-L-001	2878077	Jun. 10, 2022
6	UPV Audio Analyzer	R&S	UPV	104259	Jan. 23, 2023

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.9.3 TEST PROCEDURE

The equipment to be tested is placed on an insulating support of 0.1m height above a reference ground plane. All cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

The other condition as following manner:

- The field strength level was 3 V (unmodulated, r.m.s.)
- The frequency range is swept from 150 kHz to 80 MHz, with the signal 80% amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

For Display and display output functions:

- The display quality evaluated by direct observation.
- For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output. the diagonal screen size shall be at least 0,50 m.
- The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.




For Acoustic measurements:

- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of  $L_0$ . (BTL lab uses the software to take  $L_0$  as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of  $L_1$ .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:  
 Acoustic interference ratio =  $L_1 - L_0$ .  
 (For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio =  $L_1 - L_0$ ).

#### 6.9.4 DEVIATION FROM TEST STANDARD


No deviation

#### 6.9.5 TEST SETUP

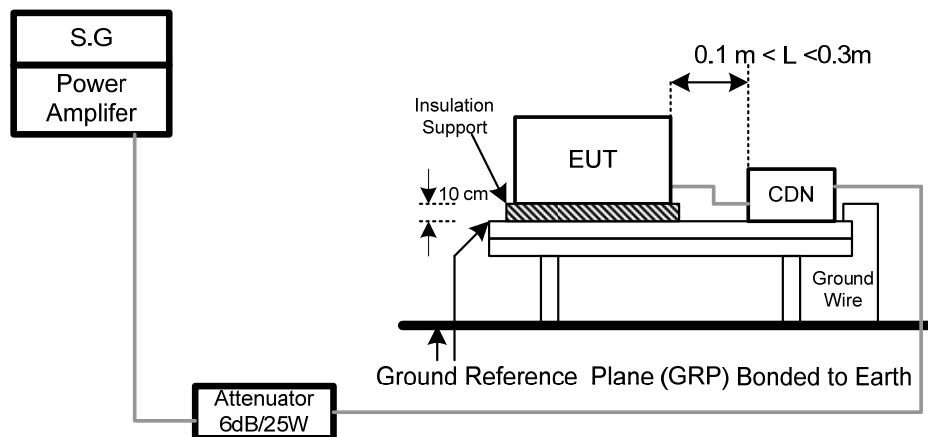


**For Audio output function**

(1) Audio output port

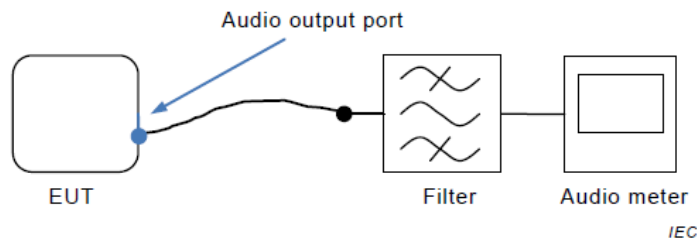

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

(2) Loudspeaker

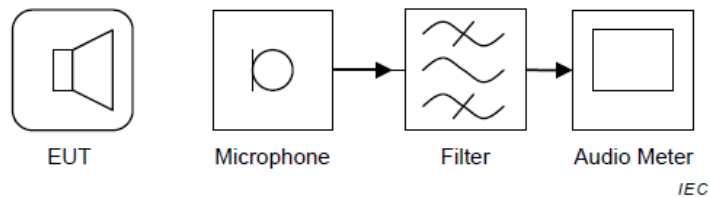

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.


### 6.9.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9, Mode 10

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			


(1) Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

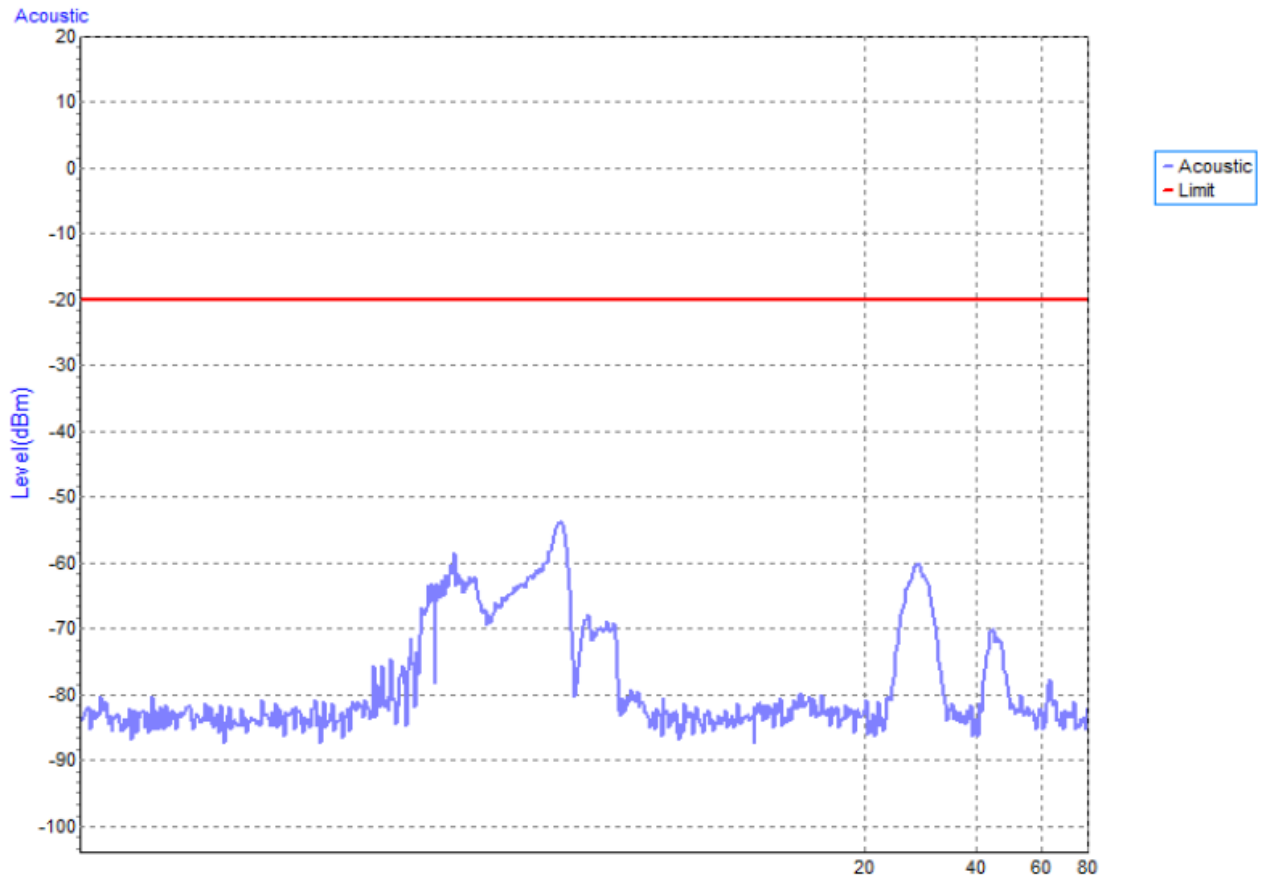

## (2) Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

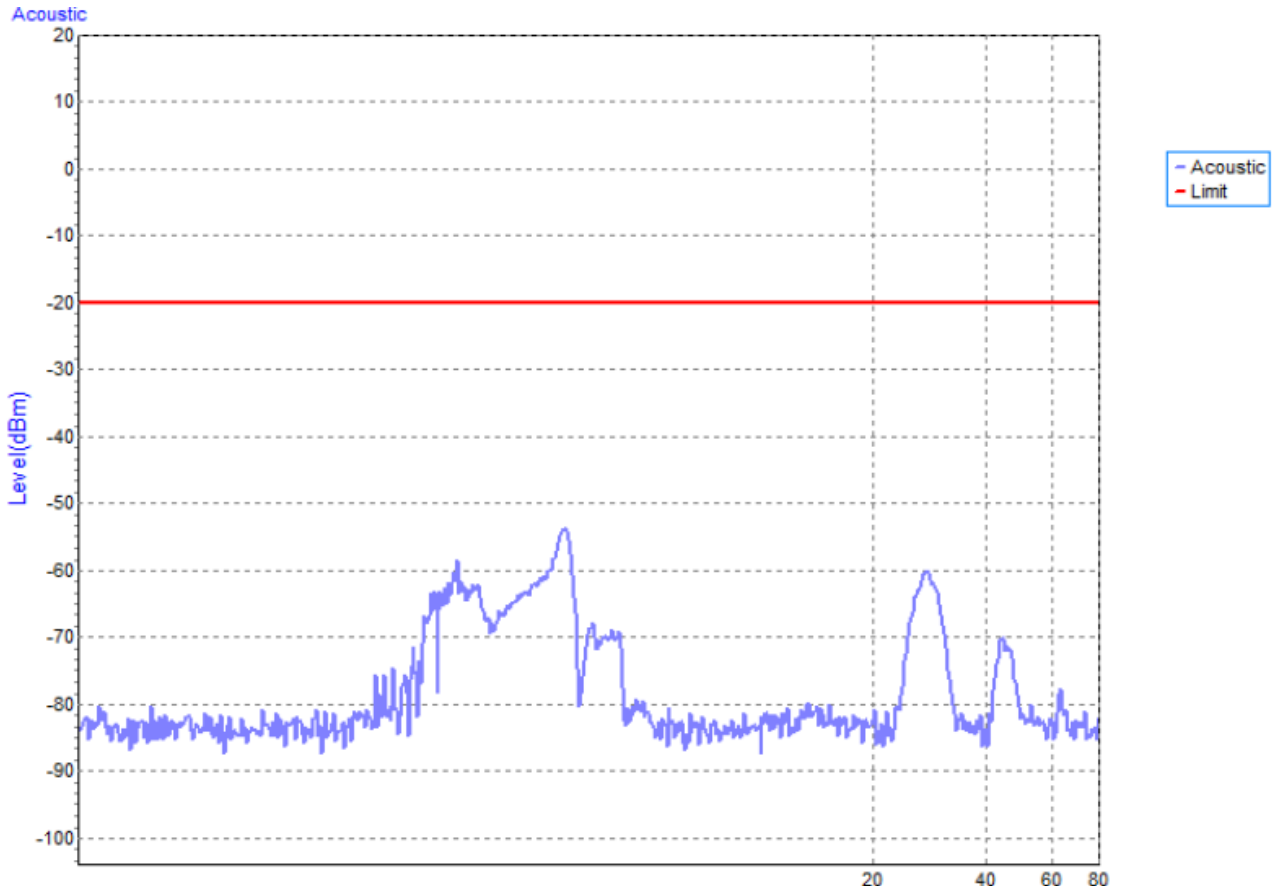

## 6.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

### 6.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60 Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

### 6.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Jan. 23, 2023
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	4024	Jan. 23, 2023

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.10.3 TEST PROCEDURE

For TABLE-TOP equipment:


The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

The other condition as following manner:

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 6.10.4 DEVIATION FROM TEST STANDARD

No deviation

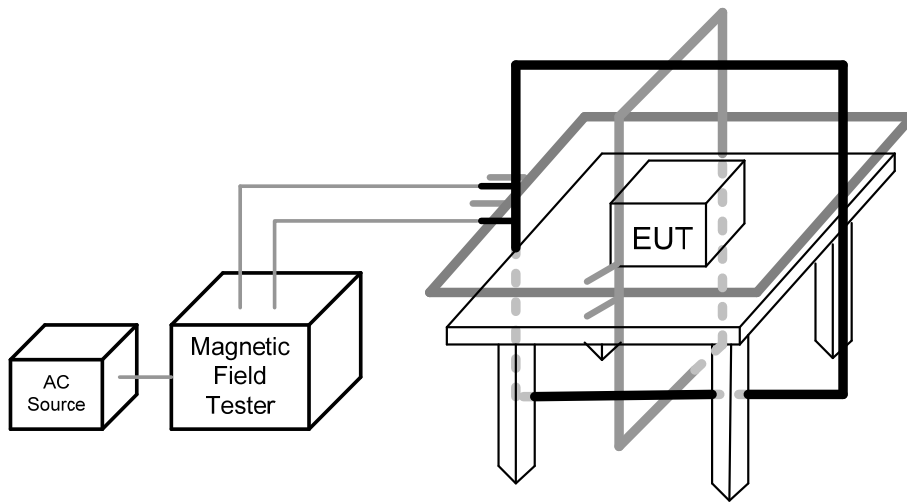**6.10.5 TEST SETUP**

### 6.10.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9, Mode 10

#### 50Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results
Enclosure	1 A/m	X	60	A	A
Enclosure	1 A/m	Y	60	A	A
Enclosure	1 A/m	Z	60	A	A

#### 60Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results
Enclosure	1 A/m	X	60	A	A
Enclosure	1 A/m	Y	60	A	A
Enclosure	1 A/m	Z	60	A	A



## 6.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

### 6.11.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

### 6.11.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	Dec. 01, 2022
2	Measurement Software	Prima	DRP_Series V1.0.0.3.201 90123	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.


All calibration period of equipment list is one year.

### 6.11.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

### 6.11.4 DEVIATION FROM TEST STANDARD

No deviation

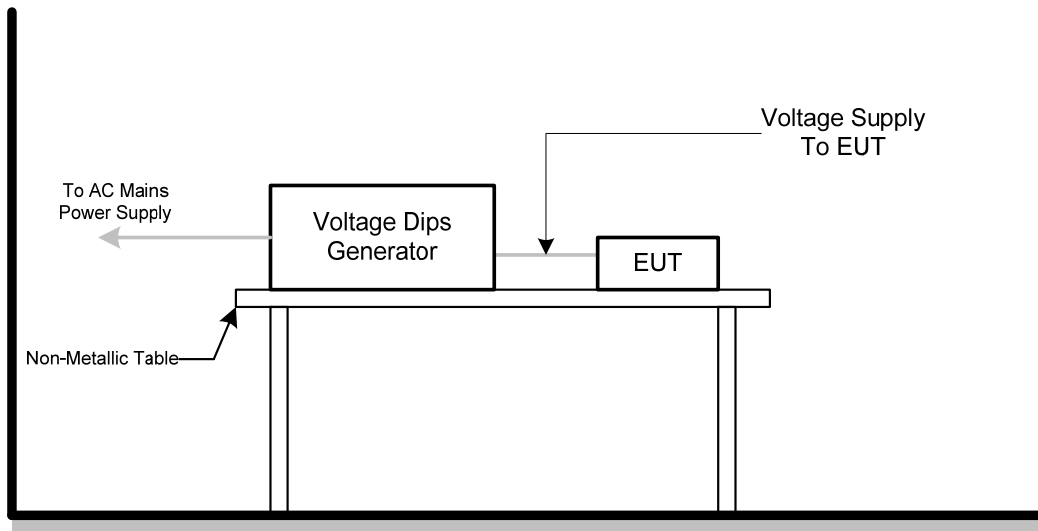**6.11.5 TEST SETUP**

**6.11.6 TEST RESULTS**

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-6, Mode 9, Mode 10

AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



**7. EUT TEST PHOTO**

EN 55032:2015

Radiated emissions up to 1 GHz

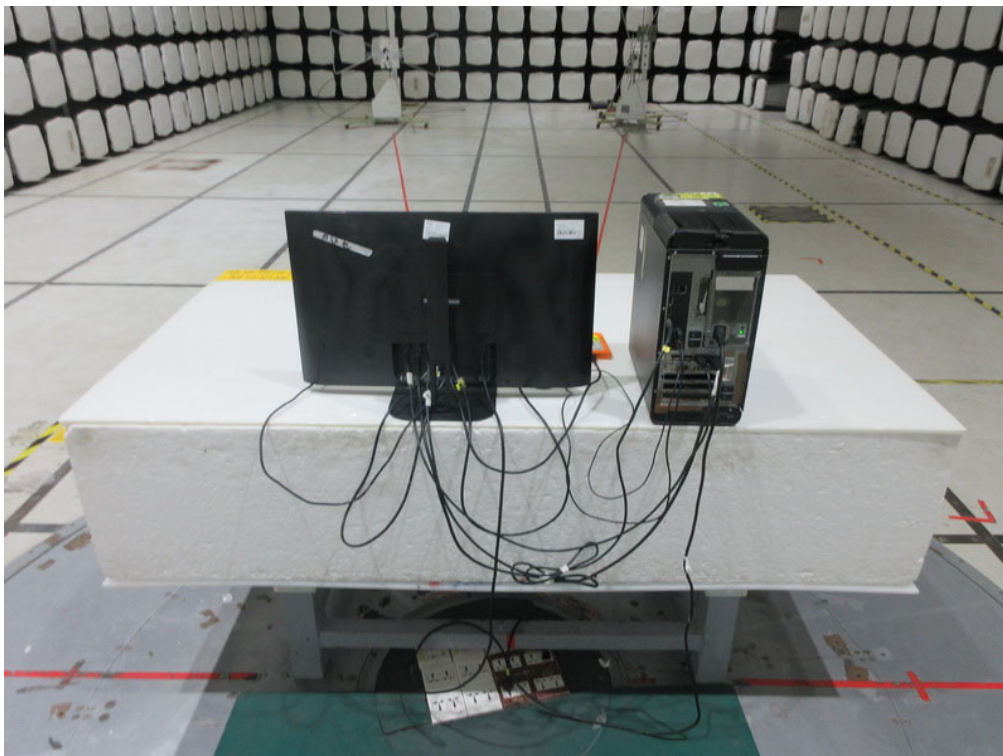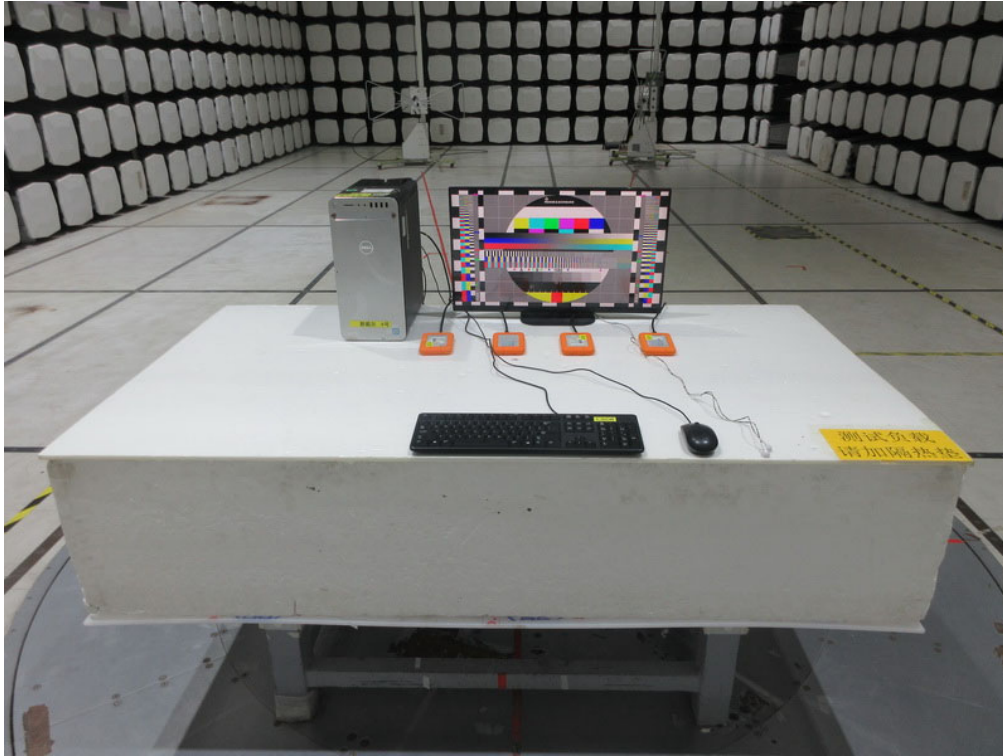

Radiated emissions above 1 GHz

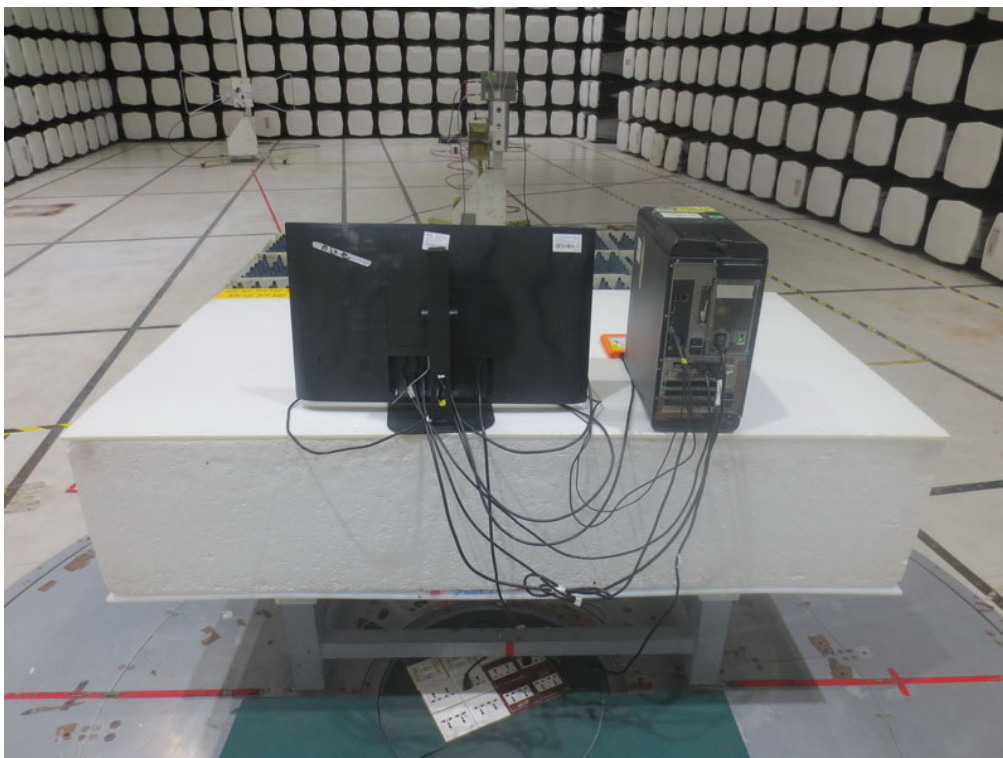
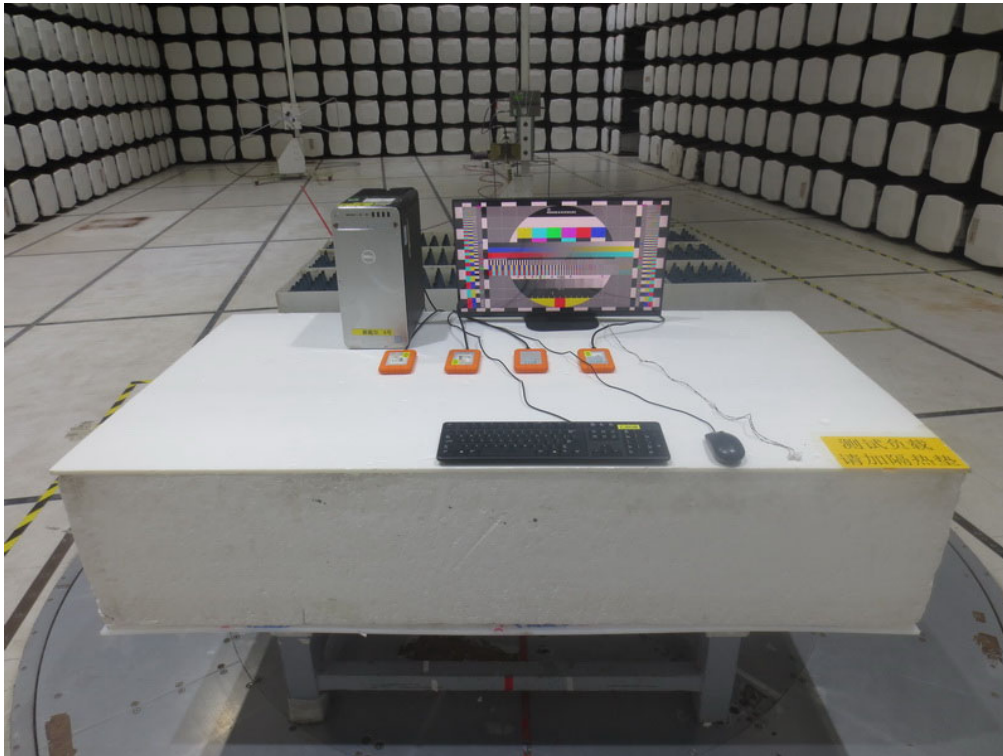


## Conducted emissions AC mains power port





EN 55032:2015+A11:2020/EN 55032:2015+A1:2020

Radiated emissions up to 1 GHz

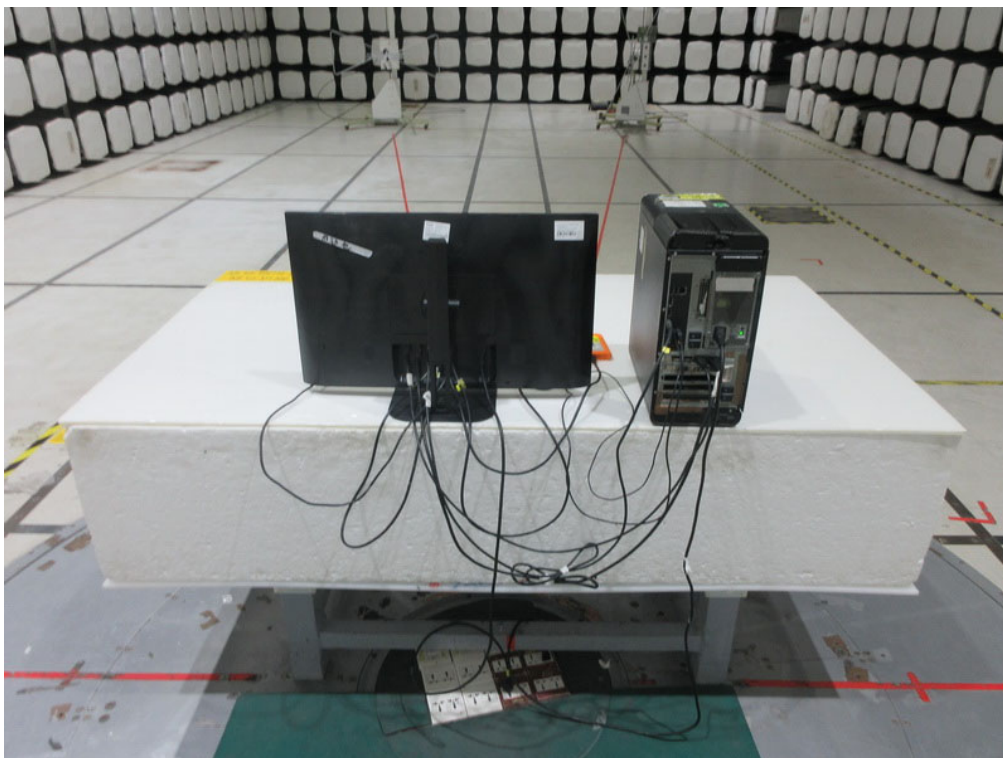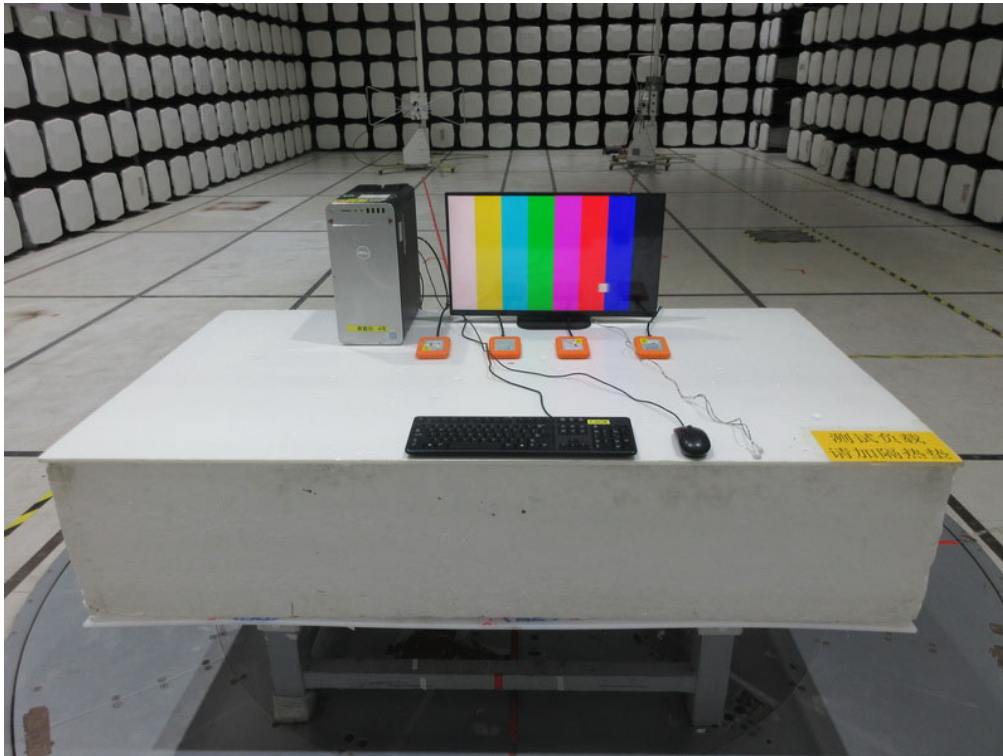

## Radiated emissions above 1 GHz

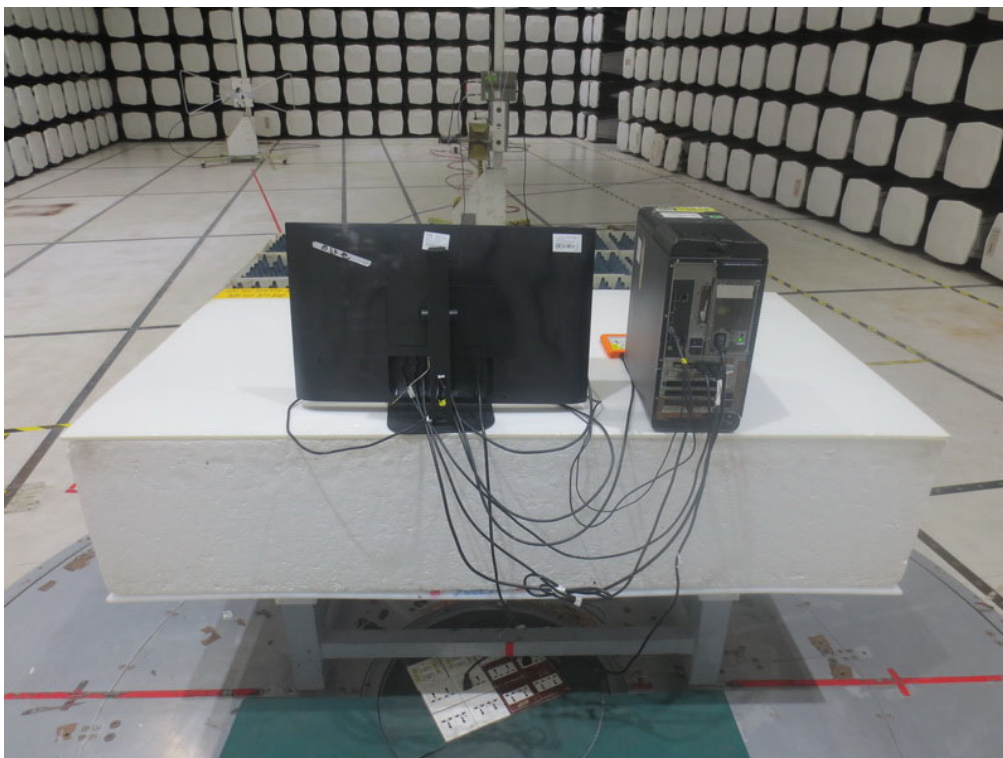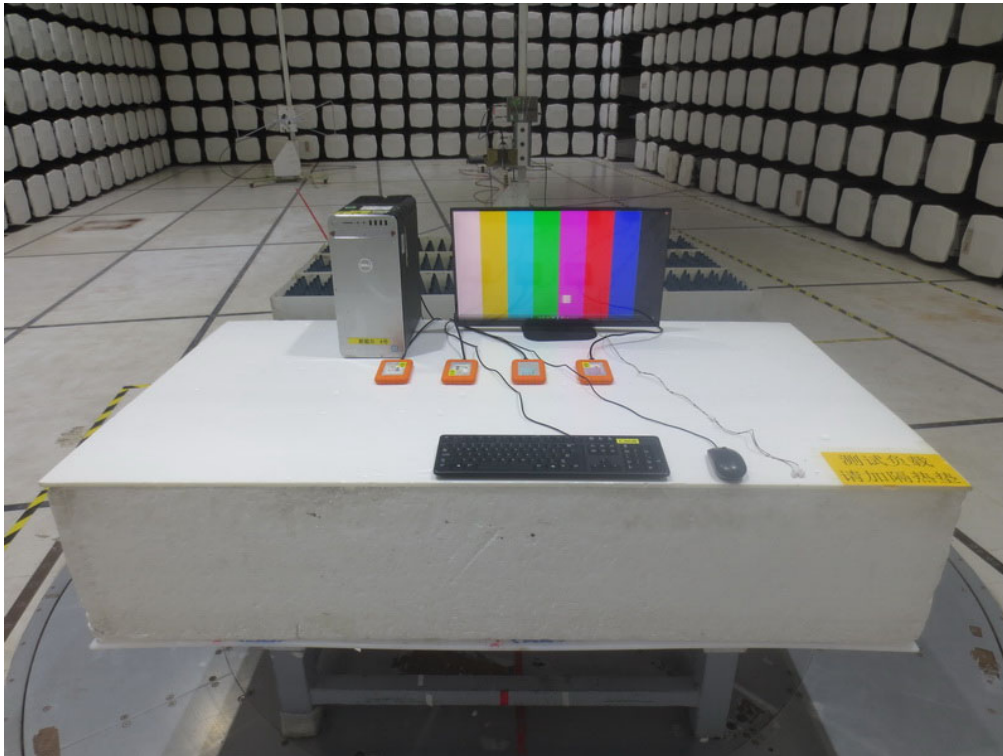



## Conducted emissions AC mains power port



## Harmonic current emissions




## Voltage fluctuations (Flicker)




Electrostatic discharge immunity



Radiated, radio-frequency, electromagnetic field immunity – up to 1GHz

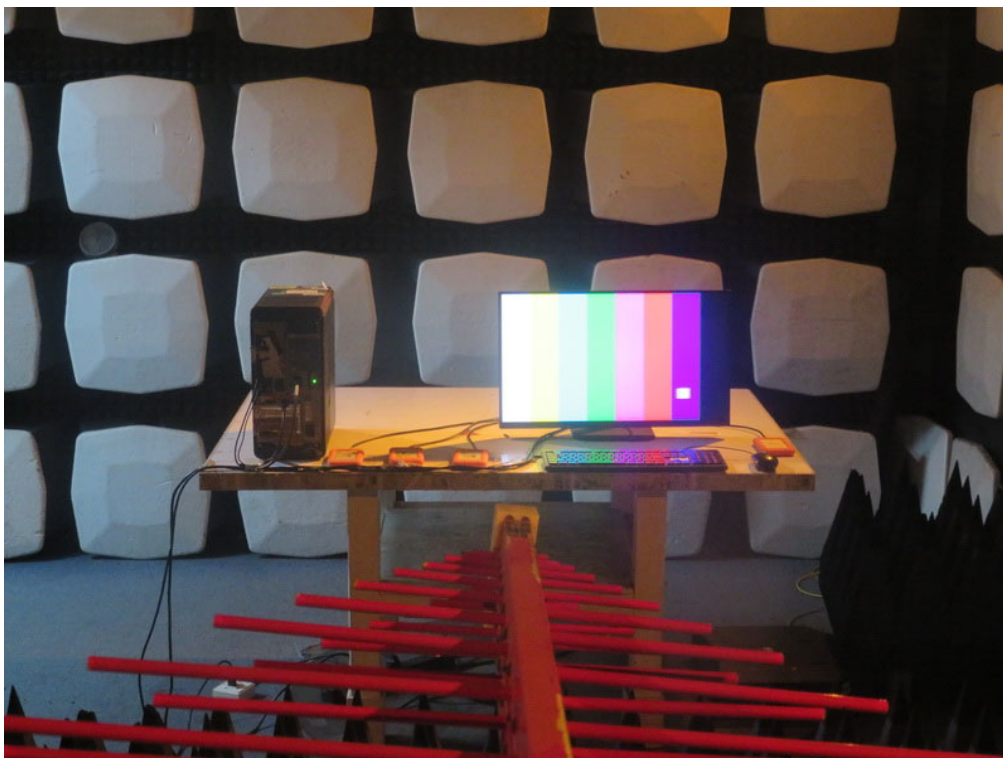

Radiated, radio-frequency, electromagnetic field immunity – above 1GHz

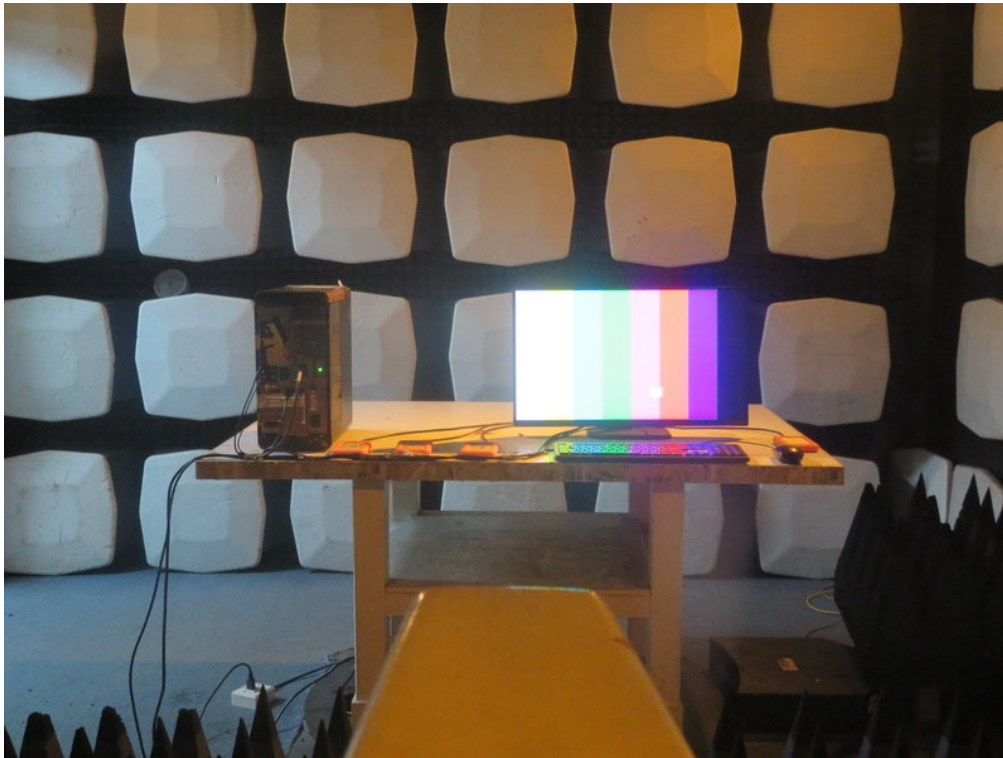

Electrical fast transient/burst immunity



Surge immunity



Immunity to conducted disturbances, induced by radio-frequency fields



### Power frequency magnetic field immunity



### Voltage dips, short interruptions and voltage variations immunity



End of Test Report