

HOFTRONIC™

DATASHEET LED T8 NANO TUBES 150CM

110 LM/WATT



Specifications

	SKU 399310	SKU 399303	SKU 398399
Input power	100-240V AC	100-240V AC	100-240V AC
Watts	24 Watt	24 Watt	24 Watt
Equivalent watts	58 Watt	58 Watt	58 Watt
Luminous flux	2640 Lumen	2640 Lumen	2640 Lumen
Light color	Daylight white	Neutral white	Warm white
Color temperature	6000K	4000K	3000K
Color rendering index (CRI)	>80	>80	>80
Beam angle	320°	320°	320°
Powerfactor	>0.9	>0.9	>0.9
Energy label	A+	A+	A+
IP-rate	IP20	IP20	IP20
Dimmable	No	No	No
Material	Fire-proof nanoplastic V0	Fire-proof nanoplastic V0	Fire-proof nanoplastic V0
Dimensions	1498 x 26 mm	1498 x 26 mm	1498 x 26 mm
Operation temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
Switching cycles	100.000 cycles	100.000 cycles	100.000 cycles
Life span	30.000 hours	30.000 hours	30.000 hours
Certification	CE, EMC, RoHS, LM80	CE, EMC, RoHS, LM80	CE, EMC, RoHS, LM80
Warranty	3 years	3 years	3 years
EAN	7439628399310	7439628399303	7439628398399




HOFTRONIC™

DATASHEET LED T8 NANO TUBES 150CM

110 LM/WATT




Specification

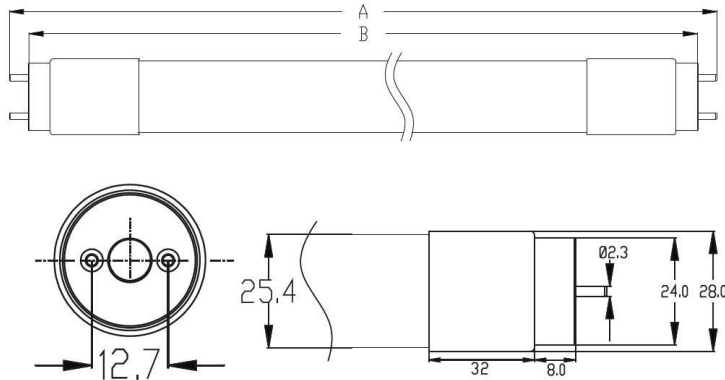

	2feet	3feet	4feet	5feet
	588 Dimension	892 Dimension	1198 Dimension	1498 Dimension
A:	602mm	906mm	1212mm	1512mm
B:	588mm	892mm	1198mm	1498mm

Beam angle

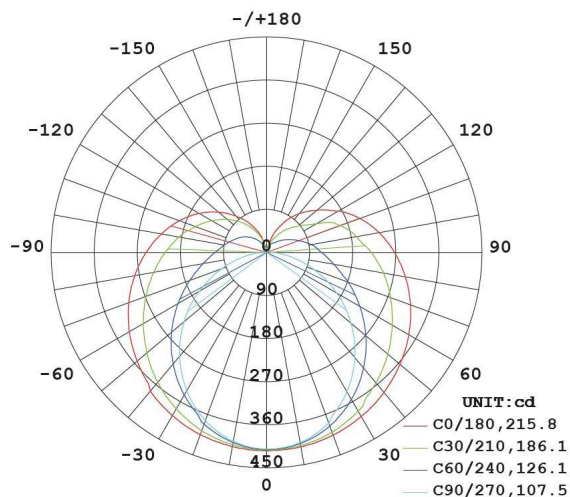

Illumination Distribution Drawing

