



# EMC TEST REPORT

For

**Shenzhen Chongxin Technology Co.,Ltd.**

**Automatic Pet Feeder**

Model No. : PP001,PP002, PP003, PP004, PP005

Prepared for : Shenzhen Chongxin Technology Co.,Ltd.  
403-404, 4th Floor, Block F, Danli Industrial Park, Nanwan  
Street, Longgang District, Shenzhen

Prepared By : Shenzhen STL Testing Technology Co., Ltd.  
Unit C, 4F, Building A, ShengHengji Industrial Park, No. 137  
FuYuan 1 Road, Heping Community, Fuyong Street, Baoan  
District, Shenzhen, China

Tel : (86) 755-82593673  
Fax : (86) 755-26609102

Report No. : STL2019E111556C-Y1

Date of Test : Nov .08-15 ,2019

Date of Rep. : Nov .15 ,2019



## TABLE OF CONTENT

Description	Page
Test Report Declaration	
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Test Facility.....	5
1.3. Uncertainty.....	5
<b>2. TEST INSTRUMENT USED.....</b>	<b>6</b>
<b>3. RADIATED EMISSION TEST.....</b>	<b>8</b>
3.1. Block Diagram of Test Setup.....	8
3.2. Test Standard.....	8
3.3. Radiated Emission Limit.....	9
3.4. EUT Configuration on Test.....	9
3.5. Operating Condition of EUT.....	9
3.6. Test Procedure.....	10
3.7. Radiated Emission Test Result.....	10
<b>4. ELECTROSTATIC DISCHARGE TEST.....</b>	<b>11</b>
4.1. Block Diagram of Test Setup.....	11
4.2. Test Standard.....	11
4.3. Severity Levels and Performance Criterion.....	11
4.4. EUT Configuration on Test.....	13
4.5. Operating Condition of EUT.....	13
4.6. Test Procedure.....	13
4.7. Test Results.....	13

APPENDIX I ----- Radiated Emission Test Data

APPENDIX II ----- Photographs of the EUT



### TEST REPORT DECLARATION

Applicant : Shenzhen Chongxin Technology Co.,Ltd.

Manufacturer : Shenzhen Chongxin Technology Co.,Ltd.

EUT Description : Automatic Pet Feeder

(A) Model No. : PP001,PP002, PP003, PP004, PP005

(B) Serial No. : N/A

(C) Power Supply : DC 5V

**Test Procedure Used:**

**EMI:** EN 55014-1:2006+A1:2009+A2:2011

**EMS:** EN 55014-2:1997+A1:2001+A2:2008 (EN61000-4-2: 2009)

The device described above has been tested by **Shenzhen ECT Testing Technology Co., Ltd** to determine the maximum emission levels emanating from the device, the severe levels that the device can endure and EUT'S performance criterion. The test results are contained in this test report. **Shenzhen ECT Testing Technology Co., Ltd** is assumed of full responsibility for the accuracy and completeness of these tests. Also, this report shows that the EUT is technically compliant with the EN55014-1 and EN55014-2 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of **Shenzhen STL Testing Technology Co., Ltd.**

Date of Test: Nov .08-15 ,2019

Prepared by: Eris  
Project Engineer

Reviewed by: Lewis  
Project Manager

Approved by: Jestria  
Technical Director







## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

Description : Automatic Pet Feeder

Model Number : PP001, PP002, PP003, PP004, PP005

Applicant : Shenzhen Chongxin Technology Co., Ltd.  
Address : 403-404, 4th Floor, Block F, Danli Industrial Park,  
Nanwan Street, Longgang District, Shenzhen

Manufacturer : Shenzhen Chongxin Technology Co., Ltd.  
Address : 403-404, 4th Floor, Block F, Danli Industrial Park,  
Nanwan Street, Longgang District, Shenzhen

Date of Test : Nov .08-15 ,2019

## 1.2. Test Summary

Test Items	Standards	Status
Power line conducted emission test	EN 55014-1:2006+A1:2009+A2:2011	N/A
Radiated emission test	EN 55014-1:2006+A1:2009+A2:2011	Complied
Harmonic Current Emission test	EN 61000-3-2:2014	N/A
Voltage fluctuations & flicker test	EN 61000-3-3:2013	N/A
Electrostatic discharge Test	EN 61000-4-2: 2009	Complied
RF Field strength susceptibility Test	EN 61000-4-3: 2006+A1:2008+A2:2010	N/A
Electrical fast transient/Burst Test	EN 61000-4-4: 2012	N/A
Surge Test	EN 61000-4-5: 2006	N/A
Injected currents susceptibility test	EN 61000-4-6: 2014	N/A
Magnetic field immunity test	EN 61000-4-8: 2010	N/A
Voltage dips and interruptions test	EN 61000-4-11: 2004	N/A

## 1.3. Test Facility

Test Firm	: Shenzhen STL Testing Technology Co., Ltd.
Address	: Unit C, 4F, Building A, ShengHengji Industrial Park, No. 137 FuYuan 1 Road, Heping Community, Fuyong Street, Baoan District, Shenzhen, China
Tel	: (86) 755-82593673
Fax	: (86) 755-26609102

## 1.4. Uncertainty

Radiated Emission Uncertainty =  $\pm 4.26\text{dB}$



## 2. TEST INSTRUMENT USED

No.	Equipment	Manufacturer	Model No.	S/N	Cal. Date	Next Cal. Date
1	ESD TESTER	HAEFELY	PESD1610	H401552	2019.01.16	2020.01.15
2	MAGNETIC FIELD TESTER	HAEFELY	MAG100	150577	2019.01.16	2020.01.15
3	5kVA AC POWER SOURCE	CALIFORNIA INSTRUMENTS	5001ix-400	55692	2019.01.16	2020.01.15
4	HARMONICS/FLICKER TEST ANALYZER	CALIFORNIA INSTRUMENTS	PACS-1	72254	2019.01.16	2020.01.15
5	50Ω COAXIAL SWITCH	ANRITSU	MP59B	6200283933	2019.01.16	2020.01.15
6	CONICAL HOUSING	ATC	N/A	N/A	N/A	N/A
7	VOLTAGE PROBE	SCHWARZBECK	TK9416	N/A	2019.01.16	2020.01.15
8	RF CURRENT PROBE	ROHDE& SCHWARZ	EZ-17	100048	2019.01.16	2020.01.15
9	BILOG ANTENNA	SCHWARZBECK	VULB9163	194	2019.01.16	2020.01.15
10	SPECTRUM ANALYZER	ANRITSU	MS2651B	N/A	2019.01.16	2020.01.15
11	PRE-AMPLIFIER	AGILENT	8447D	294A10619	2019.01.16	2020.01.15
12	RF COAXIAL CABLE(844 CHAMBER)	SCHWARZBECK	N-5m	NO.1	2019.01.16	2020.01.15
13	THERMO-HYGROMETER	OREGON SCIENTIFIC	JB913R	GZ-WS004	2019.01.16	2020.01.15
14	1# SHIELDING ROOM	CHANGZHOU ZHONGYU	843	N/A	N/A	N/A
15	2# SHIELDING ROOM	CHANGZHOU ZHONGYU	843	N/A	N/A	N/A
16	3m Semi-ANECHOIC CHAMBER	CHANGZHOU ZHONGYU	844	N/A	N/A	N/A
17	ANTENNA/TURNTABLE CONTROLLER	INNCO	CO2000	CO2000/077/7301203/L	N/A	N/A
18	101 LCR METER	YANGZHI	YD2810B	20101170	2019.01.16	2020.01.15
19	RF COAXIAL CABLE(844 CHAMBER)	NTGS8017	N-1m	NO.6	2019.01.16	2020.01.15
20	RF COAXIAL CABLE(844 CHAMBER)	NTGS8017	N-1m	NO.7	2019.01.16	2020.01.15
21	AUDIO GENERATOR	GW	GAG-809	EG835424	N/A	N/A
22	THERMO-HYGROMETER	OREGON SCIENTIFIC	JB913R	GZ-WS002	2019.01.16	2020.01.15




No.	Equipment	Manufacturer	Model No.	S/N	Cal. Date	Next Cal. Date
23	EMCPRO SYSTEM (IMMUNITY TESTER)	THERMO	PRO-BASE	0403271	2019.01.16	2020.01.15
24	CAPACITIVE CLAMP (EFT)	THERMO	PRO-CCL	0403272	2019.01.16	2020.01.15
25	COUPLER DECOUPLER FOR TELECOM LINES	THERMO	CM-TEL-CD	0403273	2019.01.16	2020.01.15
26	L.I.S.N.	ROHDE& SCHWARZ	ESH3-Z5	100305	2019.01.16	2020.01.15
27	EMI TEST RECEIVER	ROHDE& SCHWARZ	ESPI-3	100396/003	2019.01.16	2020.01.15
28	SIGNAL GENERATOR	ROHDE& SCHWARZ	SML01	101161	2019.01.16	2020.01.15
29	EMI TEST RECEIVER	ROHDE& SCHWARZ	ESPI-3	101526/003	2019.01.16	2020.01.15
30	SPECTRUM ANALYZER	AGILENT	E7405A	MY45115511	2019.01.16	2020.01.15
31	L.I.S.N.	SCHWARZBECK	NSLK8126	8126431	2019.01.16	2020.01.15
32	PULSE LIMITER (FOR ESPI3)	ROHDE& SCHWARZ	ESH3-Z2	100815	2019.01.16	2020.01.15
33	PRE-AMPLIFIER	ROHDE& SCHWARZ	CBLU1183540-0 1	3791	2019.01.16	2020.01.15
34	50Ω COAXIAL SWITCH	ANRITSU	MP59B	6200506474	2019.01.16	2020.01.15
35	BILOG ANTENNA	SCHWARZBECK	VULB9163	9163-323	2019.01.16	2020.01.15
36	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D-655	2019.01.16	2020.01.15
37	HORN ANTENNA	SCHWARZBECK	BBHA9170	9170-359	N/A	N/A
38	LOOP ANTENNA	SCHWARZBECK	FMZB1516	1516131	2019.01.16	2020.01.15
39	ULTRA COMPACT SIMULATOR	EM TEST	UCS 500 N5	V0928104968	2019.01.16	2020.01.15
40	CAPACITIVE CLAMP	EM TEST	HFK	0509-34	2019.01.16	2020.01.15
41	Transformer	EM TEST	V4780S2	0109-44	N/A	N/A
42	Conducted Immunity Test System	FRANKONIA	CIT-10	126B1121	2019.01.16	2020.01.15
43	CDN	FRANKONIA	CDN-M2/3	A3027020	2019.01.16	2020.01.15
44	EM Injection Clamp	FCC	F-2031-23mm	091824	2019.01.16	2020.01.15
45	LISN	AFJ	LS16C	16010946249	2019.01.16	2020.01.15
46	CLICK METER	AFJ	CL55C	55040947164	2019.01.16	2020.01.15

### 3. RADIATED EMISSION TEST


#### 3.1. Block Diagram of Test Setup

##### 3.1.1. Block Diagram of EUT Test Setup



*(EUT: Automatic Pet Feeder)*

##### 3.1.2. Anechoic Chamber Setup Diagram

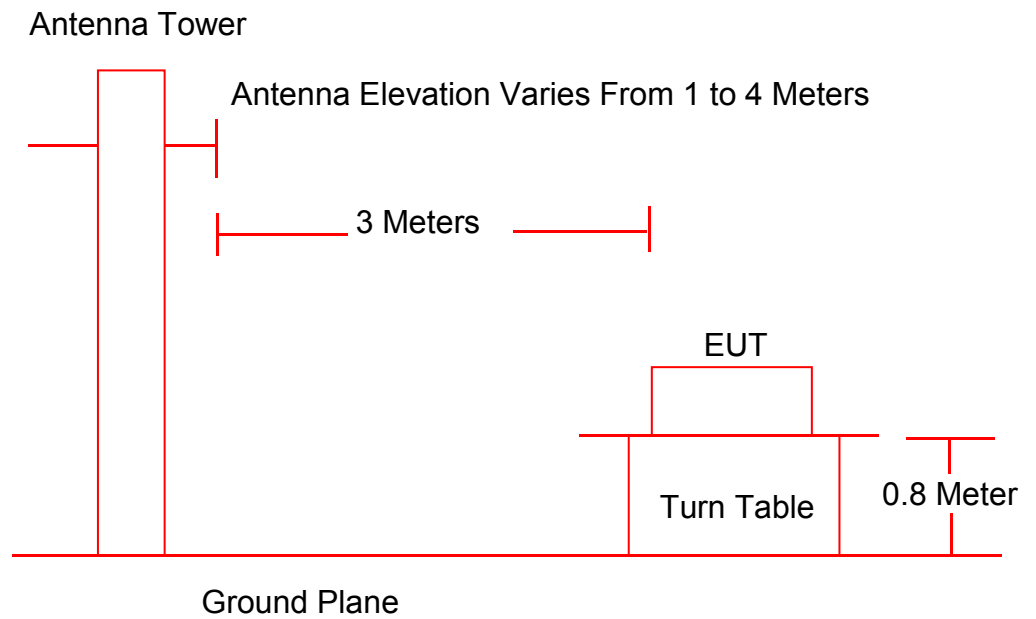

*(EUT: Automatic Pet Feeder)*

#### 3.2. Test Standard

EN 55014-1:2006+A1:2009+A2:2011



### 3.3.Radiated Emission Limit

Frequency MHz	Distance (Meter/s)	Field Strengths Limits dB( $\mu$ V)/m
30 ~ 230	3	40.0
230 ~ 1000	3	47.0

Remark: (1) Emission level (dB ( $\mu$  V)/m) = 20 log Emission level ( $\mu$ V/m)

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

### 3.4.EUT Configuration on Test

The EN 55014-1 regulations test method must be used to find the maximum emission during radiated emission test.

#### 3.4.1. Automatic Pet Feeder (EUT)

(A) Model No. : PP002

(B) Serial No. : N/A

(C) Manufacturer : Shenzhen Chongxin Technology Co.,Ltd.

### 3.5.Operating Condition of EUT

3.5.1. Setup the EUT and simulators as shown in Section 3.1.

3.5.2. Turn on the power of all equipments.

3.5.3. Let the EUT work in test mode and test it.

### 3.6. Test Procedure

The EUT and its simulators are placed on a turned table that is 0.8 meter above the ground. The turned table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna that is mounted on the antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. In order to find the maximum emission levels, the interface cable must be manipulated according to EN55014-1 on radiated emission test.

The bandwidth setting on the field strength meter (R & S Test Receiver ESPI) is set at 120 KHz.

The frequency range from 30 MHz to 1000 MHz is investigated. The test data are listed in the Section 3.7 and the scanning waveform are attached within Appendix I.

### 3.7. Radiated Emission Test Result

**PASS.**


The frequency spectrum from 30 MHz to 1000 MHz is investigated.

Detailed information, please see the appendix (I) file.

## 4. ELECTROSTATIC DISCHARGE TEST


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block Diagram of EUT Test Setup



(EUT: Automatic Pet Feeder)

#### 4.1.2. ESD Test Setup

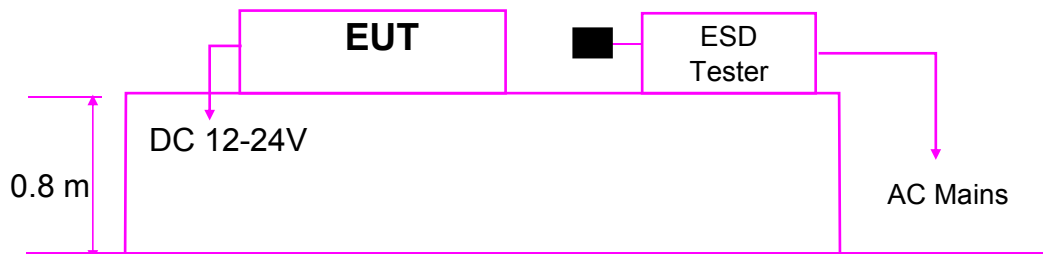

Remark: ■ is Discharge Electrode

(EUT: Automatic Pet Feeder)

### 4.2. Test Standard

EN 55014-2:1997+A1:2001+A2:2008 (EN61000-4-2: 2009)

### 4.3. Severity Levels and Performance Criterion

Severity Level 3 for Air Discharge at 8KV

Severity Level 2 for Contact Discharge at 4KV

Severity Level:

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

Performance criterion: **A**

#### 4.4.EUT Configuration on Test

The following equipments are installed on electrostatic discharge test to meet EN55014-1 requirement and operating in a manner.

#### 4.5.Operating Condition of EUT

- 4.5.1.Setup the EUT as shown in Section 4.1.
- 4.5.2.Turning on the power of all equipments .
- 4.5.3.Let the EUT work in test mode and test it.

#### 4.6.Test Procedure

##### 4.6.1.Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

##### 4.6.2.Contact Discharge:

All the procedure shall be same as Section 4.6.1 except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

##### 4.6.3.Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode position is vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

##### 4.6.4.Indirect discharge for vertical coupling plane

At least 20 single discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

#### 4.7.Test Results

**PASS.**

Detailed information, Please refer to the following page.



## Electrostatic Discharge Test Results

EUT	: Automatic Pet Feeder	Temperature	: 22°C
M/N	: PP002	Humidity	: 55%
Power Supply	: DC 5V	Test Mode	: ON
Air Discharge: ±8KV For each point positive 10 times and negative 10 times discharge. Contact Discharge: ±4KV			
Location	Kind A-Air Discharge C-Contact Discharge	Result	
Slot	A	PASS	
HCP	C	PASS	
VCP	C	PASS	
Remark: Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).	Test Equipment: See Clause 2.		






# APPENDIX I

## Radiated Emission Test Data



### Radiated Emission

Engineer : Andy	
EUT :Automatic Pet Feeder	Time : 2019/11/11
Limit : EN 55014-1	Comment : 20°C/50%
MN: PP002	Note : Hor

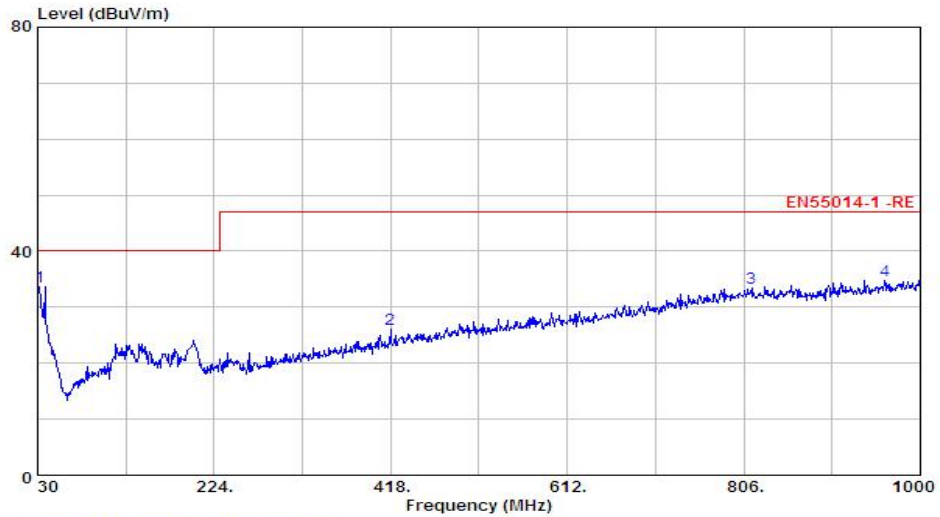


Condition : EN55014-1 -RE 3m HORIZONTAL  
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Fol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1 max	31.94	33.69	40.00	-6.31	Peak	HORIZONTAL
2	418.00	26.15	47.00	-20.85	Peak	HORIZONTAL
3	814.73	33.51	47.00	-13.49	Peak	HORIZONTAL
4	961.20	34.77	47.00	-12.23	Peak	HORIZONTAL



### Radiated Emission

Engineer : Andy	
EUT :Automatic Pet Feeder	Time : 2019/11/11
Limit : EN 55014-1	Comment : 22°C/55%
MN: PP002	Note : Ver

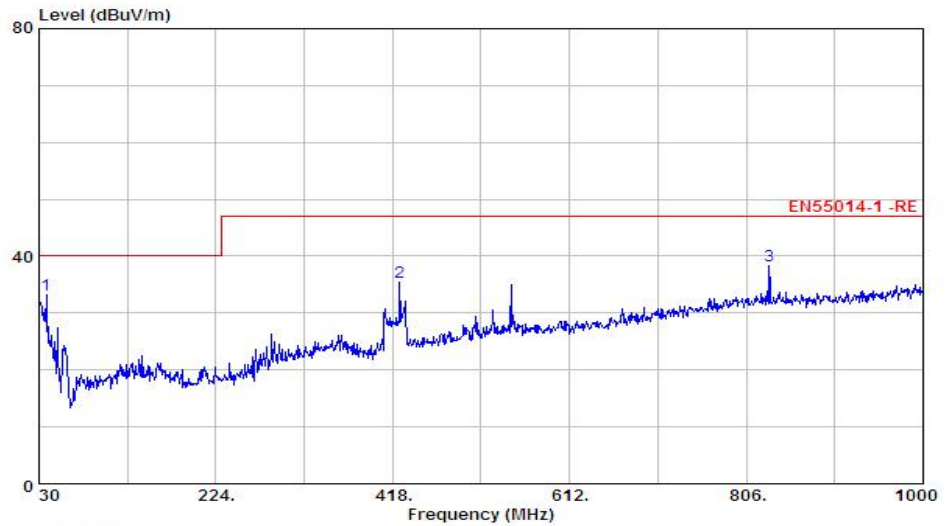

Condition : EN55014-1 -RE 3m VERTICAL  
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1	max	37.76	33.24	40.00	-6.76 Peak	VERTICAL
2		425.76	35.38	47.00	-11.62 Peak	VERTICAL
3		831.22	38.39	47.00	-8.61 Peak	VERTICAL



# **APPENDIX II**

## **Photographs of the EUT**

**FIGURE 1**



**FIGURE 2**





**FIGURE 3**



**FIGURE 4**



**FIGURE 5**



**FIGURE 6**




**FIGURE 7**



**FIGURE 8**



**FIGURE 9**

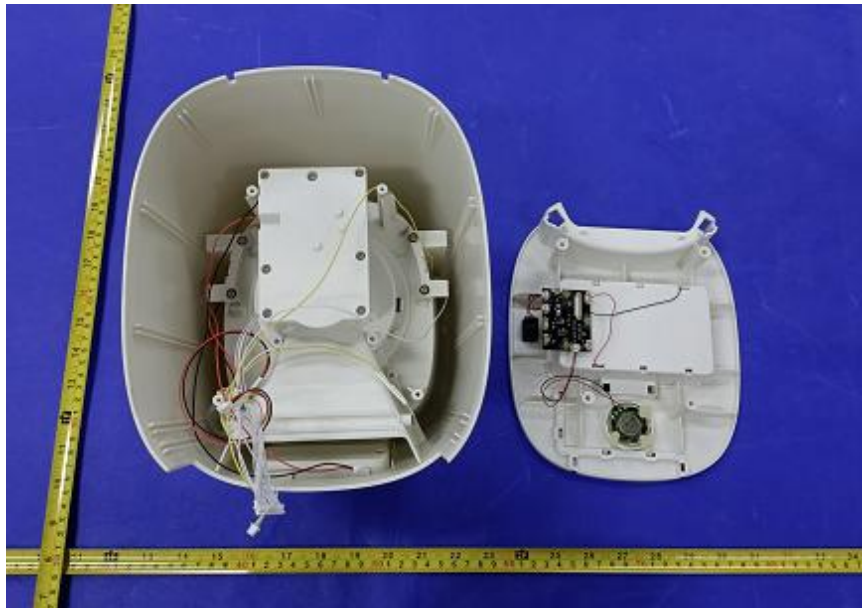

**FIGURE 10**

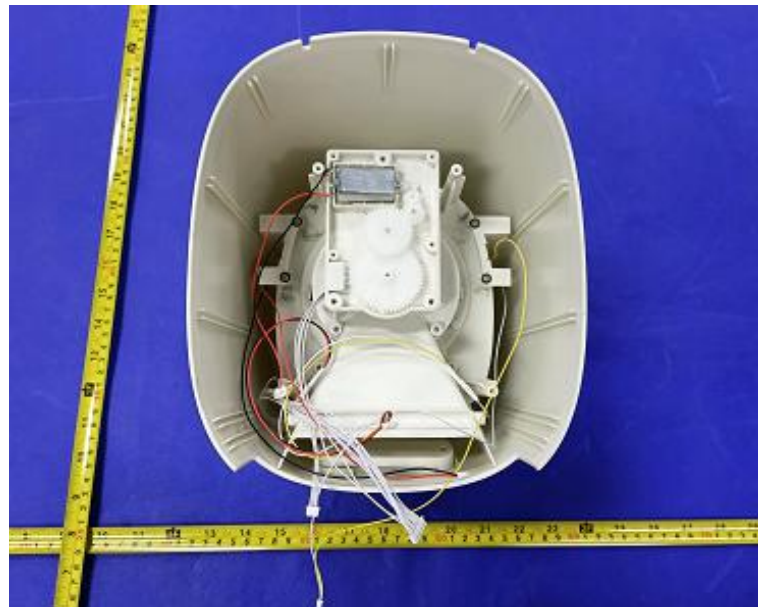


FIGURE 11

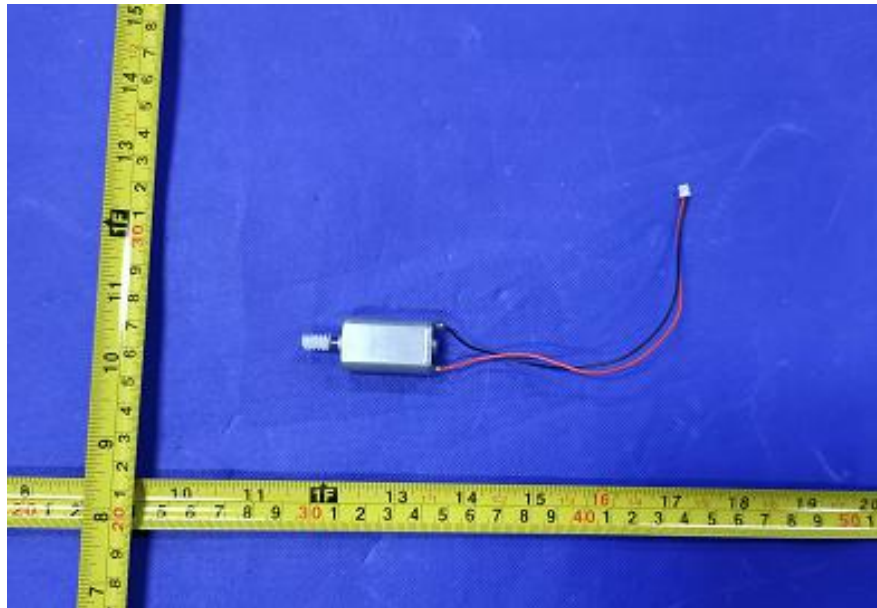


FIGURE 12

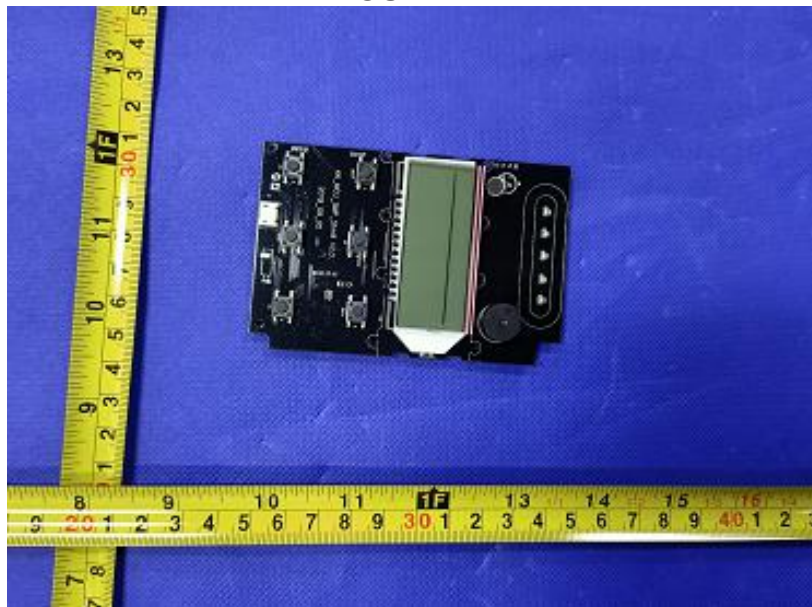




FIGURE 13

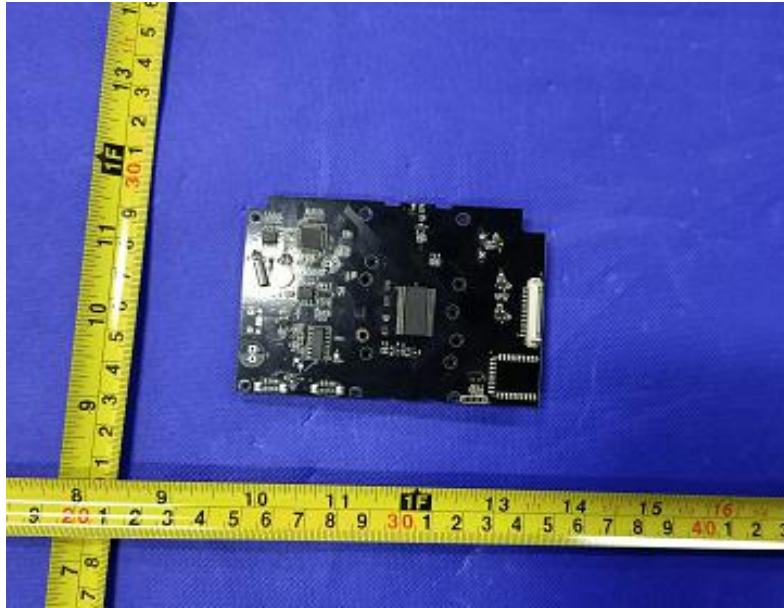


FIGURE 14

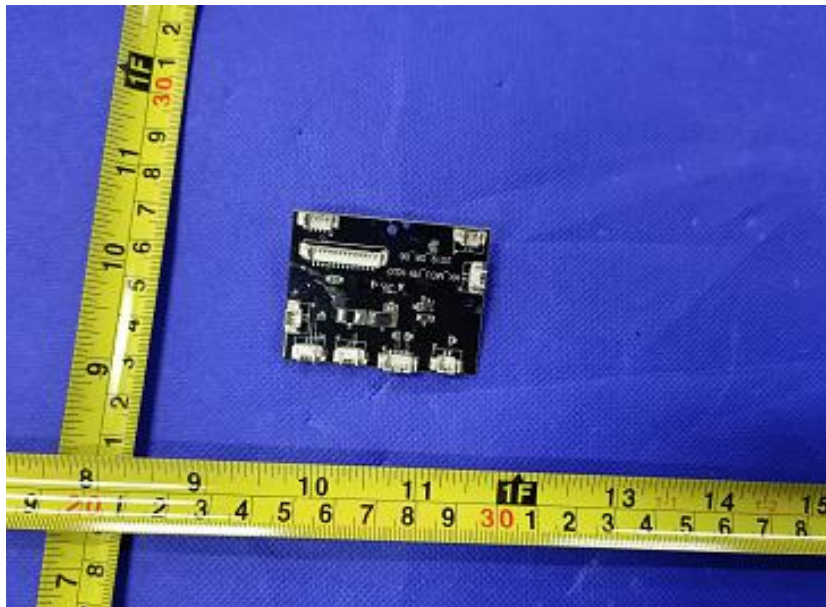


FIGURE 15


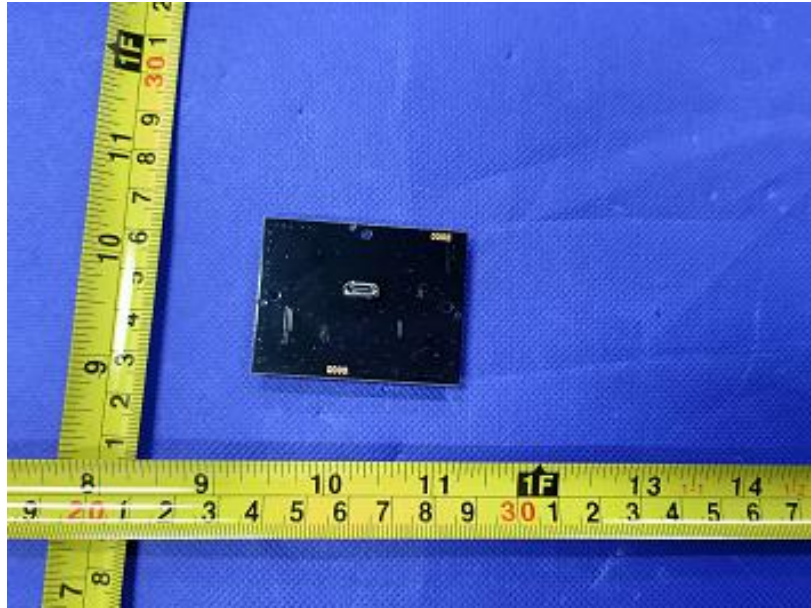


FIGURE 16

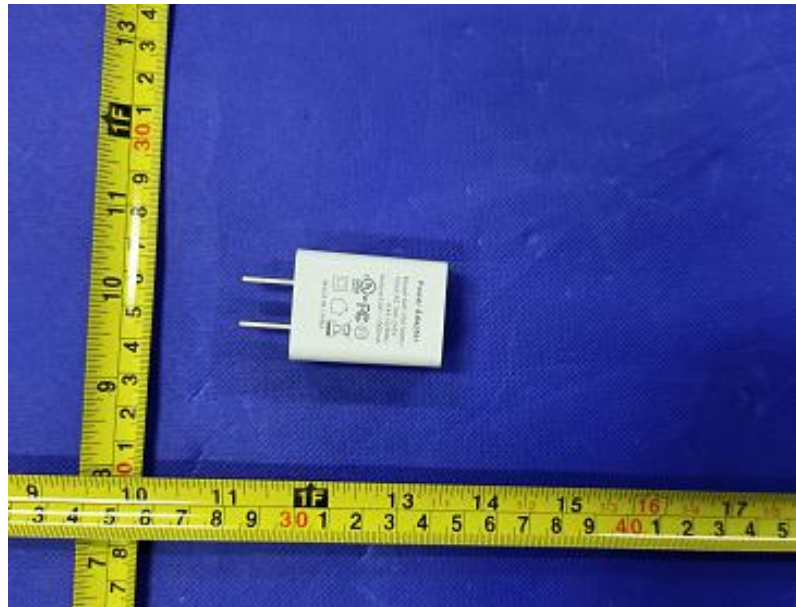

\*\*\*End of Report\*\*\*