


Fuse-link D

Technical data	
Rated voltage U_n	500 V AC, 600 V AC, 750 V AC, 1200 V AC, 400 V DC
Rated current I_n	DI, DII 2 - 25 A, DIII 32 - 63 A DIV 80 - 100 A, DV 125 - 200 A
Breaking capacity at 1,1 U_n	50 kA AC $\cos\phi = 0,2$ 8 kA DC $T = 15 \text{ ms}$
Fusing characteristics	gG, TDZ, DZ
Insulating class	C - VDE 0110
Standards	DIN EN 60269-1, IEC 60269-1:2005-04 (VDE 0636 Teil 10): 1999-11 DIN EN 60269-3, IEC 60269-3:2003 (VDE 0636 Teil 30): 1995-12 DIN EN 60269-3-1, IEC 60269-3-1: 2004-07 (VDE 0636 Teil 301): 1998-01 DIN VDE 0635/02.84


DI for fuse base E 16

I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
2	13,2	6
4	13,2	6
6	13,2	6
10	13,2	8
16	13,2	10
20	13,2	12
25	13,2	14




DII for fuse base E 27

I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
2	21,5	6
4	21,5	6
6	21,5	6
10	21,5	8
13	21,5	8
16	21,5	10
20	21,5	12
25	21,5	14




DIII for fuse base E 33

I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
32	27	16
35	27	16
40	27	16
50	27	18
63	27	20




DIV for fuse base R1 1/4"

I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
80	33	5
100	33	7



DIII gG, 690 V a.c., 600 V d.c.

I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
2	27	6
4	27	6
6	27	6
10	27	8
16	27	10
20	27	12
25	27	14
35	27	16
50	27	18
63	27	20

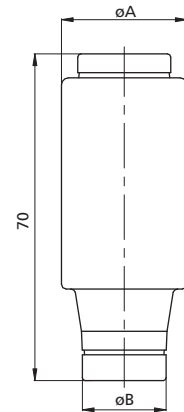


DV for fuse base R 2"

I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
125	46	5
160	46	7
200	46	9


DIII gF, 750V a.c.

I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
2	27	6
4	27	6
6	27	6
10	27	8
16	27	10
20	27	12
25	27	14
35	27	16

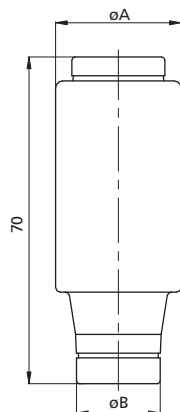


DIII gF, 1200 V a.c.


I_n [A]	dimension	
	$\varnothing A$	$\varnothing B$
2	27	6
4	27	6
6	27	6
10	27	8
16	27	10
20	27	12
25	27	14
35	27	16

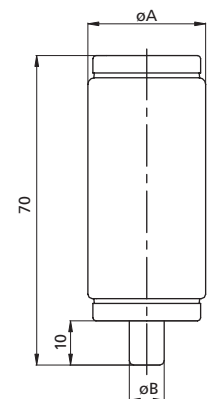

Time current characteristics I/t, gG

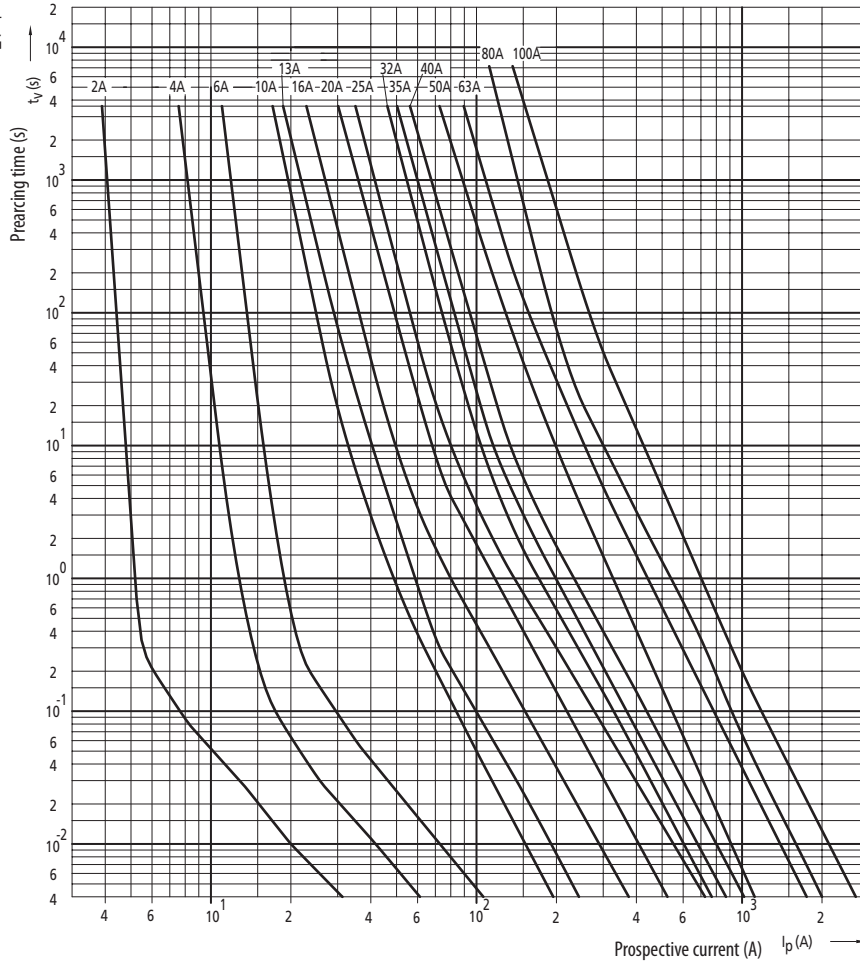


Cut-off current characteristics

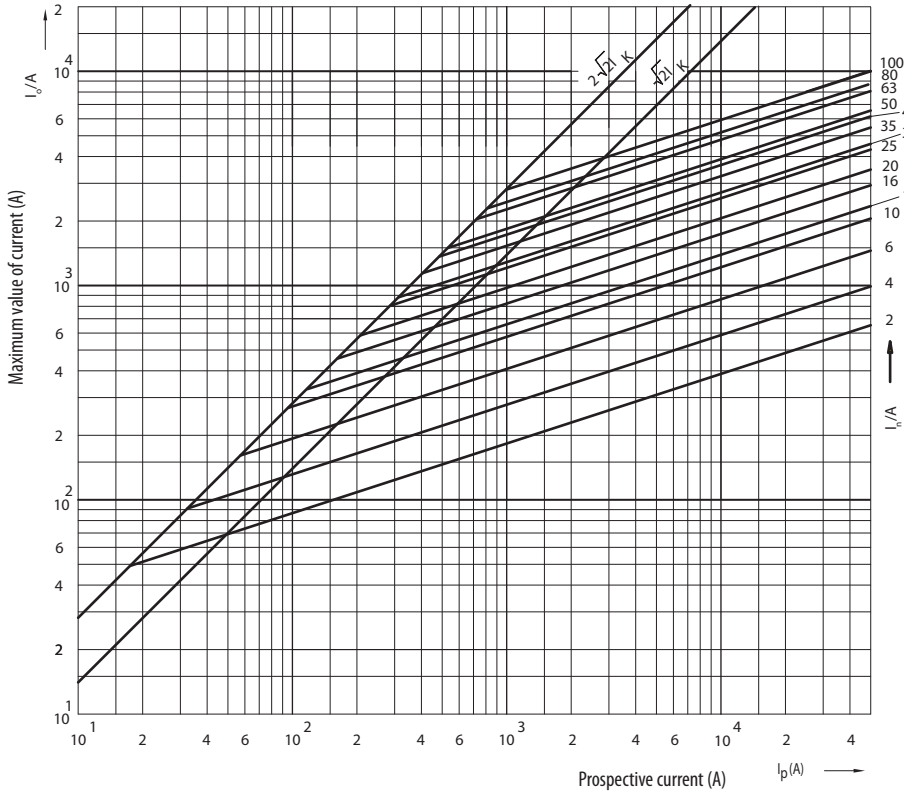




Technical data

Melting energy characteristics I^2t

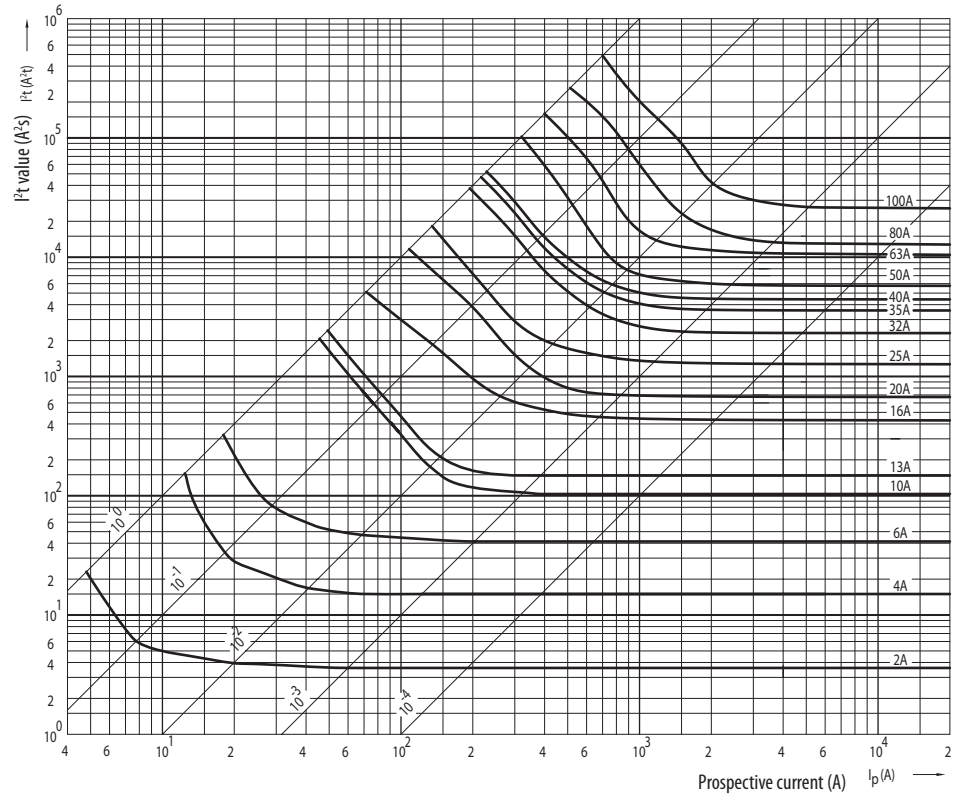

Time current characteristics I/t DZ

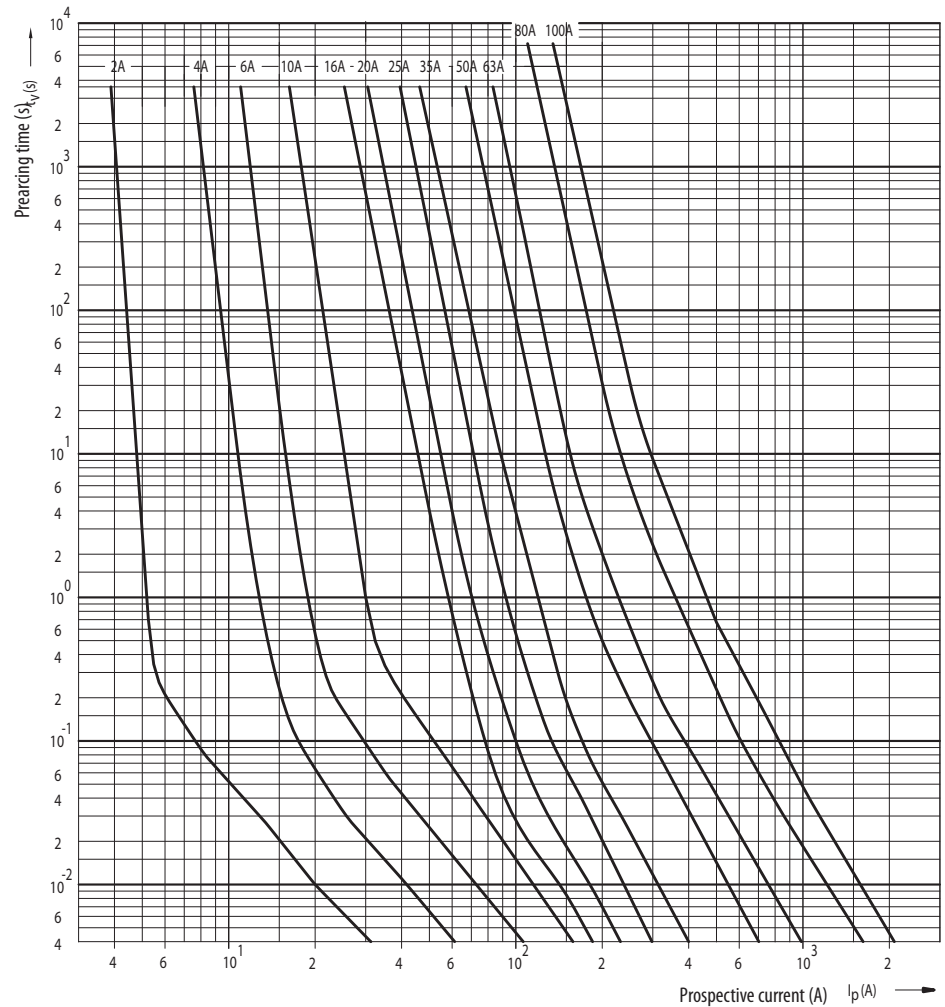

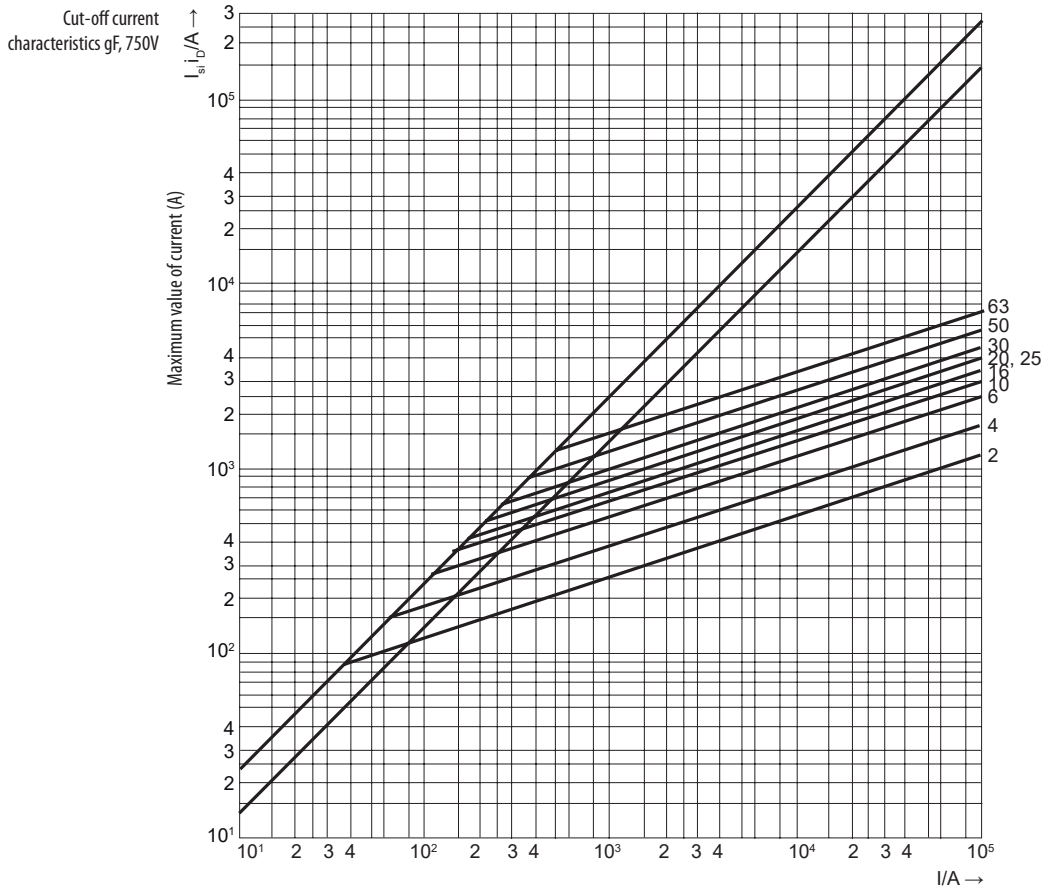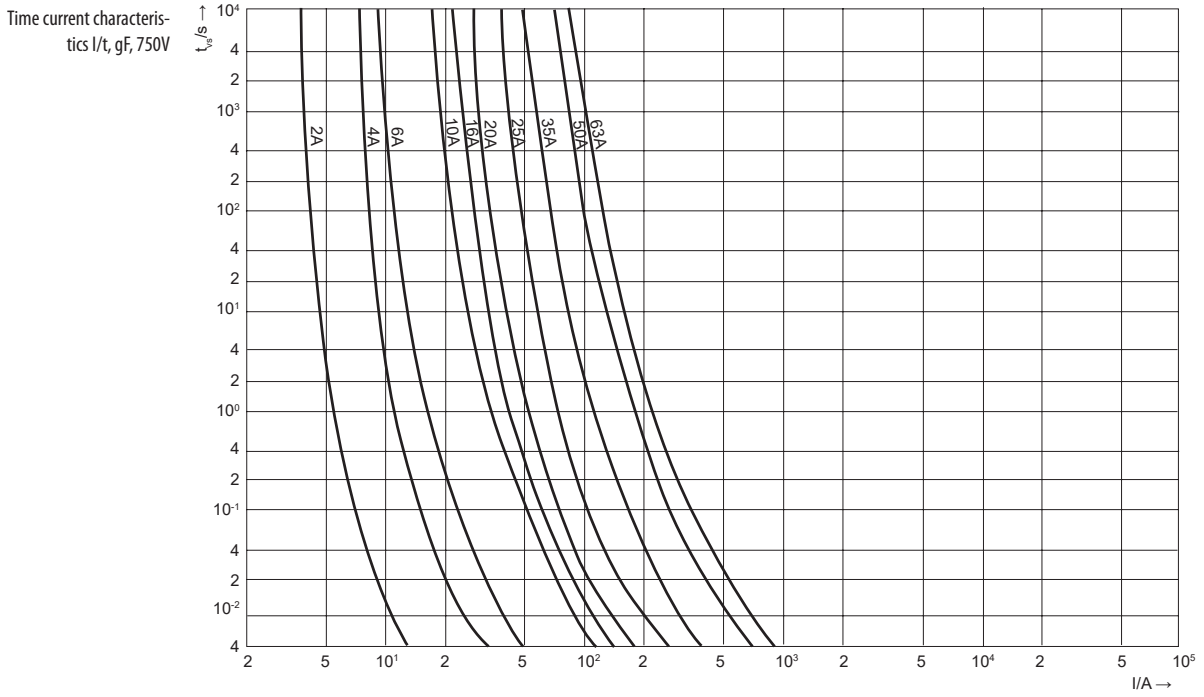

Technical data

